… NPDAs continued

Pushing Strings

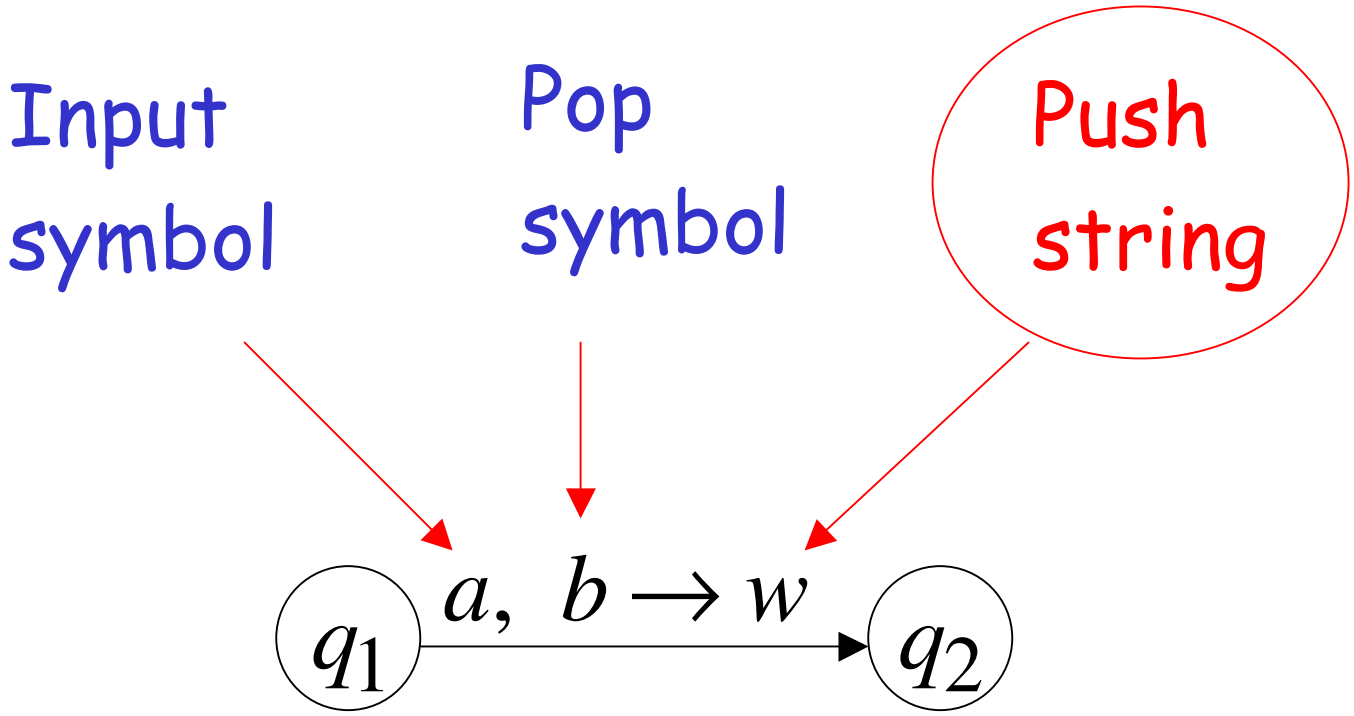

Example:

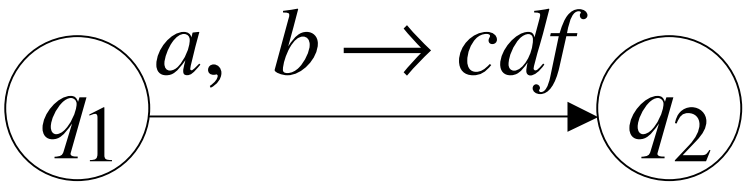

input

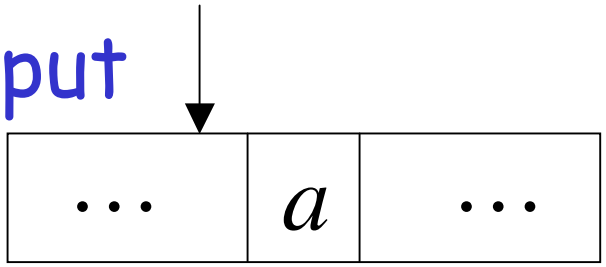

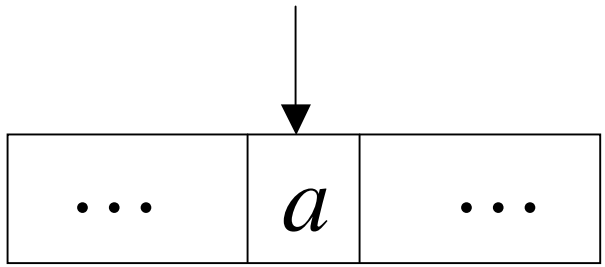

stack

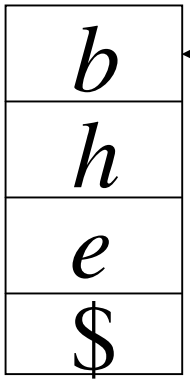

top

Push

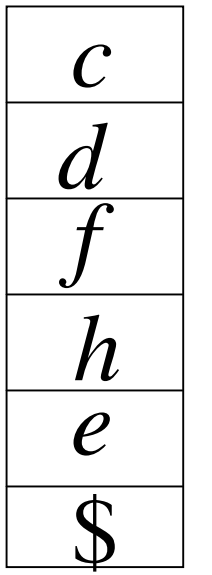

pushed string

Another NPDA example

NPDA M

$$L(M) = \{w: \quad n_a = n_b\}$$

$a, \$ \to 0\$ \qquad b, \$ \to 1\$$

$a, 0 \to 00 \qquad b, 1 \to 11$

$a, 1 \to \lambda \qquad b, 0 \to \lambda$

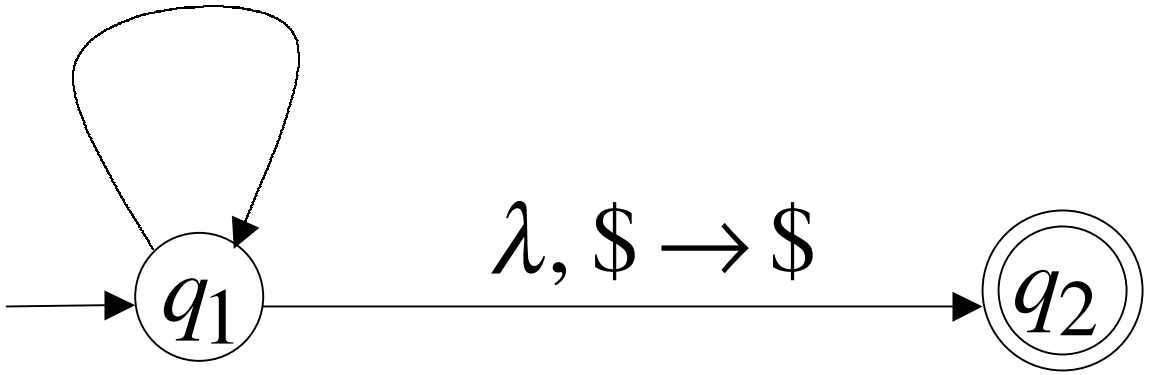

Execution Example: Time 0

Input

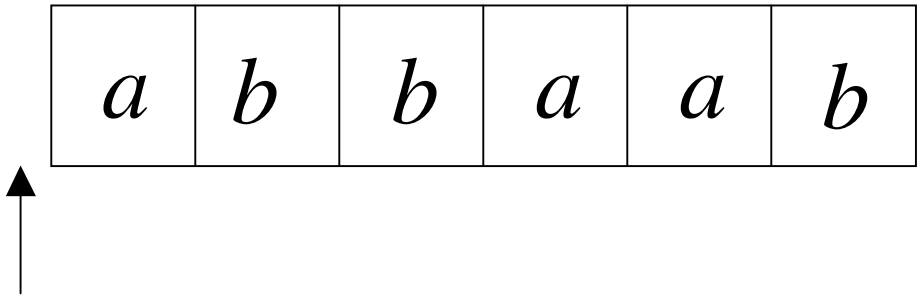



Stack

$a, \$ \rightarrow 0\$$ $b, \$ \rightarrow 1\$$

$a, 0 \rightarrow 00$ $b, 1 \rightarrow 11$

$a, 1 \rightarrow \lambda$ $b, 0 \rightarrow \lambda$

current state

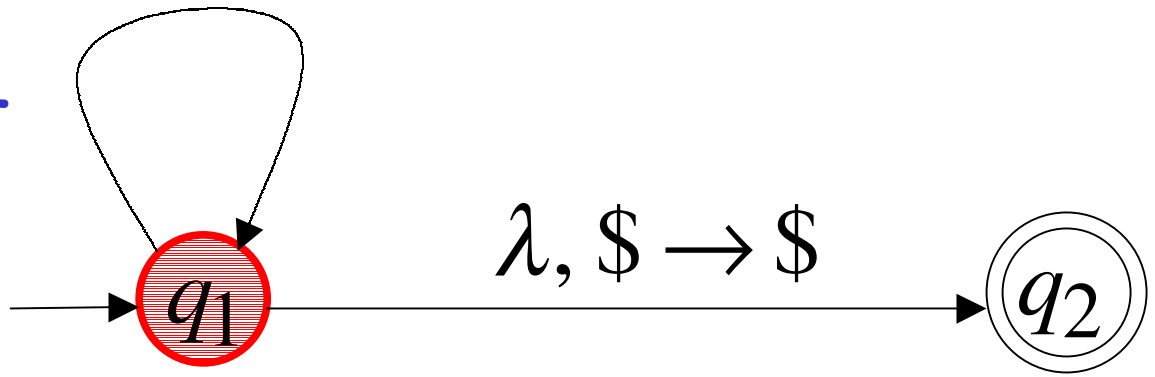

Time 1

Input

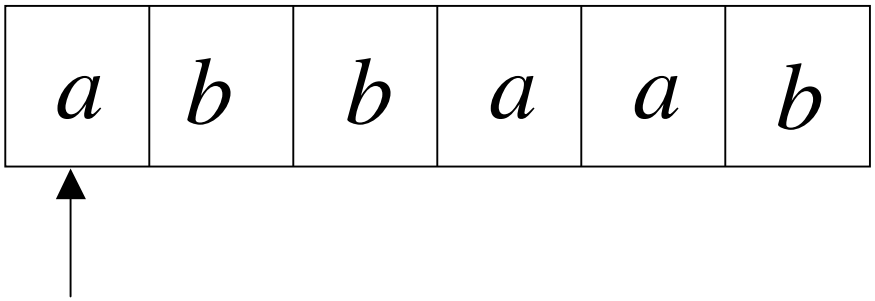



Stack

$a, \$ \rightarrow 0\$$ $b, \$ \rightarrow 1\$$

$a, 0 \rightarrow 00$ $b, 1 \rightarrow 11$

$a, 1 \rightarrow \lambda$ $b, 0 \rightarrow \lambda$

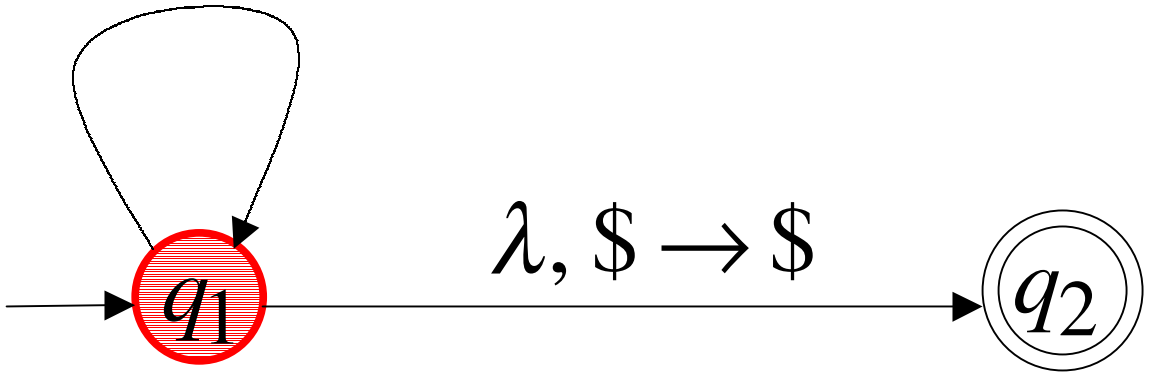

Time 3

Input

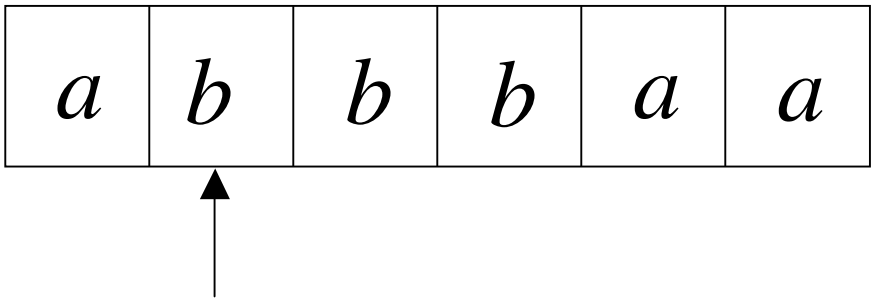



Stack

$a, \$ \rightarrow 0\$$ $b, \$ \rightarrow 1\$$

$a, 0 \rightarrow 00$ $b, 1 \rightarrow 11$

$a, 1 \rightarrow \lambda$ $b, 0 \rightarrow \lambda$

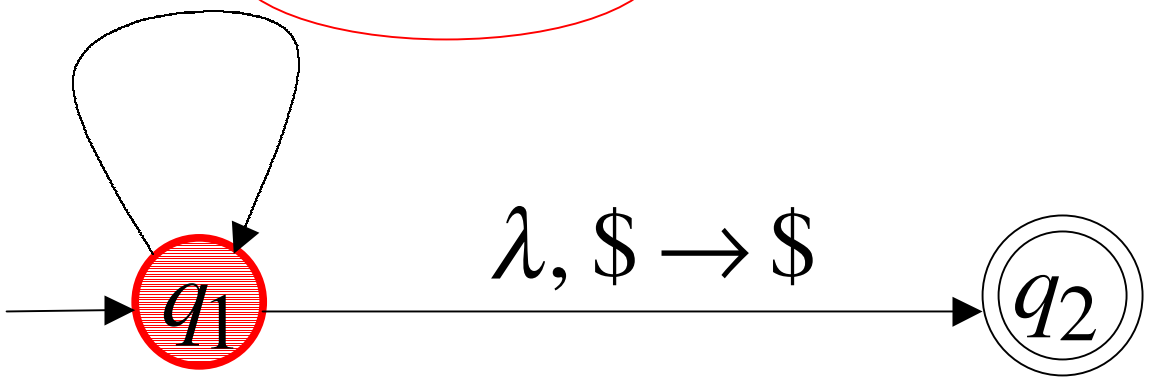

Time 4

Input

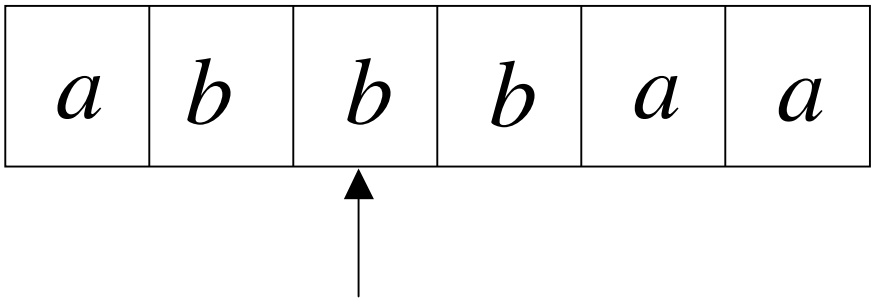



Stack

$a, \$ \rightarrow 0\$$ $b, \$ \rightarrow 1\$$

$a, 0 \rightarrow 00$ $b, 1 \rightarrow 11$

$a, 1 \rightarrow \lambda$ $b, 0 \rightarrow \lambda$

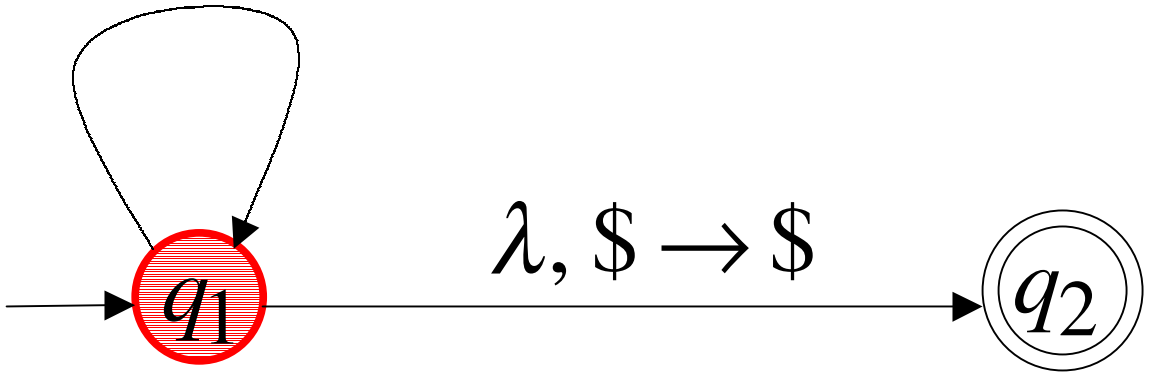

Time 5

Input

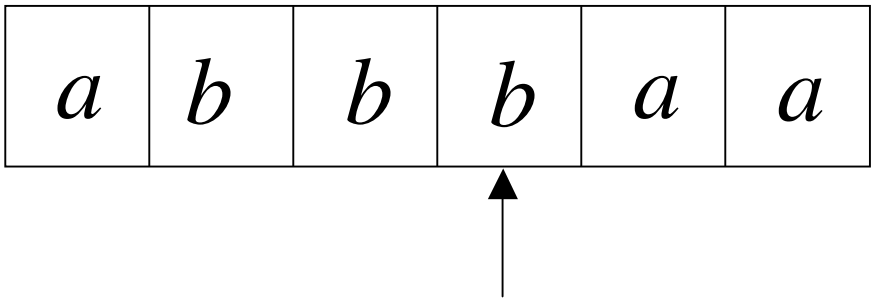

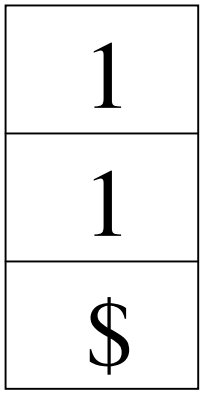

Stack

$a, \$ \rightarrow 0\$$ $b, \$ \rightarrow 1\$$

$a, 0 \rightarrow 00$ $b, 1 \rightarrow 11$

$a, 1 \rightarrow \lambda$ $b, 0 \rightarrow \lambda$

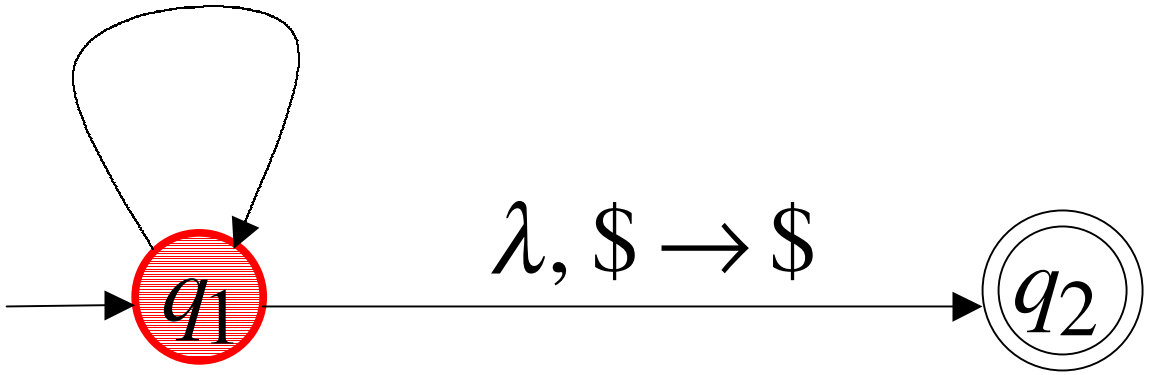

Time 6

Input

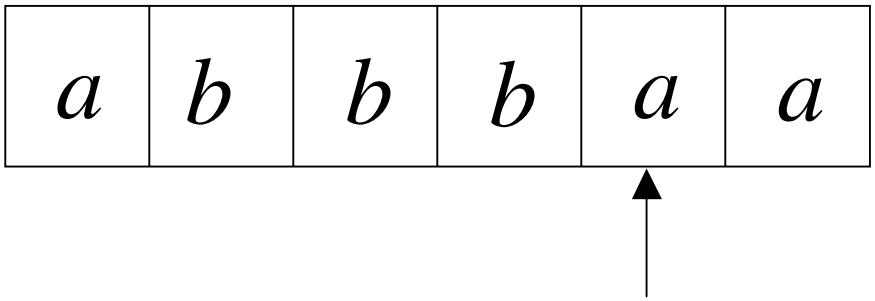

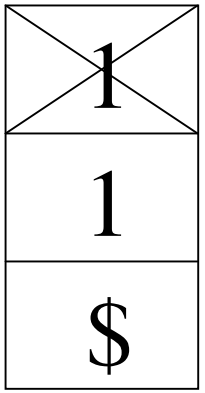

Stack

$a, \$ \rightarrow 0\$$ $b, \$ \rightarrow 1\$$

$a, 0 \rightarrow 00$ $b, 1 \rightarrow 11$

$a, 1 \rightarrow \lambda$ $b, 0 \rightarrow \lambda$

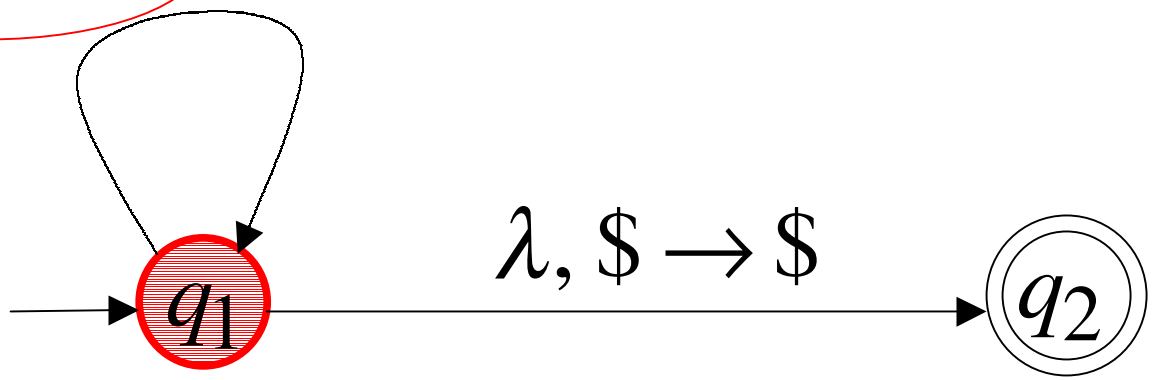

Time 7

Input

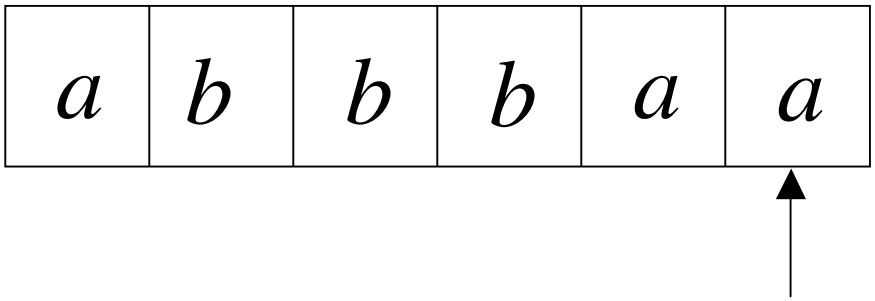



Stack

$a, \$ \rightarrow 0\$$ $b, \$ \rightarrow 1\$$

$a, 0 \rightarrow 00$ $b, 1 \rightarrow 11$

$a, 1 \rightarrow \lambda$ $b, 0 \rightarrow \lambda$

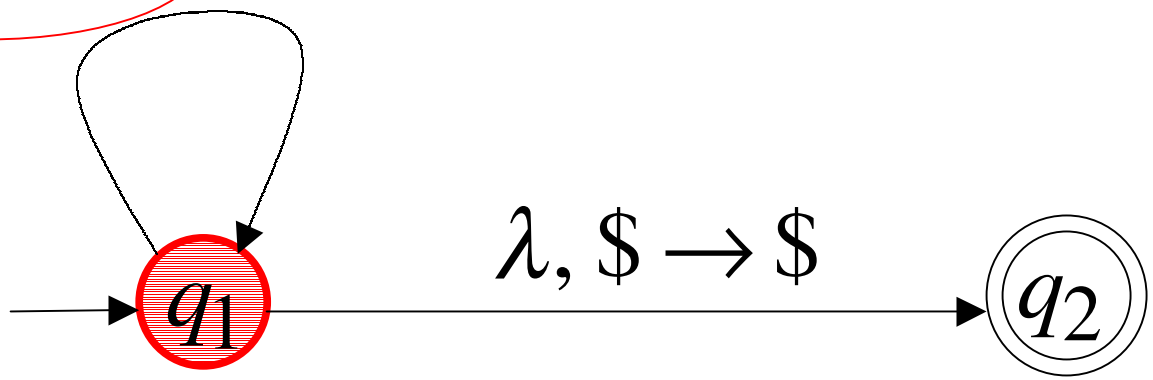

Time 8

Input

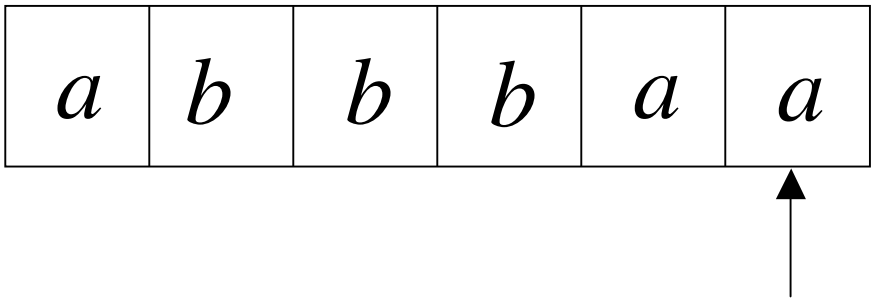



Stack

$a, \$ \rightarrow 0\$$ $b, \$ \rightarrow 1\$$

$a, 0 \rightarrow 00$ $b, 1 \rightarrow 11$

$a, 1 \rightarrow \lambda$ $b, 0 \rightarrow \lambda$

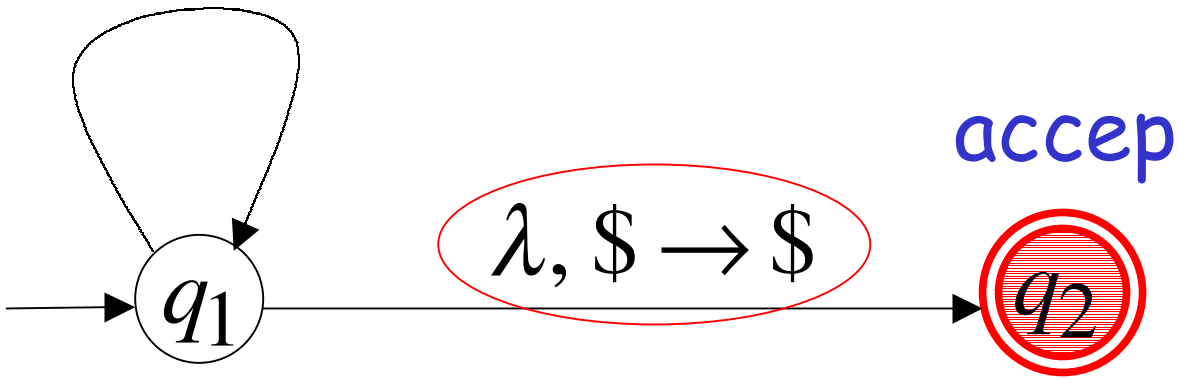

accept

Formalities for NPDAs

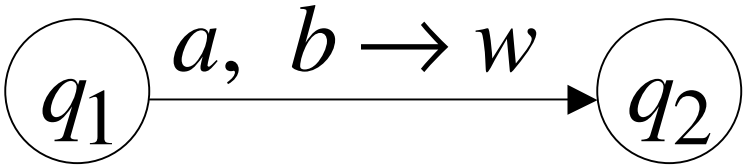

Transition function:

$$\delta(q_1, a, b) = \{(q_2, w)\}$$

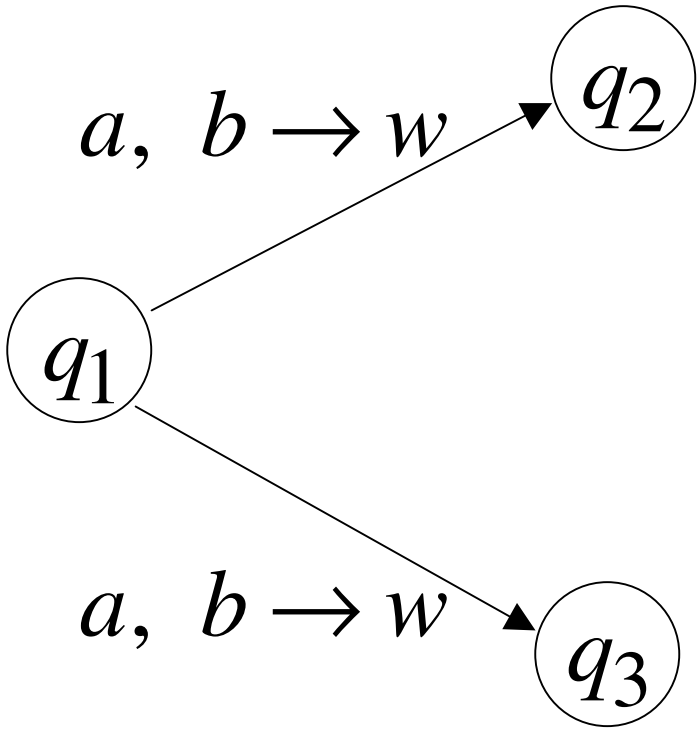

Transition function:

$$\delta(q_1, a, b) = \{(q_2, w),\ (q_3, w)\}$$

Formal Definition

Non-Deterministic Pushdown Automaton

NPDA

$$M = (Q, \Sigma, \Gamma, \delta, z, F)$$

States

Input alphabet

Stack alphabet

Transition function

Stack start symbol

Final states

Instantaneous Description

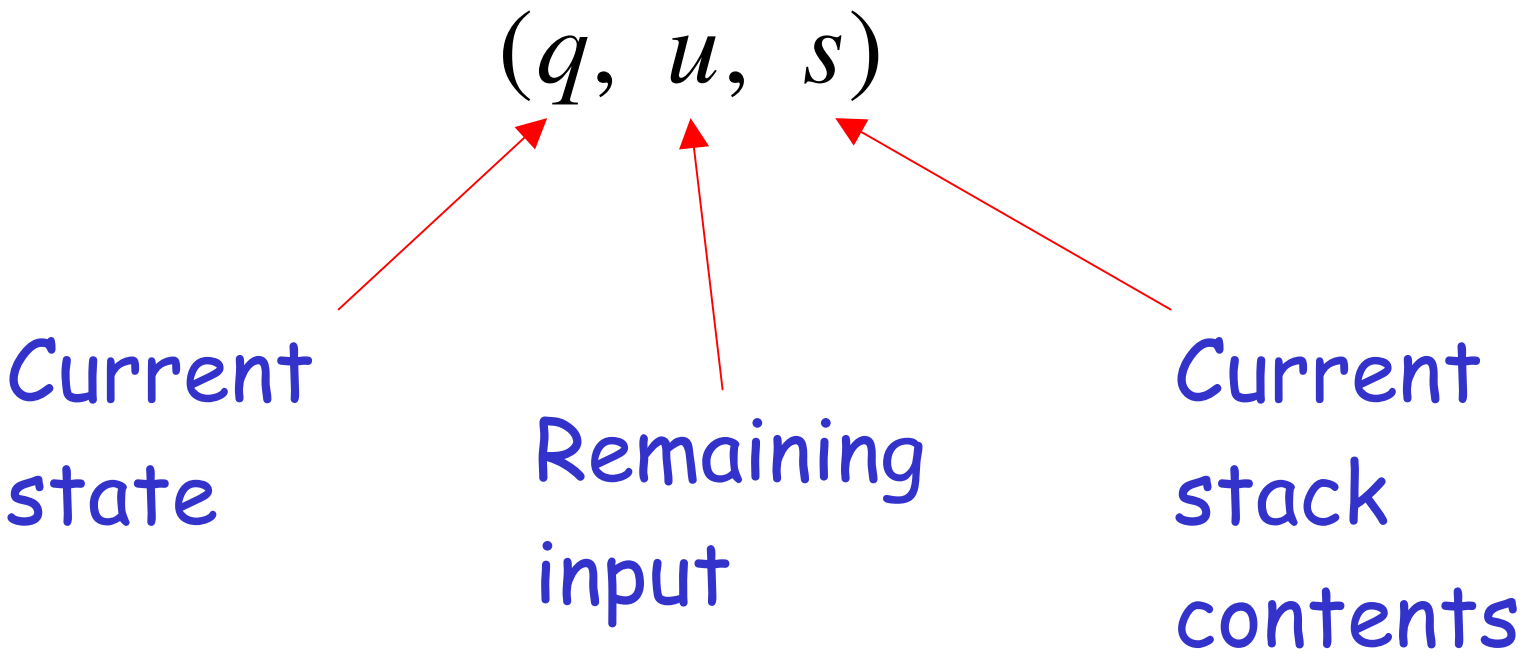

Example: **Instantaneous Description**

$$(q_1, bbb, aaa\$)$$

Time 4:

Input

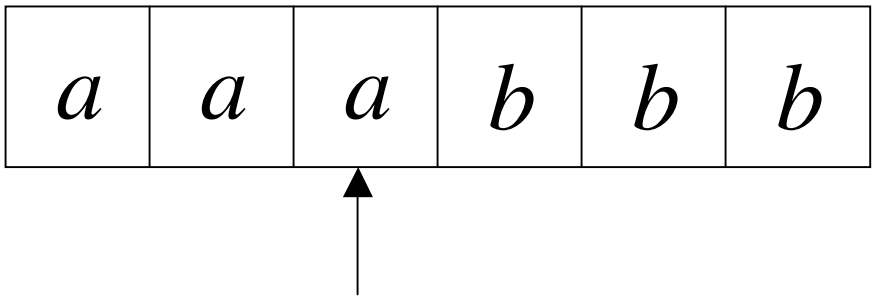

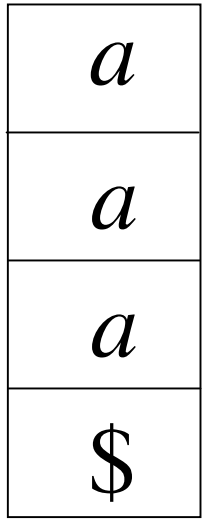

Stack

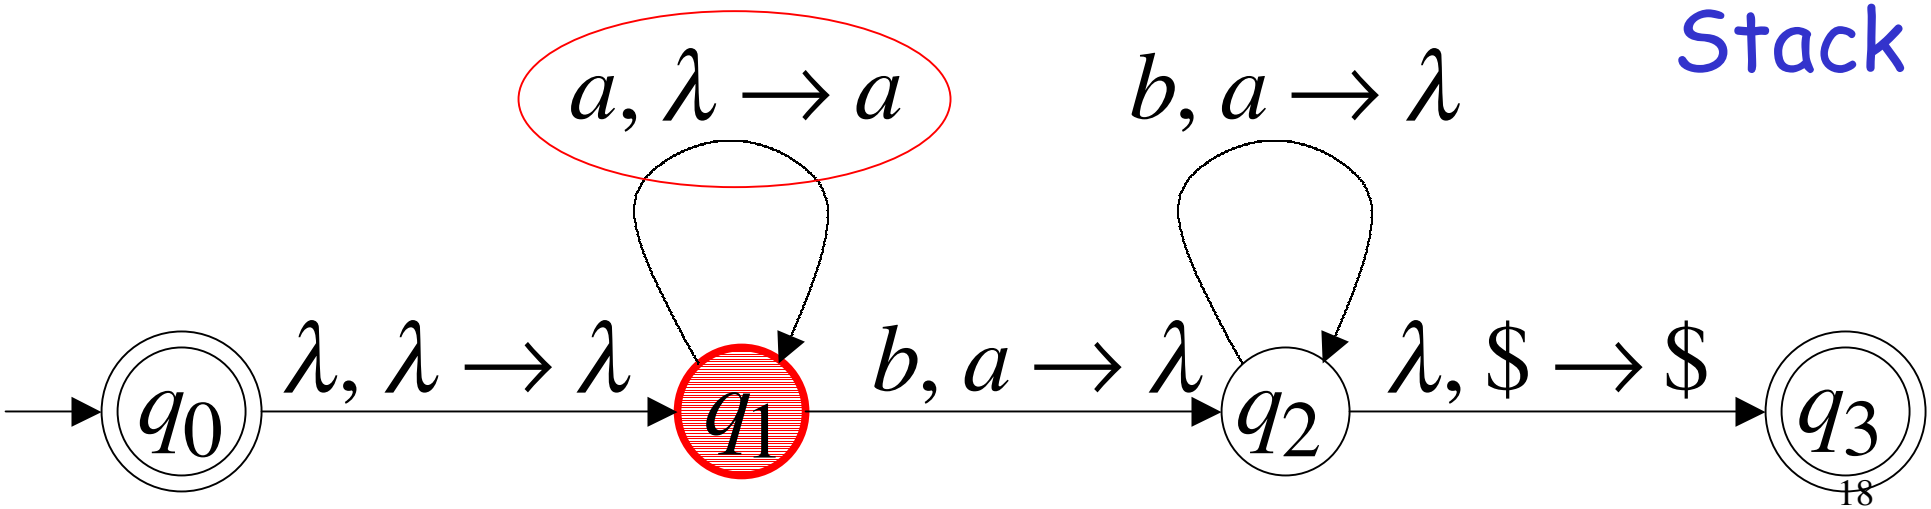

Example: **Instantaneous Description**

$$(q_2, bb, aa\$)$$

Time 5:

Input

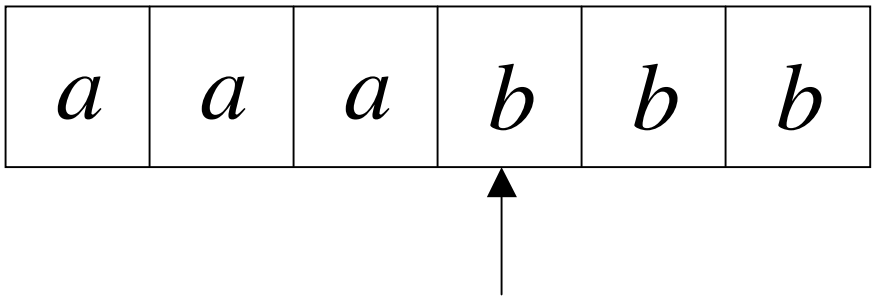

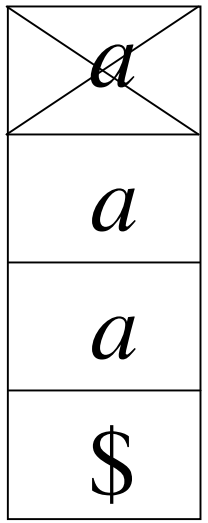

Stack

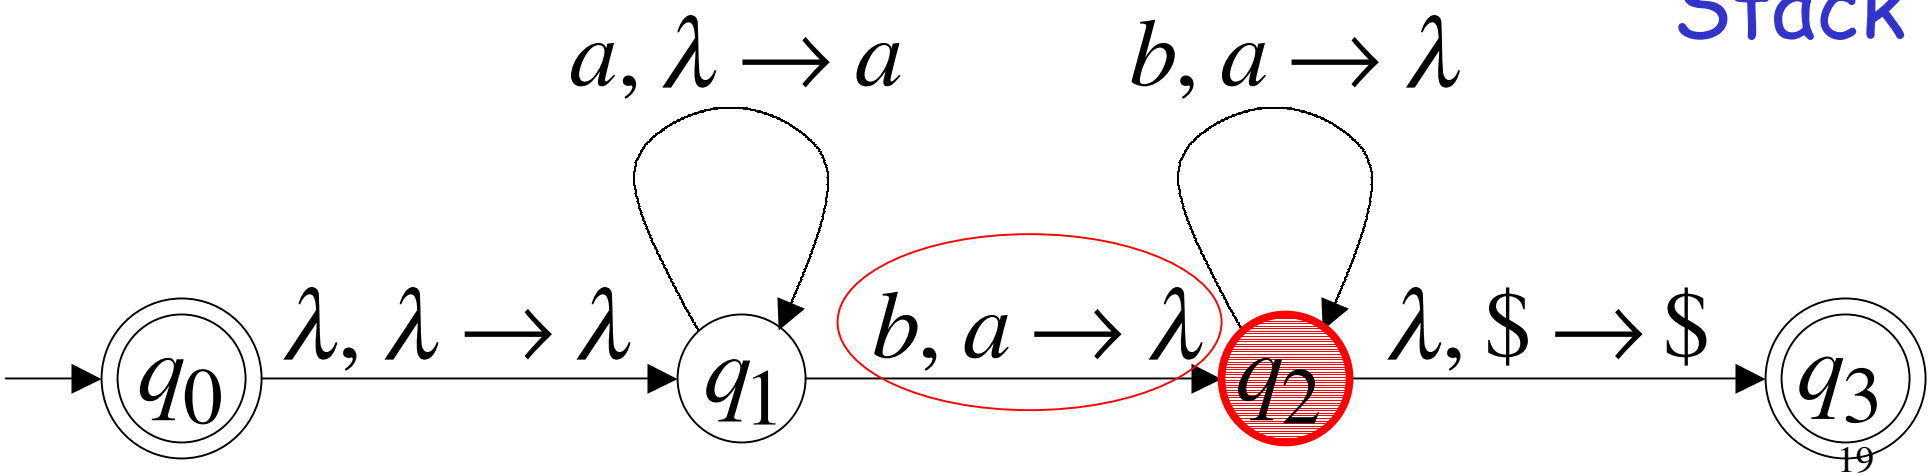

We write:

$$(q_1, bbb, aaa\$) \succ (q_2, bb, aa\$)$$

Time 4 Time 5

A computation:

$$(q_0, aaabbb, \$) \succ (q_1, aaabbb, \$) \succ$$

$$(q_1, aabbb, a\$) \succ (q_1, abbb, aa\$) \succ (q_1, bbb, aaa\$) \succ$$

$$(q_2, bb, aa\$) \succ (q_2, b, a\$) \succ (q_2, \lambda, \$) \succ (q_3, \lambda, \$)$$

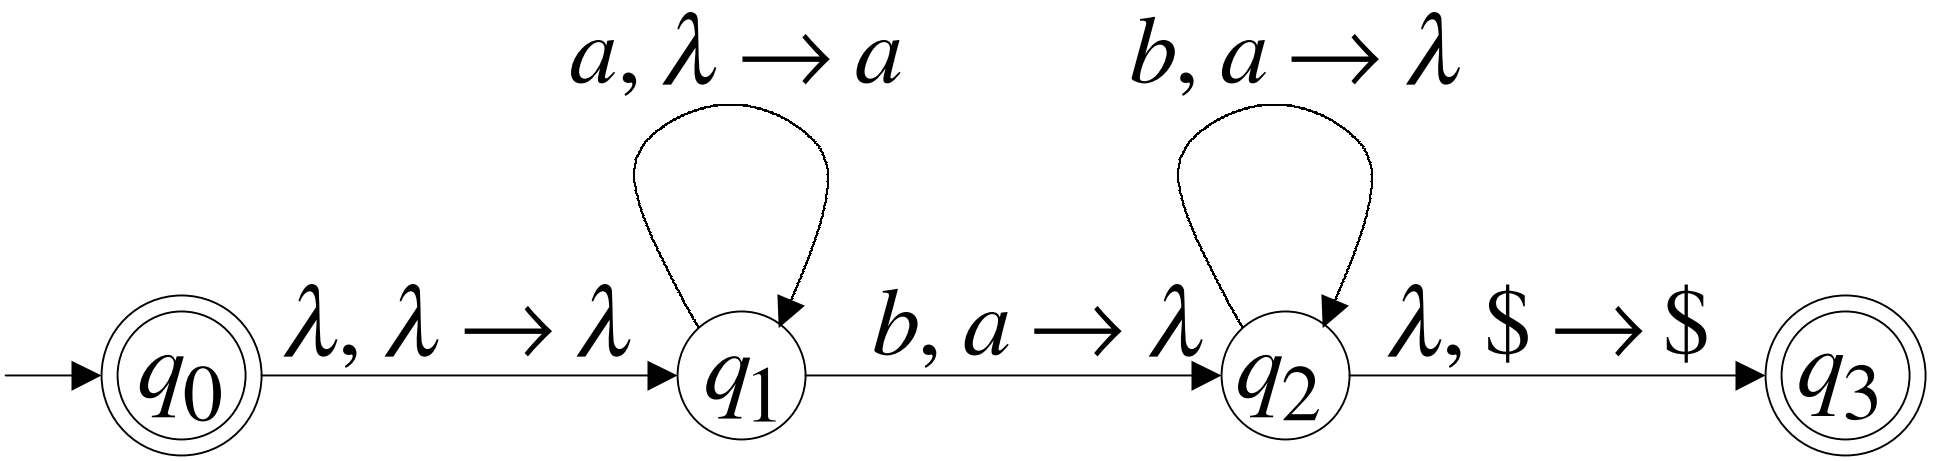

$$(q_0, aaabbb, \$) \succ (q_1, aaabbb, \$) \succ$$

$$(q_1, aabbb, a\$) \succ (q_1, abbb, aa\$) \succ (q_1, bbb, aaa\$) \succ$$

$$(q_2, bb, aa\$) \succ (q_2, b, a\$) \succ (q_2, \lambda, \$) \succ (q_3, \lambda, \$)$$

For convenience we write:

$$(q_0, aaabbb, \$) \overset{*}{\succ} (q_3, \lambda, \$)$$

Formal Definition

Language of NPDA M :

$$L(M) = \{w: \ (q_0, w, s) \overset{*}{\succ} (q_f, \lambda, s')\}$$

Initial state

Final state

Example:

$$(q_0, aaabbb, \$) \overset{*}{\succ} (q_3, \lambda, \$)$$

$$aaabbb \in L(M)$$

NPDA M :

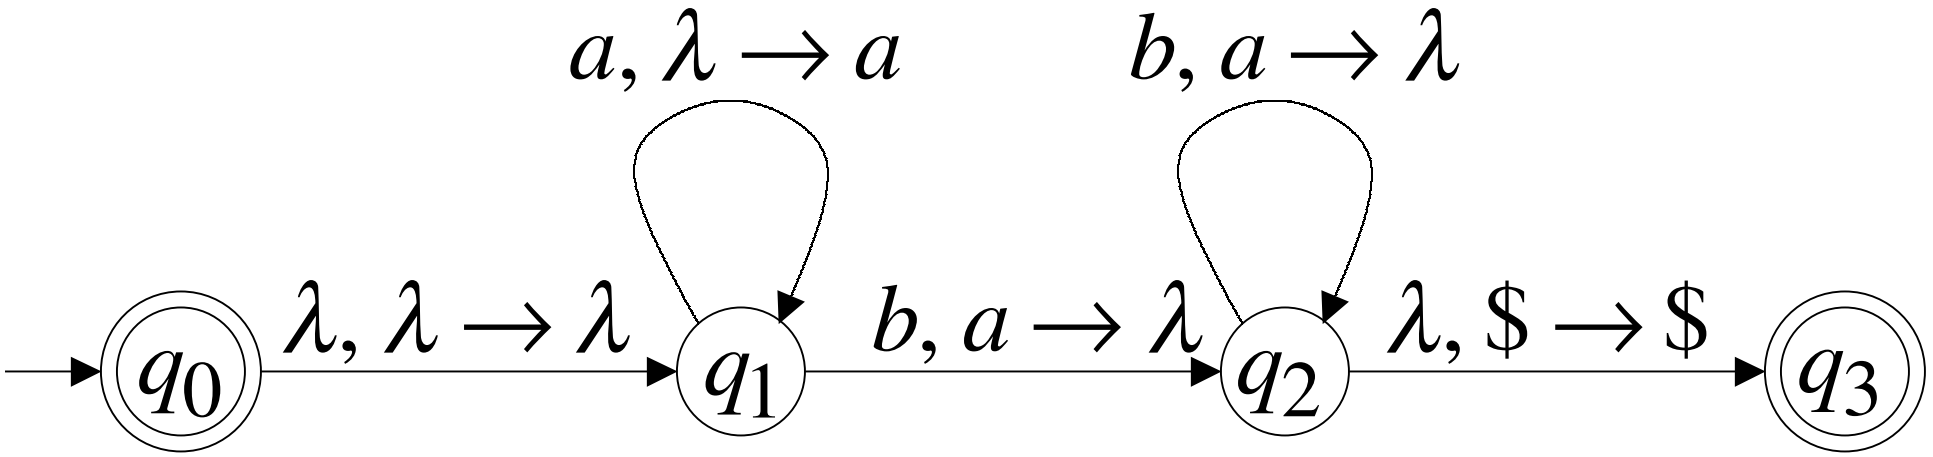

$$(q_0, a^n b^n, \$) \overset{*}{\succ} (q_3, \lambda, \$)$$

$$\Downarrow$$

$$a^n b^n \in L(M)$$

NPDA M :

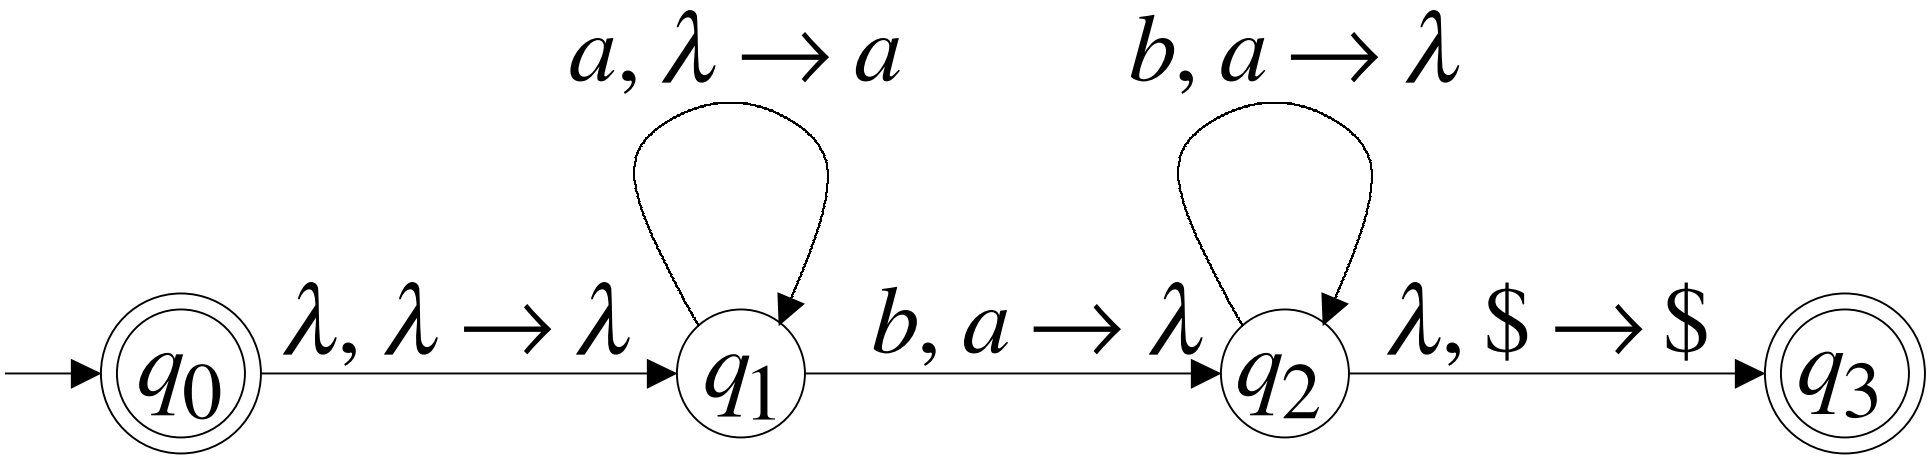

Therefore: $L(M) = \{a^n b^n : n \geq 0\}$

NPDA M :

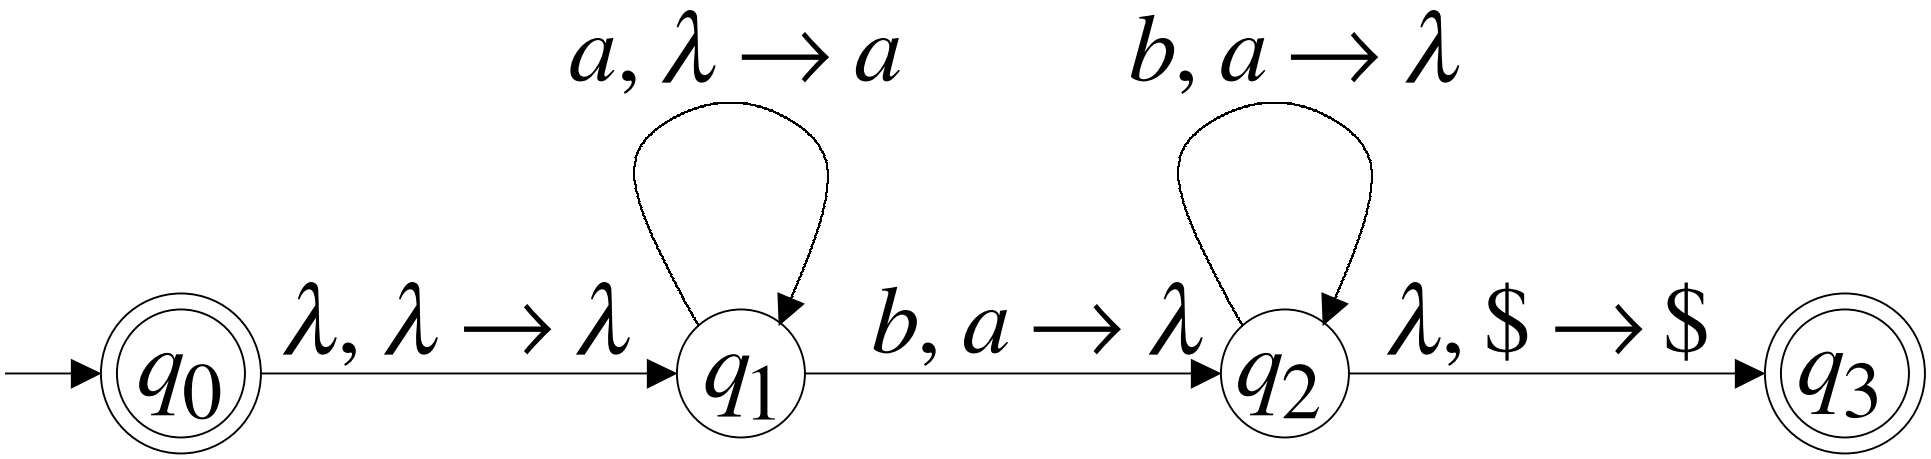

NPDAs Accept Context-Free Languages

Theorem:

$$\left\{\begin{array}{c}\text{Context-Free}\\ \text{Languages}\\ \text{(Grammars)}\end{array}\right\} = \left\{\begin{array}{c}\text{Languages}\\ \text{Accepted by}\\ \text{NPDAs}\end{array}\right\}$$

Proof - Step 1:

$$\left\{\begin{array}{c}\text{Context-Free}\\ \text{Languages}\\ \text{(Grammars)}\end{array}\right\} \subseteq \left\{\begin{array}{c}\text{Languages}\\ \text{Accepted by}\\ \text{NPDAs}\end{array}\right\}$$

Convert any context-free grammar G

to a NPDA M with: $L(G) = L(M)$

Proof - Step 2:

$$\left\{\begin{array}{c}\text{Context-Free}\\ \text{Languages}\\ \text{(Grammars)}\end{array}\right\} \supseteq \left\{\begin{array}{c}\text{Languages}\\ \text{Accepted by}\\ \text{NPDAs}\end{array}\right\}$$

Convert any NPDA M to a context-free grammar G with: $L(G) = L(M)$

Converting
Context-Free Grammars
to
NPDAs

An example grammar:

$$S \to aSTb$$

$$S \to b$$

$$T \to Ta$$

$$T \to \lambda$$

What is the equivalent NPDA?

Grammar:

$S \to aSTb$

$S \to b$

$T \to Ta$

$T \to \lambda$

NPDA:

$\lambda, S \to aSTb$

$\lambda, S \to b$

$\lambda, T \to Ta$ $\quad a, a \to \lambda$

$\lambda, T \to \lambda$ $\quad b, b \to \lambda$

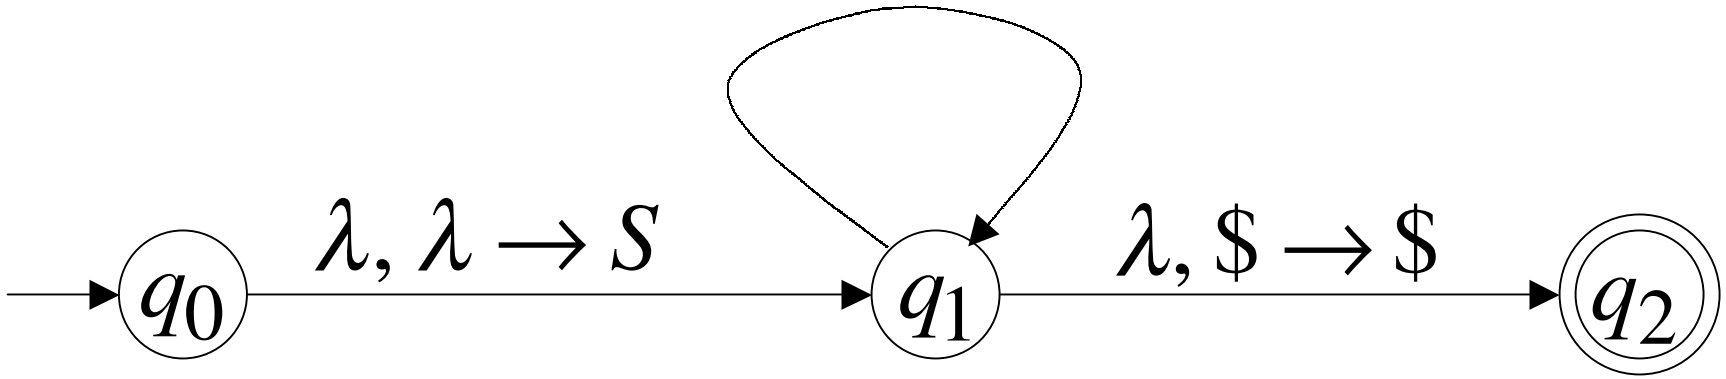

The NPDA simulates
leftmost derivations of the grammar

L(Grammar) = L(NPDA)

Grammar:

$$S \to aSTb$$

$$S \to b$$

$$T \to Ta$$

$$T \to \lambda$$

A leftmost derivation:

$$S \Rightarrow aSTb \Rightarrow abTb \Rightarrow abTab \Rightarrow abab$$

NPDA execution: Time 0

Input

a	b	a	b

$\lambda, S \to aSTb$

$\lambda, S \to b$

$\lambda, T \to Ta$ $\quad a, a \to \lambda$

$\lambda, T \to \lambda$ $\quad b, b \to \lambda$

$

Stack

current state

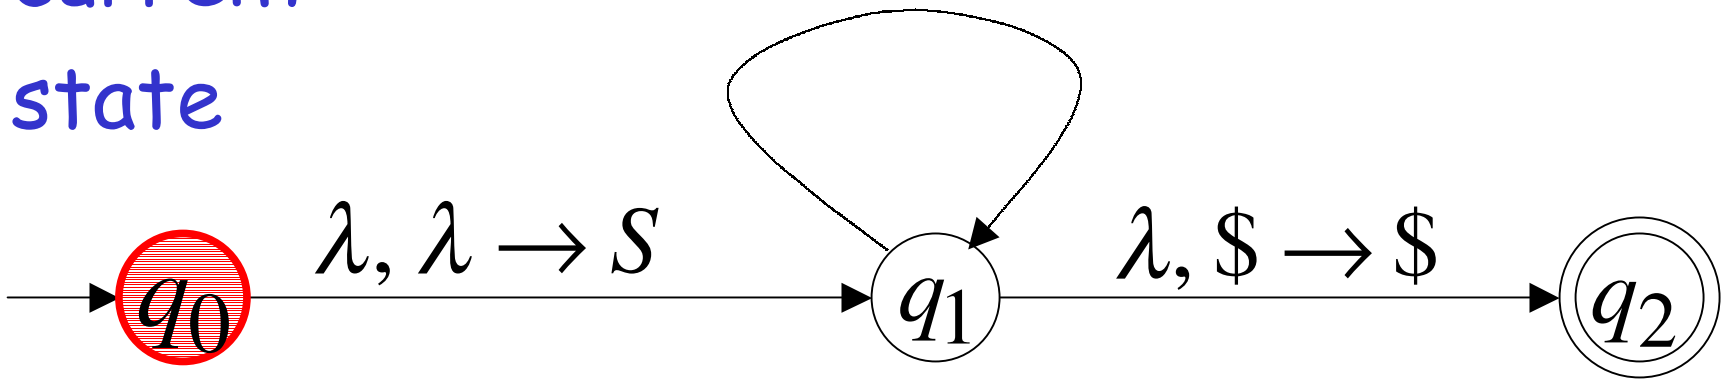

Time 1

Input

a	b	a	b

S
\$

Stack

$\lambda, S \rightarrow aSTb$

$\lambda, S \rightarrow b$

$\lambda, T \rightarrow Ta$ $\quad a, a \rightarrow \lambda$

$\lambda, T \rightarrow \lambda$ $\quad b, b \rightarrow \lambda$

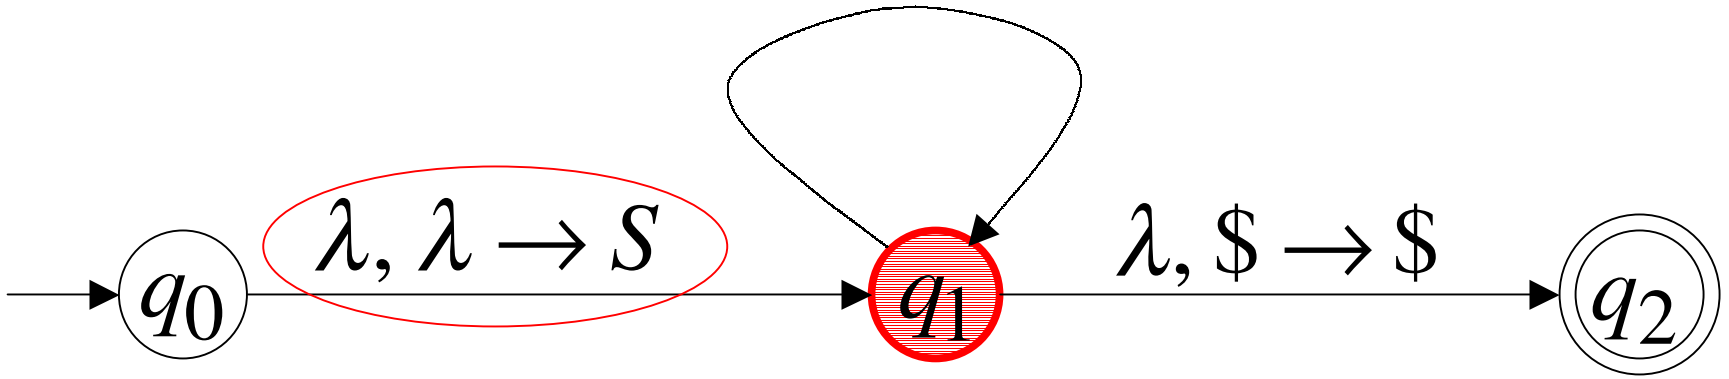

Time 2

Input

a	b	a	b

a
S
T
b
\$

Stack

$\lambda, S \to aSTb$

$\lambda, S \to b$

$\lambda, T \to Ta$ $\quad a, a \to \lambda$

$\lambda, T \to \lambda$ $\quad b, b \to \lambda$

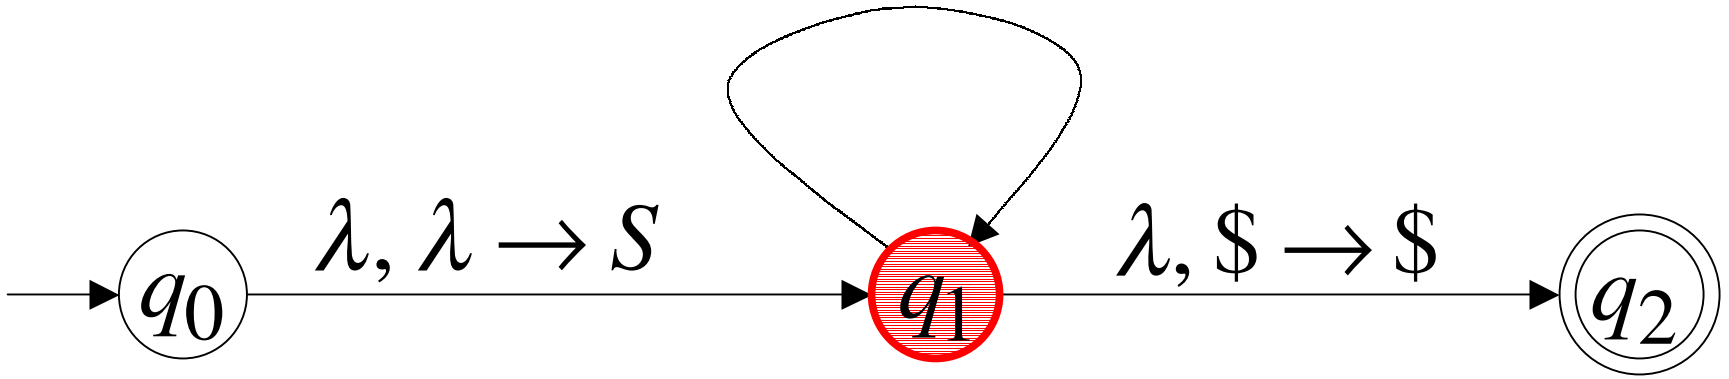

Time 3

Input

a	b	a	b

~~a~~
S
T
b
\$

Stack

$\lambda, S \to aSTb$

$\lambda, S \to b$

$\lambda, T \to Ta$

$\lambda, T \to \lambda$

$a, a \to \lambda$

$b, b \to \lambda$

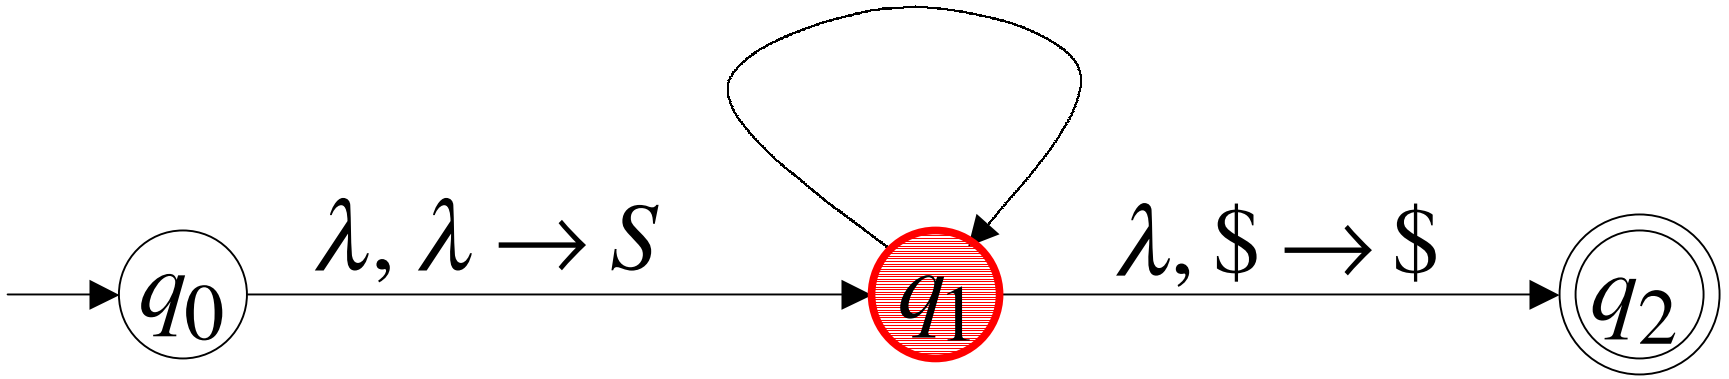

Time 4

Input

a	b	a	b

b
T
b
\$

Stack

$\lambda, S \to aSTb$

$\lambda, S \to b$

$\lambda, T \to Ta$ $\quad a, a \to \lambda$

$\lambda, T \to \lambda$ $\quad b, b \to \lambda$

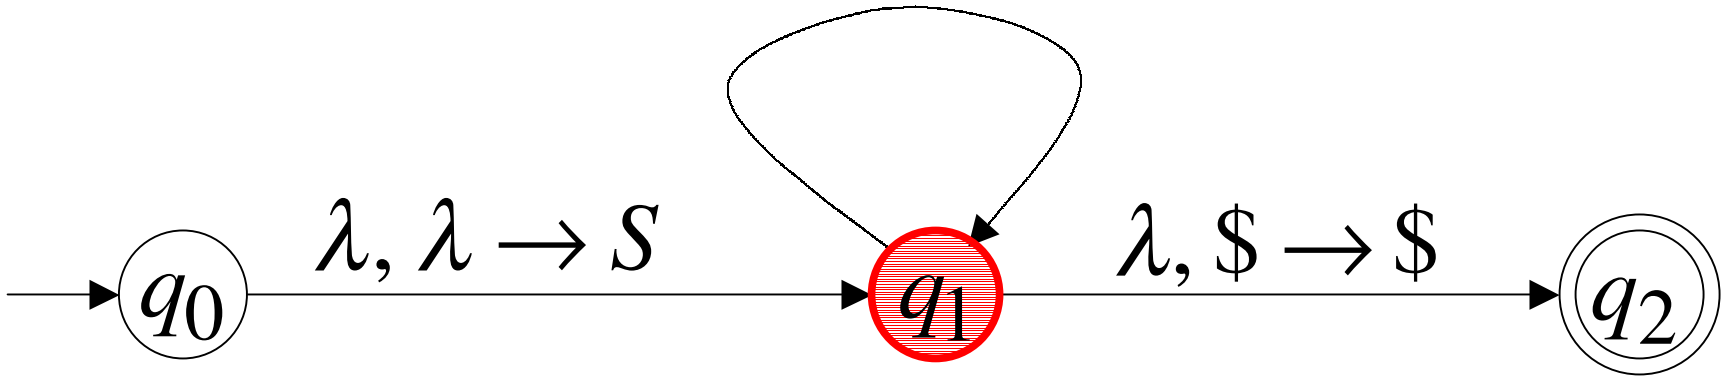

Time 5

Input

a	b	a	b

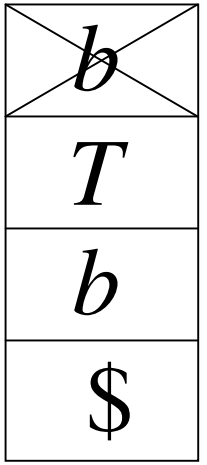

Stack

$\lambda, S \to aSTb$

$\lambda, S \to b$

$\lambda, T \to Ta$ $\quad a, a \to \lambda$

$\lambda, T \to \lambda$ $\quad b, b \to \lambda$

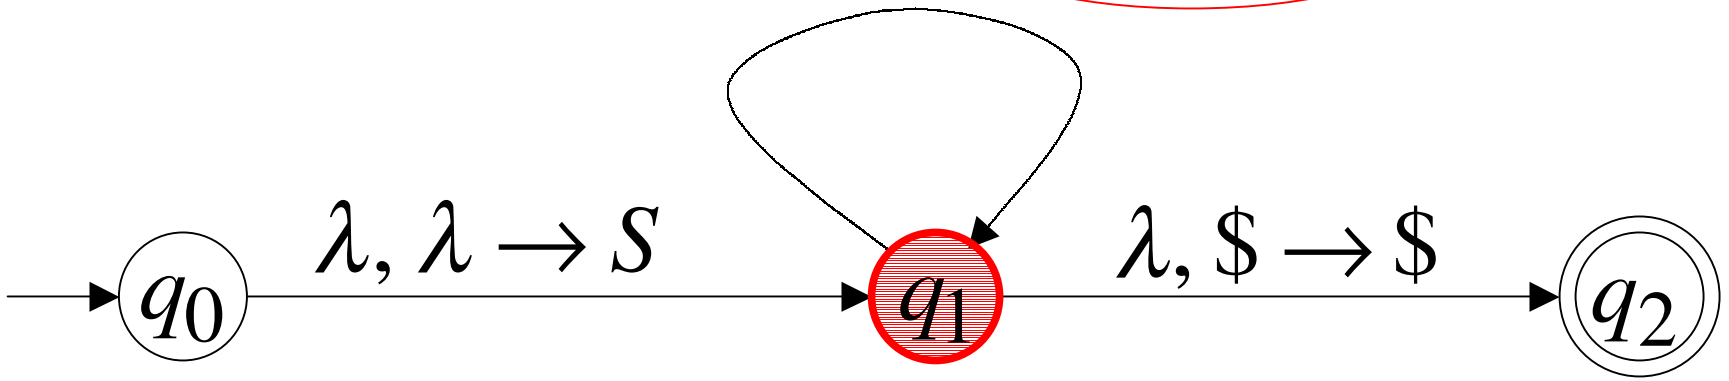

Time 6

Input

a	b	a	b

T
a
b
\$

Stack

$\lambda, S \rightarrow aSTb$

$\lambda, S \rightarrow b$

$\lambda, T \rightarrow Ta$ $\quad a, a \rightarrow \lambda$

$\lambda, T \rightarrow \lambda$ $\quad b, b \rightarrow \lambda$

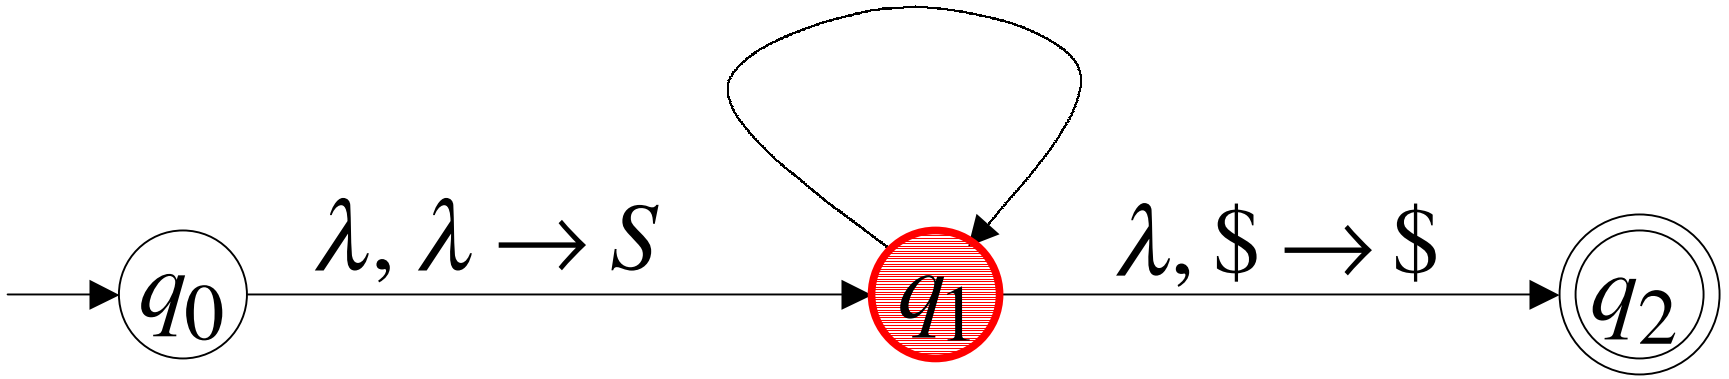

Time 7

Input

a	b	a	b

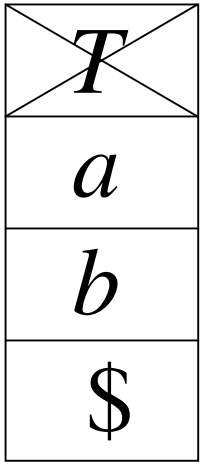

Stack

$\lambda, S \to aSTb$

$\lambda, S \to b$

$\lambda, T \to Ta$ $\quad a, a \to \lambda$

$\lambda, T \to \lambda$ $\quad b, b \to \lambda$

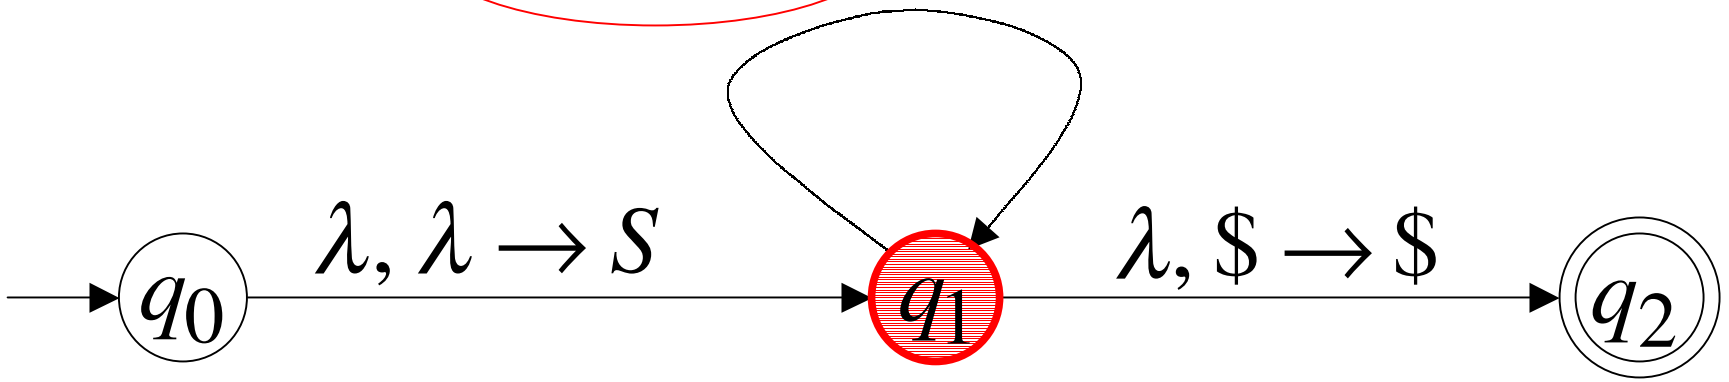

Time 8

Input

a	b	a	b

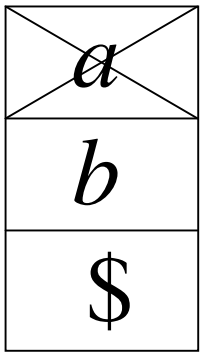

Stack

$\lambda, S \rightarrow aSTb$

$\lambda, S \rightarrow b$

$\lambda, T \rightarrow Ta$

$\lambda, T \rightarrow \lambda$

$a, a \rightarrow \lambda$

$b, b \rightarrow \lambda$

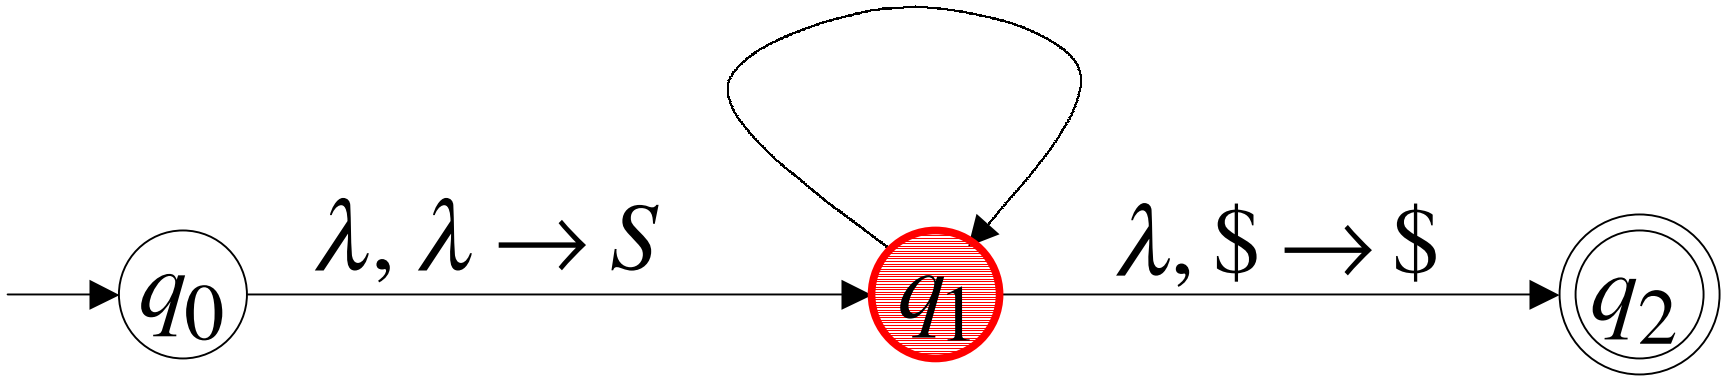

Time 9

Input

a	b	a	b



Stack

$\lambda, S \to aSTb$

$\lambda, S \to b$

$\lambda, T \to Ta$ $\quad a, a \to \lambda$

$\lambda, T \to \lambda$ $\quad b, b \to \lambda$

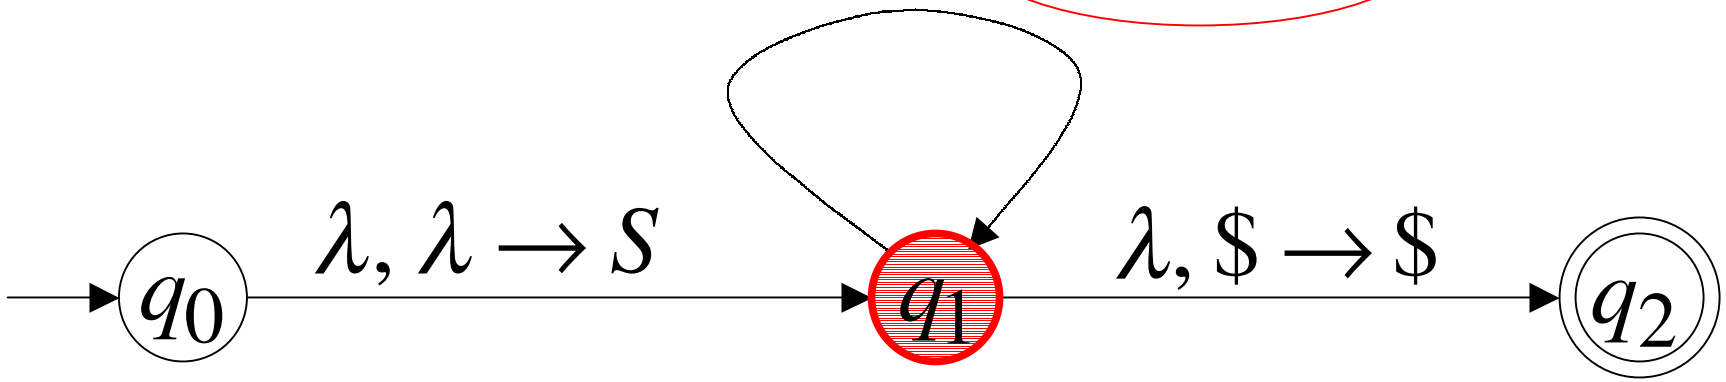

Time 10

Input

a	b	a	b

$\lambda, S \to aSTb$

$\lambda, S \to b$

$\lambda, T \to Ta$ $\quad a, a \to \lambda$

$\lambda, T \to \lambda$ $\quad b, b \to \lambda$

$

Stack

accept

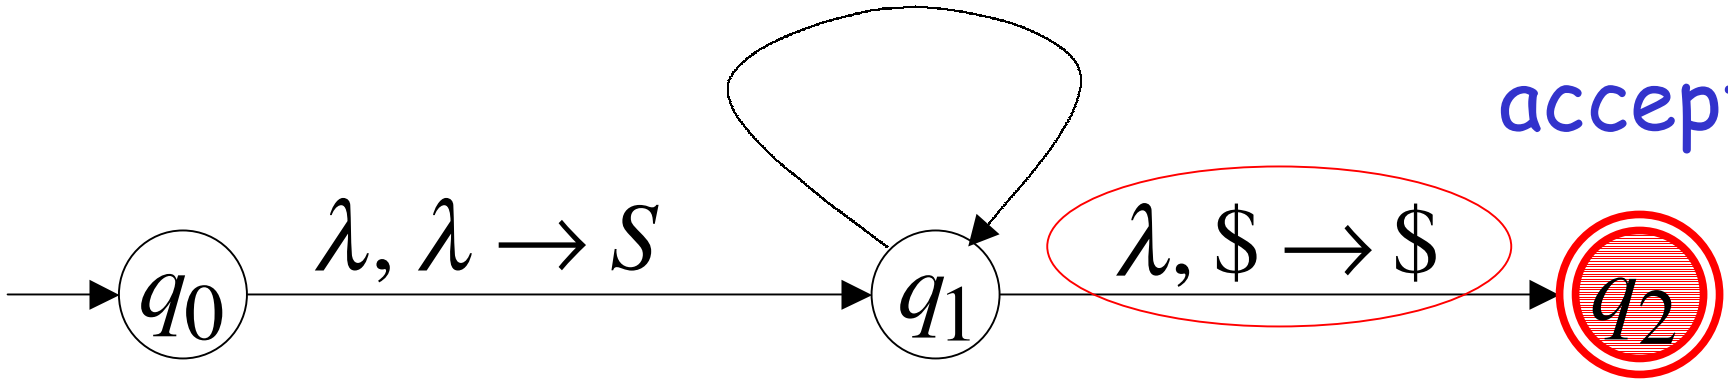

In general:

Given any grammar G

We can construct a NPDA M

With $L(G) = L(M)$

Constructing NPDA M from grammar G:

For any production $A \to w$

For any terminal a

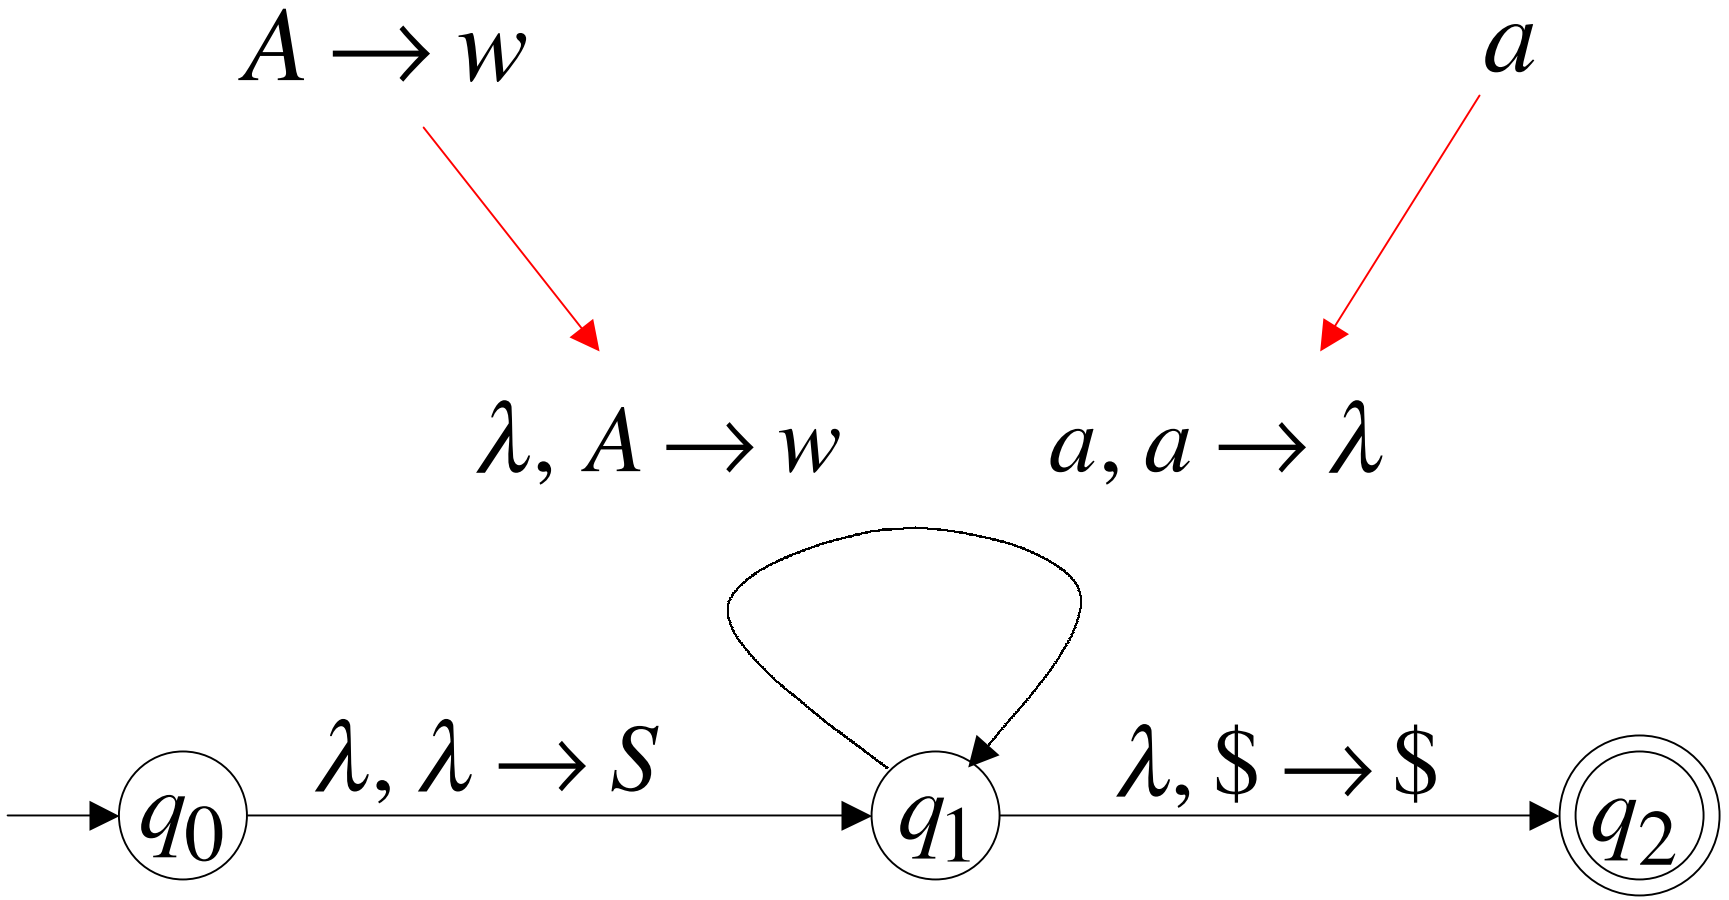

Grammar G generates string w

if and only if

NPDA M accepts w



$$L(G) = L(M)$$

Therefore:

For any context-free language
there is an NPDA
that accepts the same language

Converting
NPDAs
to
Context-Free Grammars

For any NPDA M

we will construct

a context-free grammar G with

$$L(M) = L(G)$$

Intuition: The grammar simulates the machine

A derivation in Grammar G :

$$S \Rightarrow \cdots \Rightarrow \underbrace{abc\ldots ABC\ldots} \Rightarrow \ldots \Rightarrow abc\ldots$$

Current configuration in NPDA M

A derivation in Grammar G :

terminals variables

$$S \Rightarrow \cdots \Rightarrow abc\ldots ABC\ldots \Rightarrow \ldots \Rightarrow abc\ldots$$

Input processed Stack contents

in NPDA M

Some Necessary Modifications

First, we modify the NPDA:

- It has a single final state q_f
- It empties the stack
  when it accepts the input

Original NPDA

Empty Stack

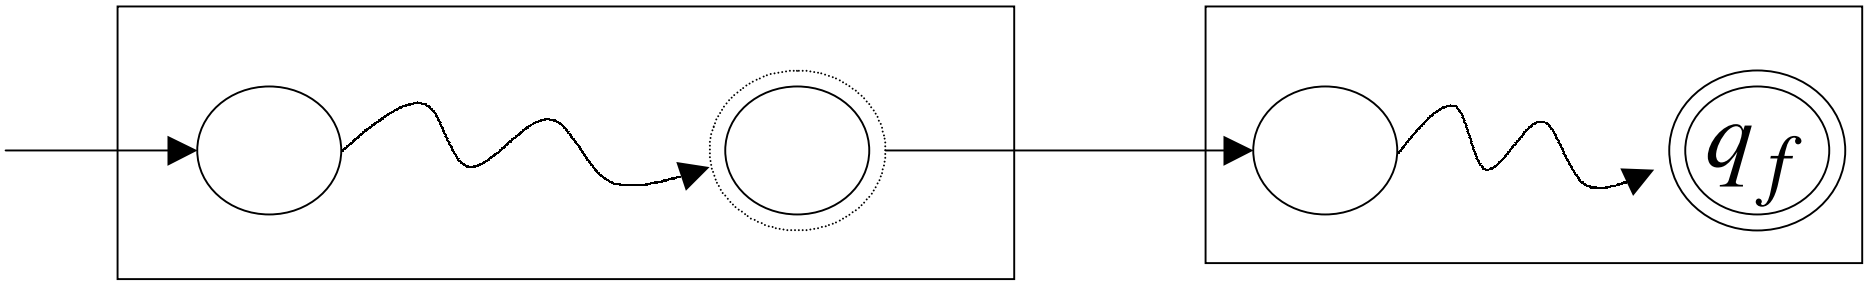

Second, we modify the NPDA transitions:

all transitions will have form

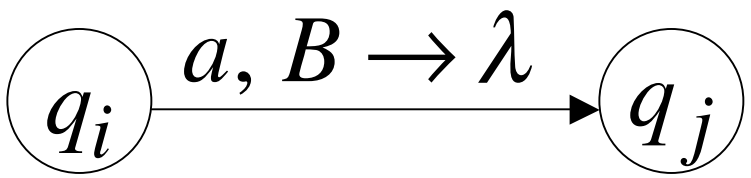

or

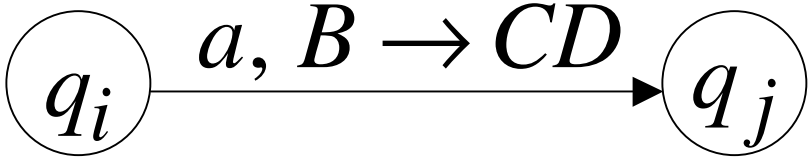

B, C, D : stack symbols

Example of a NPDA in correct form:

$$L(M) = \{w: \quad n_a = n_b\}$$

$\$$: initial stack symbol

$$a, \$ \to 0\$ \qquad b, \$ \to 1\$$$
$$a, 0 \to 00 \qquad b, 1 \to 11$$
$$a, 1 \to \lambda \qquad b, 0 \to \lambda$$

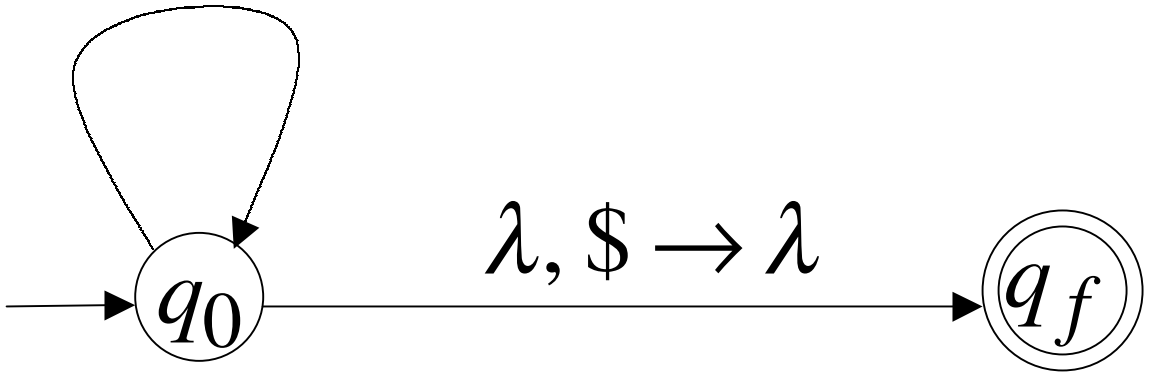

The Grammar Construction

In grammar G:

Stack symbol

Variables: $(q_i B q_j)$

states

Terminals:

Input symbols of NPDA

For each transition

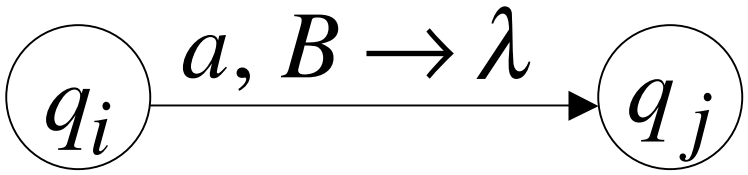

We add production $(q_i B q_j) \to a$

For each transition

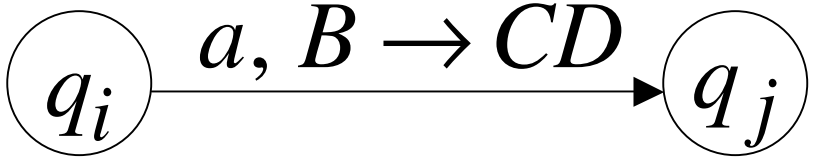

We add production $(q_i B q_k) \to a(q_j C q_l)(q_l D q_k)$

For all states q_k, q_l

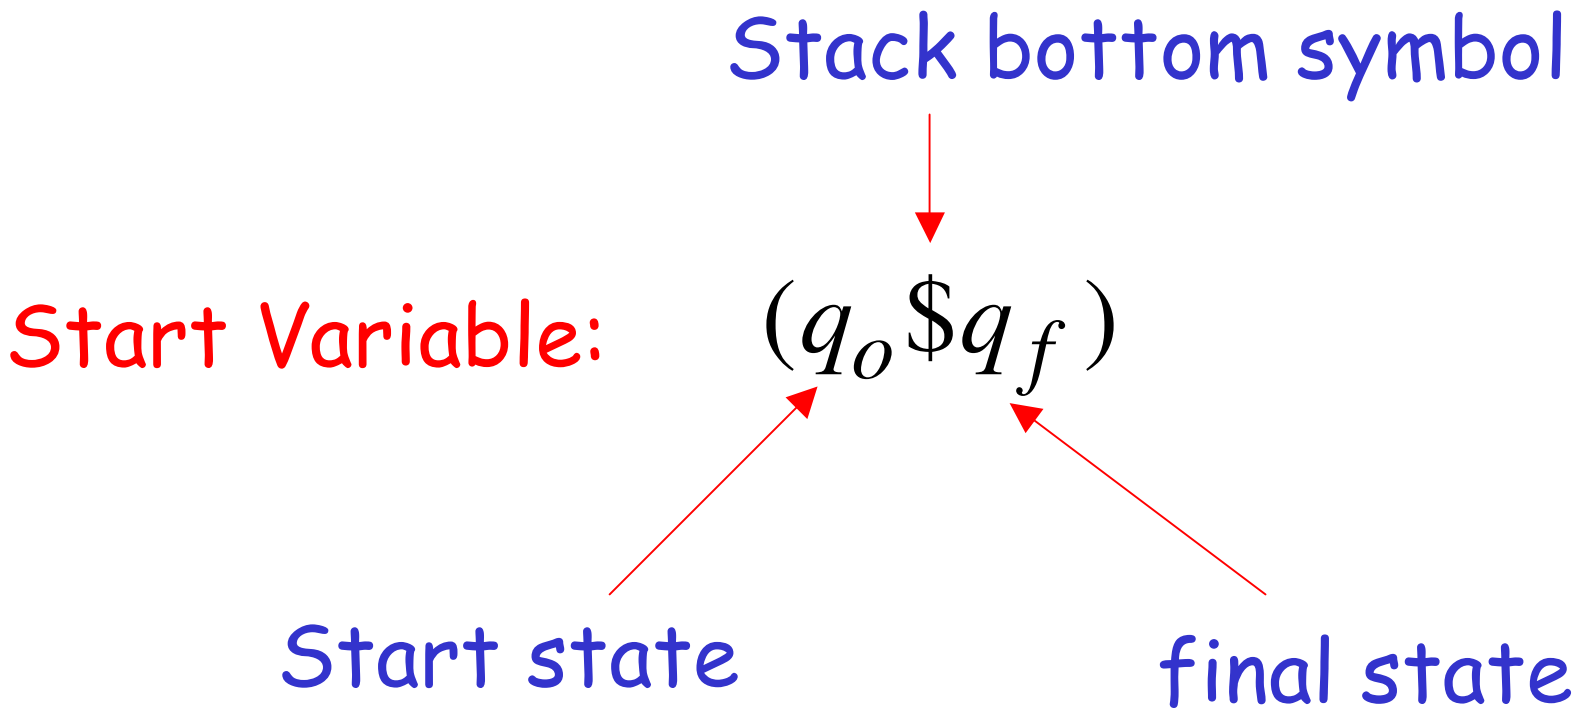
Stack bottom symbol
Start Variable:
$(q_o \$ q_f)$
Start state
final state

Example:

$$a, \$ \rightarrow 0\$ \qquad b, \$ \rightarrow 1\$$$

$$a, 0 \rightarrow 00 \qquad b, 1 \rightarrow 11$$

$$a, 1 \rightarrow \lambda \qquad b, 0 \rightarrow \lambda$$

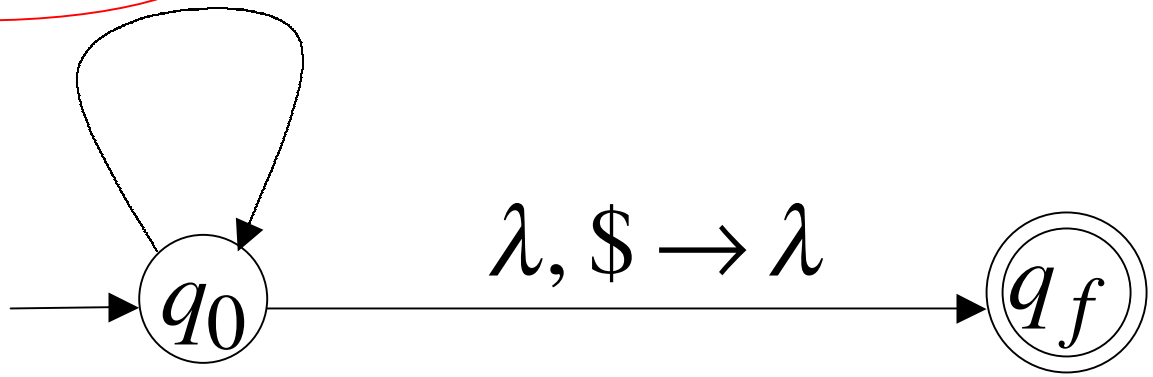

Grammar production: $(q_0 1 q_0) \rightarrow a$

Example:

$a, \$ \rightarrow 0\$$ $b, \$ \rightarrow 1\$$

$a, 0 \rightarrow 00$ $b, 1 \rightarrow 11$

$a, 1 \rightarrow \lambda$ $b, 0 \rightarrow \lambda$

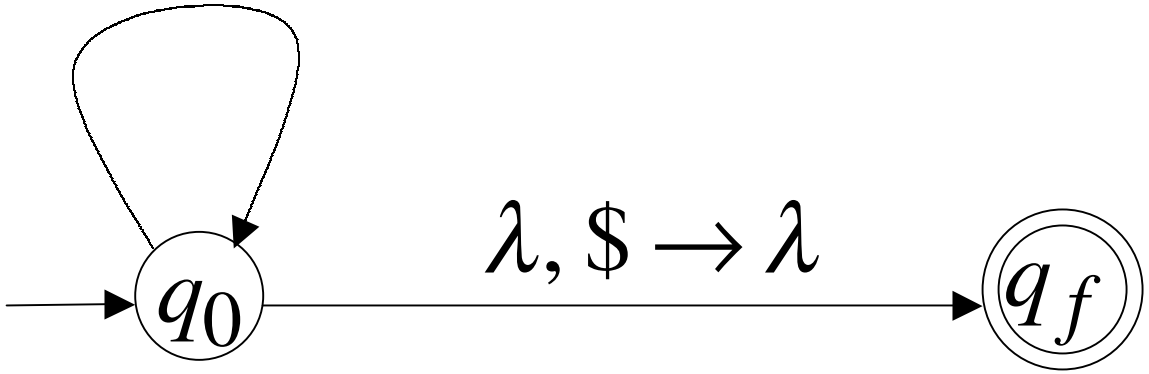

Grammar productions:

$$(q_0\$q_0) \rightarrow b(q_0 1 q_0)(q_0\$q_0) \mid b(q_0 1 q_f)(q_f\$q_0)$$

$$(q_0\$q_f) \rightarrow b(q_0 1 q_0)(q_0\$q_f) \mid b(q_0 1 q_f)(q_f\$q_f)$$

Example:

$$a, \$ \rightarrow 0\$ \qquad b, \$ \rightarrow 1\$$$

$$a, 0 \rightarrow 00 \qquad b, 1 \rightarrow 11$$

$$a, 1 \rightarrow \lambda \qquad b, 0 \rightarrow \lambda$$

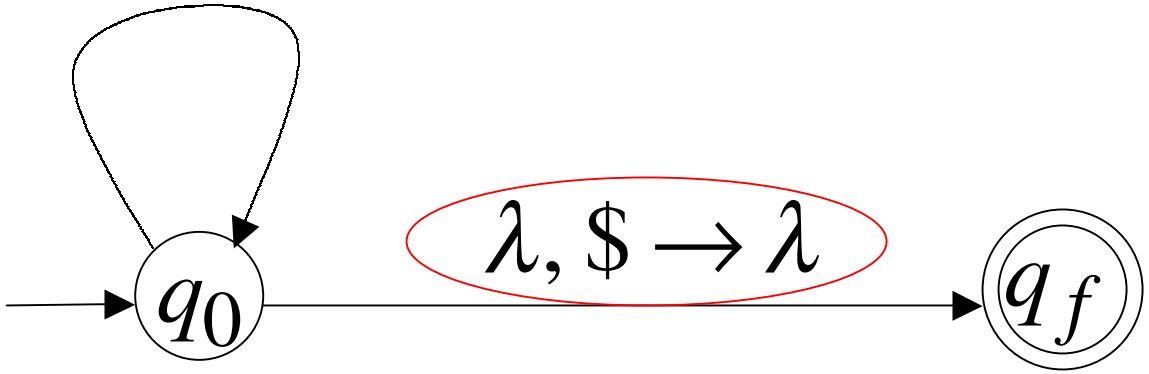

Grammar production: $(q_0 \$ q_f) \rightarrow \lambda$

Resulting Grammar:

$(q_0\$q_f)$: start variable

$$(q_0\$q_0) \to b(q_0 1 q_0)(q_0\$q_0) \mid b(q_0 1 q_f)(q_f\$q_0)$$

$$(q_0\$q_f) \to b(q_0 1 q_0)(q_0\$q_f) \mid b(q_0 1 q_f)(q_f\$q_f)$$

$$(q_0 1 q_0) \to b(q_0 1 q_0)(q_0 1 q_0) \mid b(q_0 1 q_f)(q_f 1 q_0)$$

$$(q_0 1 q_f) \to b(q_0 1 q_0)(q_0 1 q_f) \mid b(q_0 1 q_f)(q_f 1 q_f)$$

$$(q_0\$q_0) \to a(q_0 0 q_0)(q_0\$q_0) \mid a(q_0 0 q_f)(q_f\$q_0)$$

$$(q_0\$q_f) \to a(q_0 0 q_0)(q_0\$q_f) \mid a(q_0 0 q_f)(q_f\$q_f)$$

$$(q_0 0 q_0) \rightarrow a(q_0 0 q_0)(q_0 0 q_0) \,|\, a(q_0 0 q_f)(q_f 0 q_0)$$

$$(q_0 0 q_f) \rightarrow a(q_0 0 q_0)(q_0 0 q_f) \,|\, a(q_0 0 q_f)(q_f 0 q_f)$$

$$(q_0 1 q_0) \rightarrow a$$

$$(q_0 0 q_0) \rightarrow b$$

$$(q_0 \$ q_f) \rightarrow \lambda$$

Derivation of string $abba$

$$(q_0\$q_f) \Rightarrow \quad a(q_0 0 q_0)(q_0\$q_f) \Rightarrow$$

$$ab(q_0\$q_f) \Rightarrow$$

$$abb(q_0 1 q_0)(q_0\$q_f) \Rightarrow$$

$$abba(q_0\$q_f) \Rightarrow \quad abba$$

In general, in Grammar:

$$(q_0 \$ q_f) \overset{*}{\Rightarrow} w$$

if and only if

w is accepted by the NPDA

Explanation:

By construction of Grammar:

$$(q_i A q_j) \overset{*}{\Rightarrow} w$$

if and only if

in the NPDA going from q_i to q_j
the stack doesn't change below A
and A is removed from stack