A Non Context-Free Language

(We will prove it at the next class)

Non Context-free languages

$$a^n b^n c^n$$

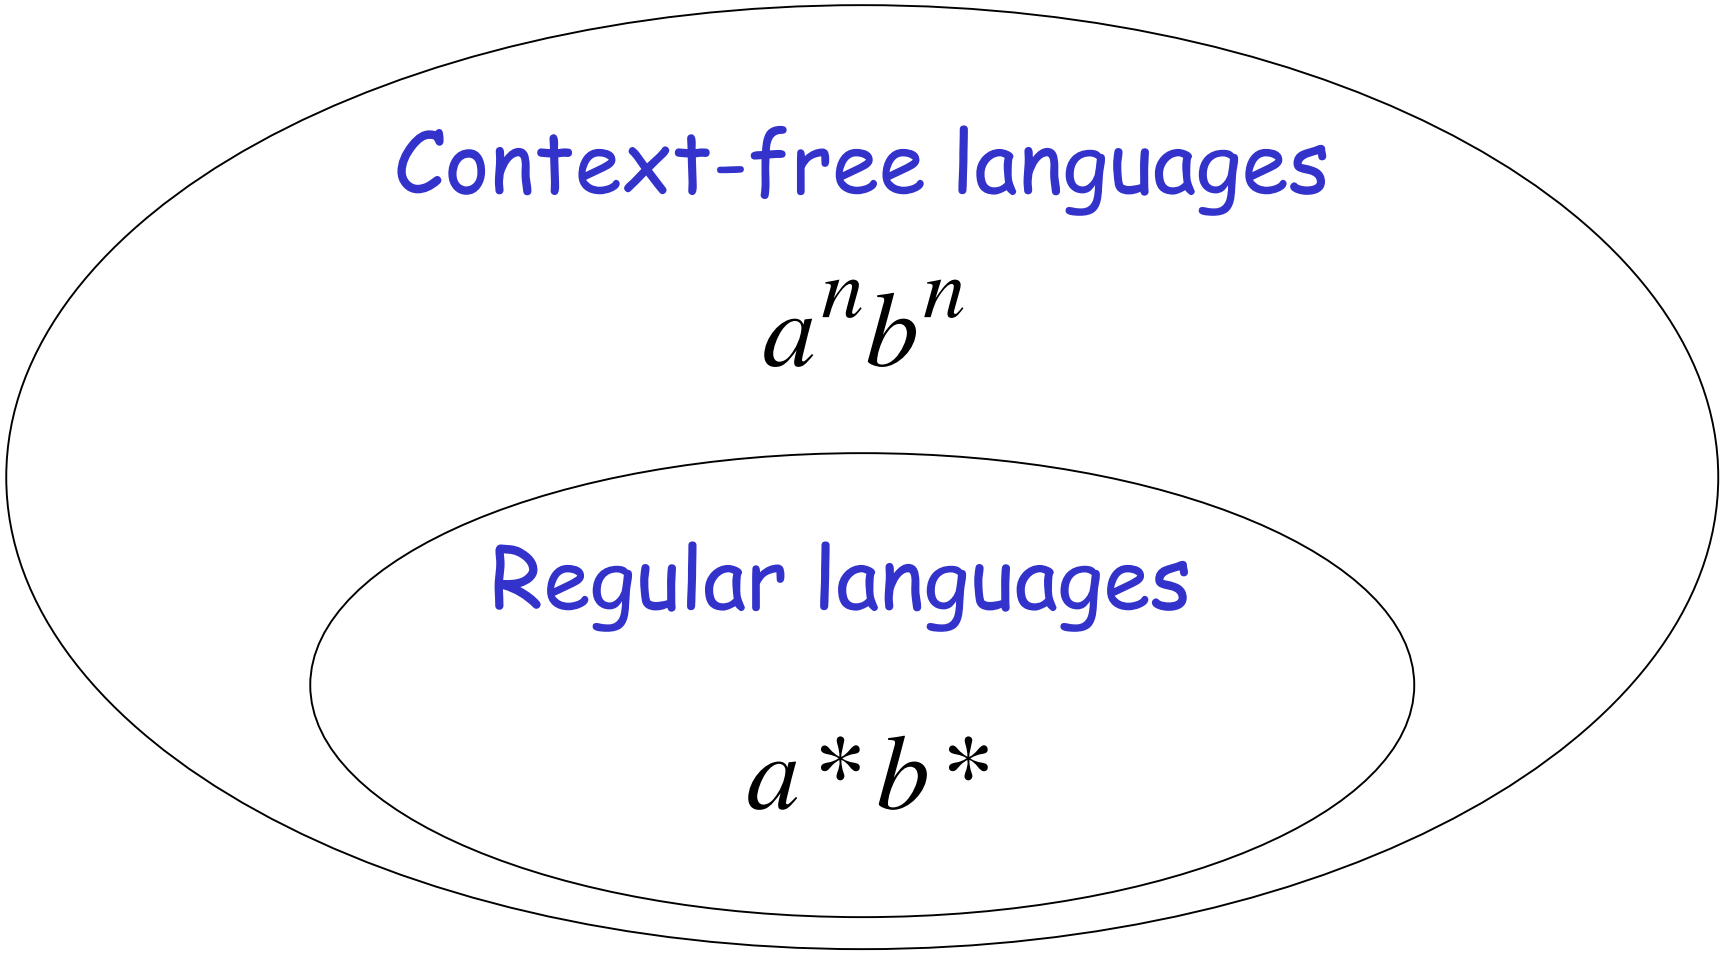

Deterministic PDAs

DPDAs

DPDAs

Allowed:

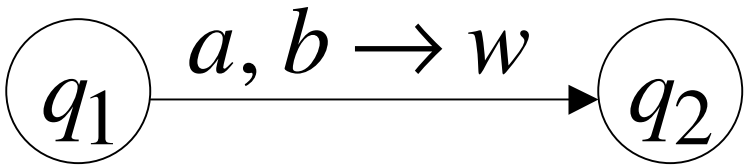

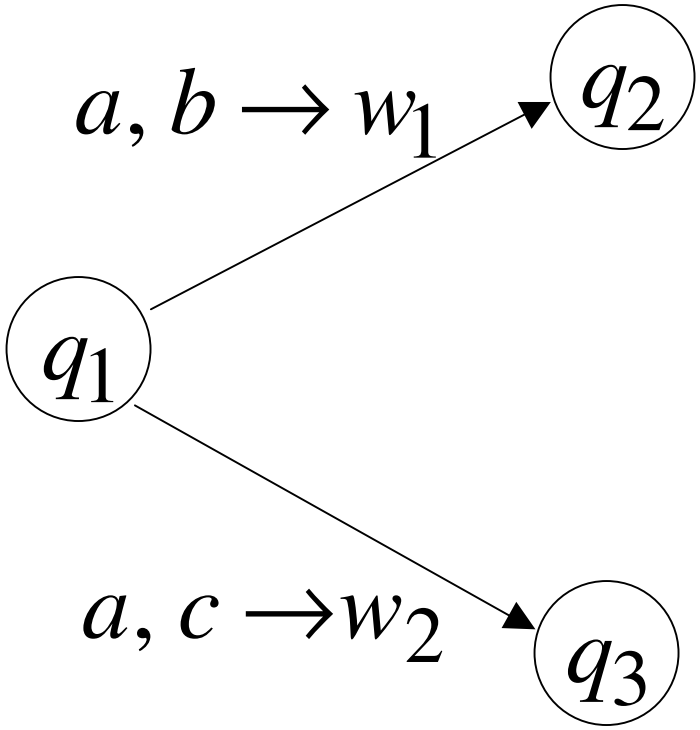

Not allowed:

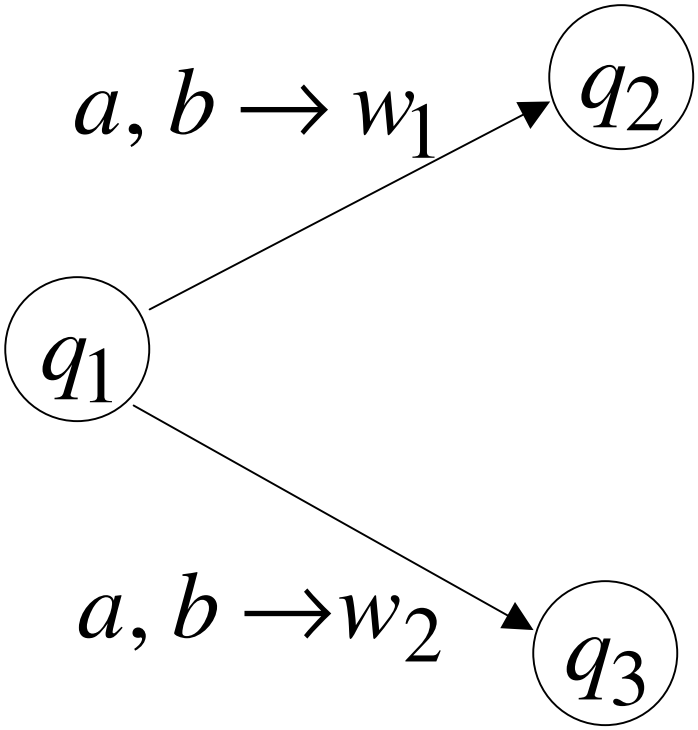

Allowed:

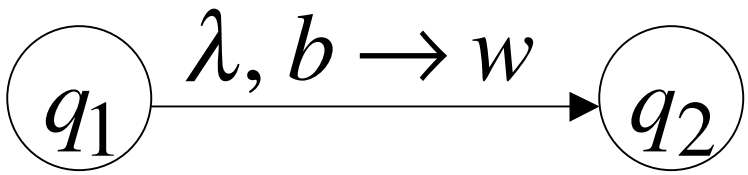

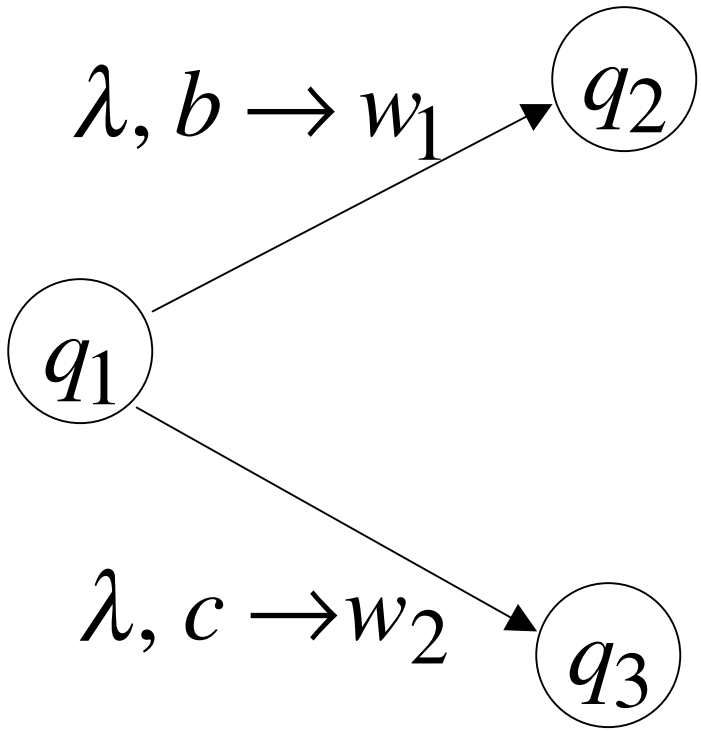

Something must be matched from the stack

Not allowed:

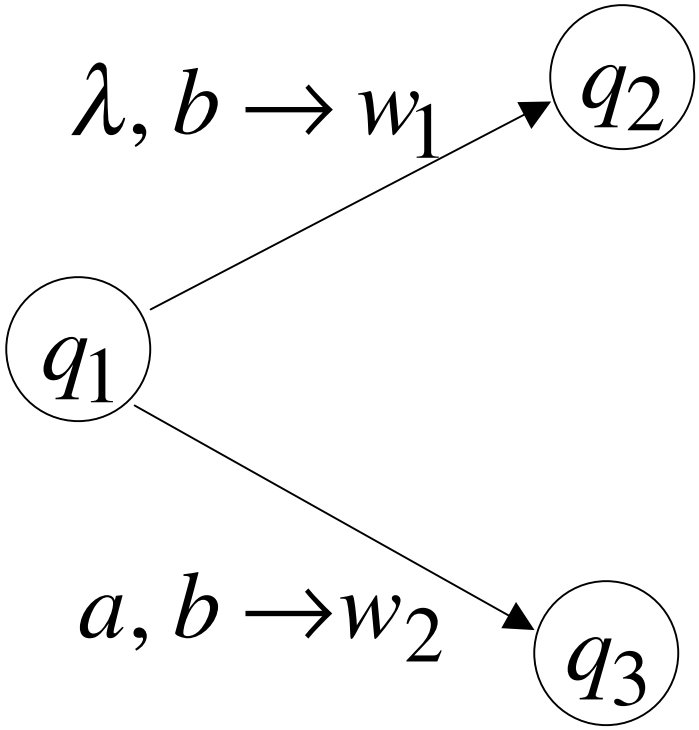

DPDA example

$$L(M) = \{a^n b^n : n \geq 0\}$$

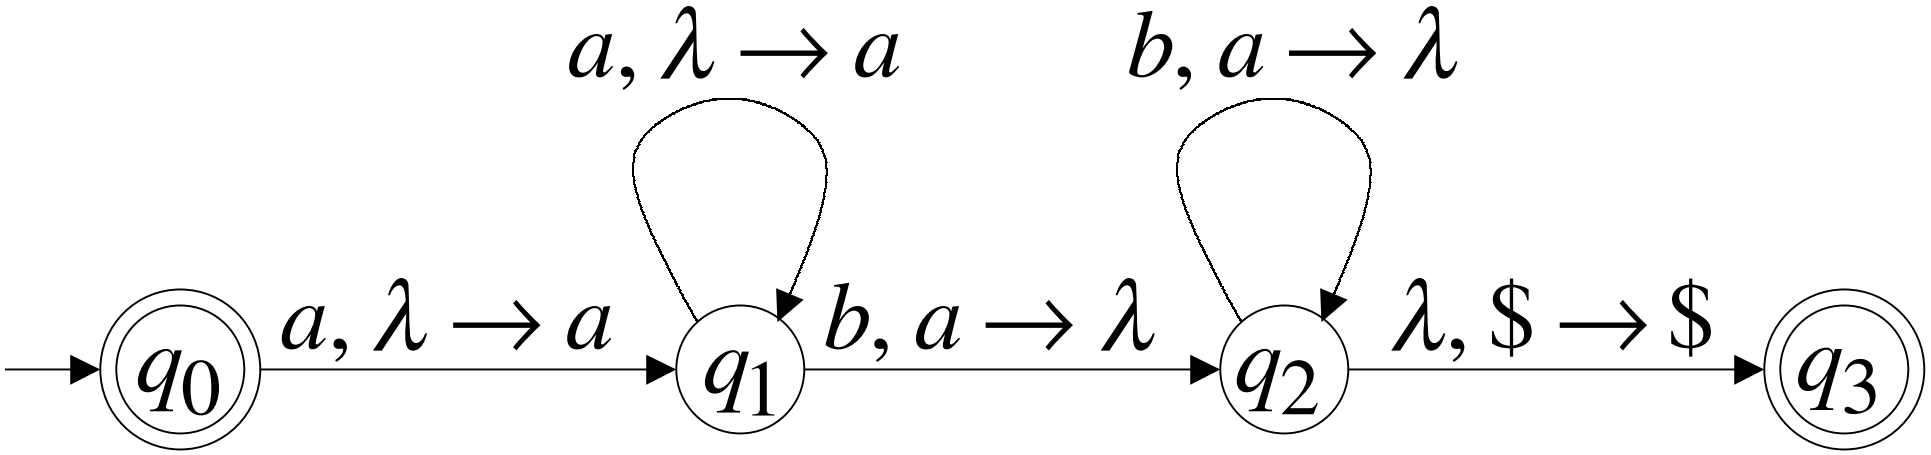

The language $L(M) = \{a^n b^n : n \geq 0\}$

is **deterministic context-free**

Definition:

A language is **deterministic context-free** if some DPDA accepts it

Example of Non-DPDA (NPDA)

$$L(M) = \{ww^R\}$$

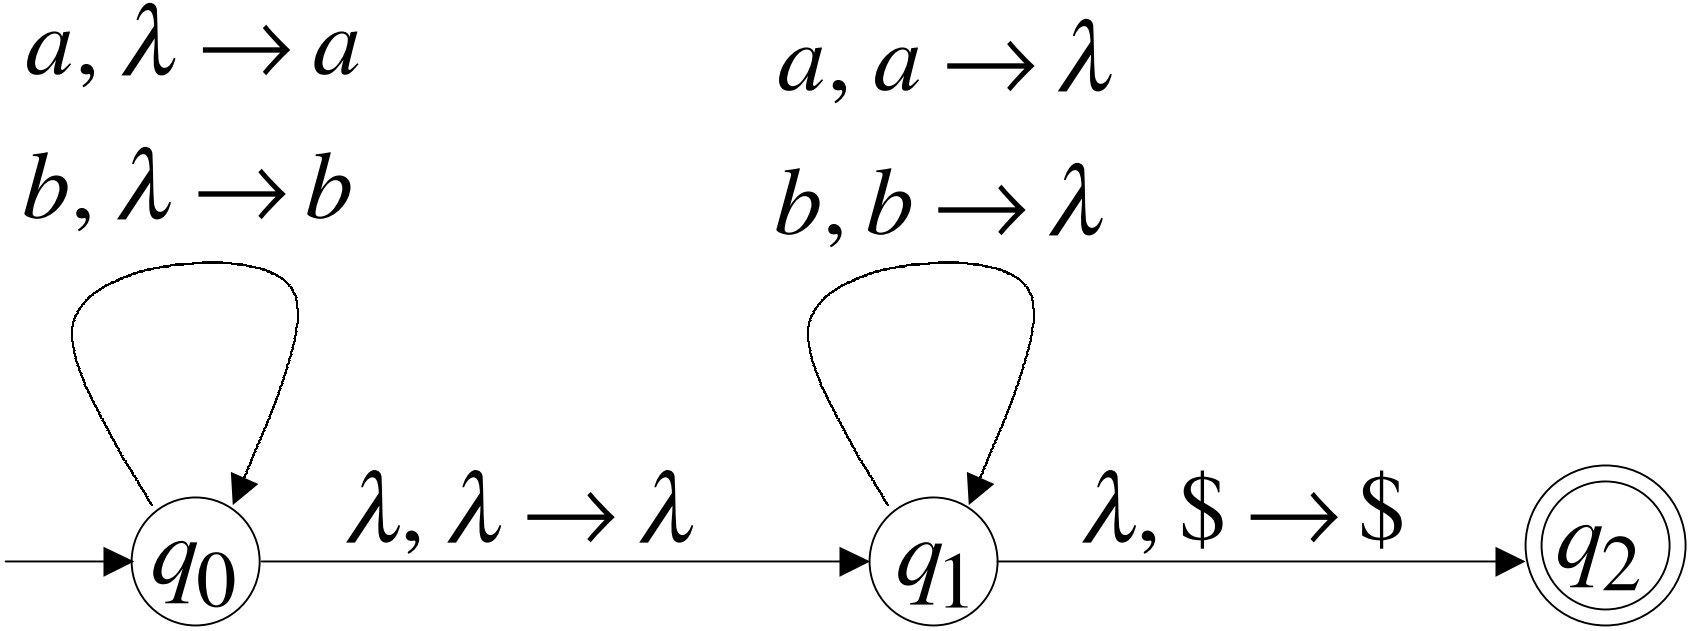

Not allowed in DPDAs

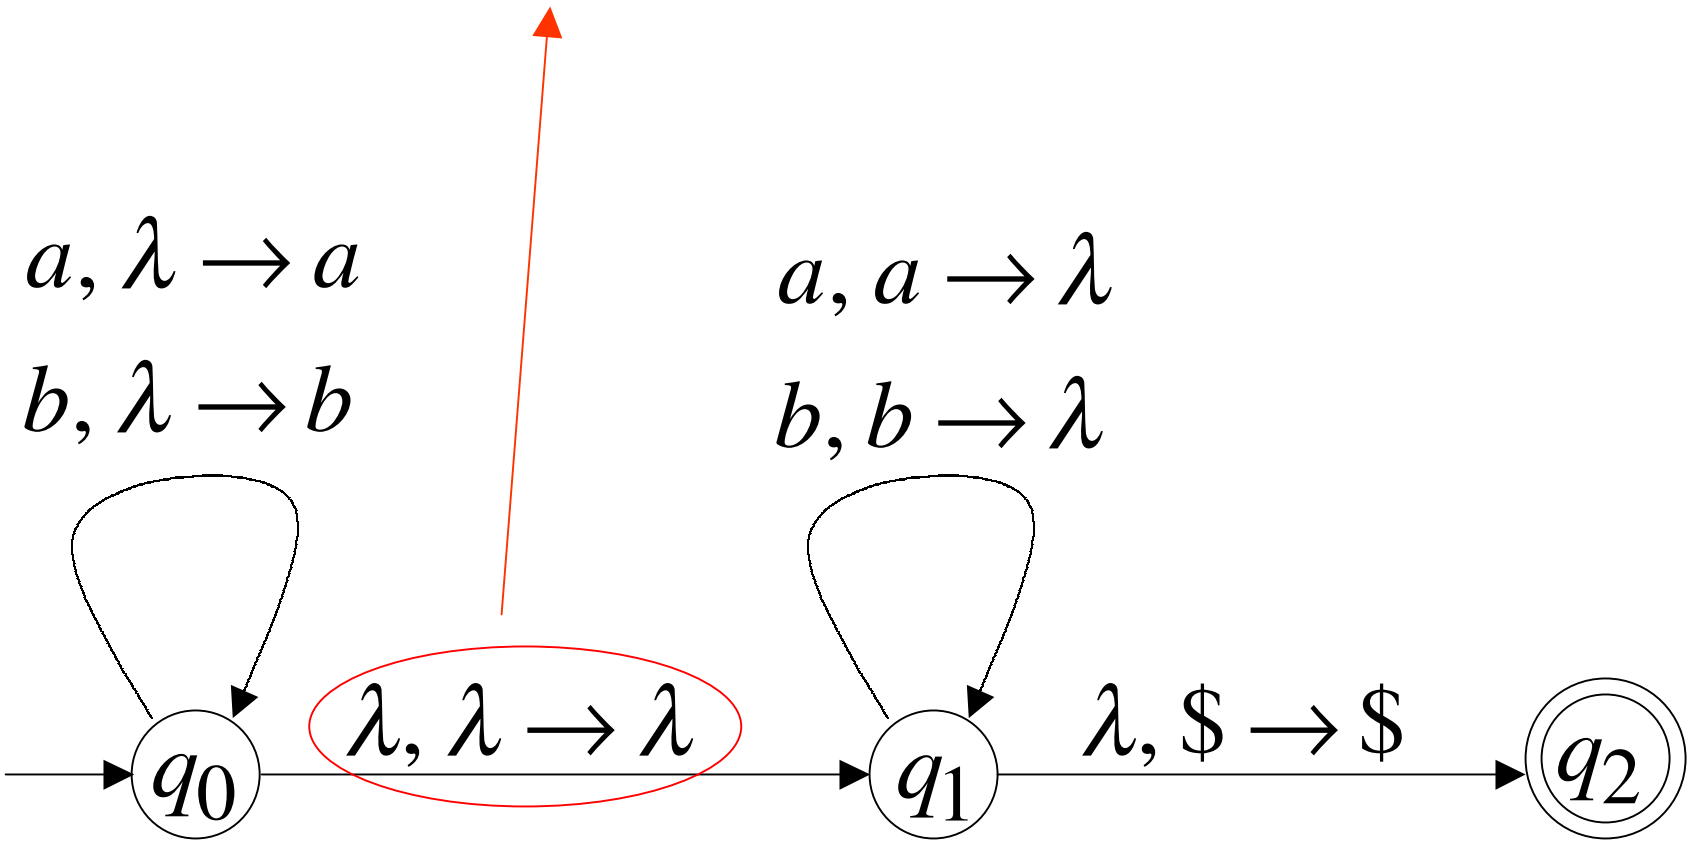

NPDAs

Have More Power than

DPDAs

We will show:

there is a context-free language L
(accepted by a NPDA)

which is **not** deterministic context-free
(**not** accepted by a DPDA)

The language is:

$$L = \{a^n b^n\} \cup \{a^n b^{2n}\}$$

$$n \geq 0$$

$$L = \{a^n b^n\} \cup \{a^n b^{2n}\}$$

The language L is context-free

Context-free grammar for L :

$$S \to S_1 \mid S_2$$

$$S_1 \to aS_1b \mid \lambda$$

$$S_2 \to aS_2bb \mid \lambda$$

there is an NPDA that accepts L

Theorem:

The language $L = \{a^n b^n\} \cup \{a^n b^{2n}\}$

is **not** deterministic context-free

(there is **no** DPDA that accepts L)

Proof: Assume for contradiction that

$$L = \{a^n b^n\} \cup \{a^n b^{2n}\}$$

is deterministic context free

Therefore:

there is a DPDA M that accepts L

DPDA M with $L(M)=\{a^n b^n\}\cup\{a^n b^{2n}\}$

accepts $a^n b^n$

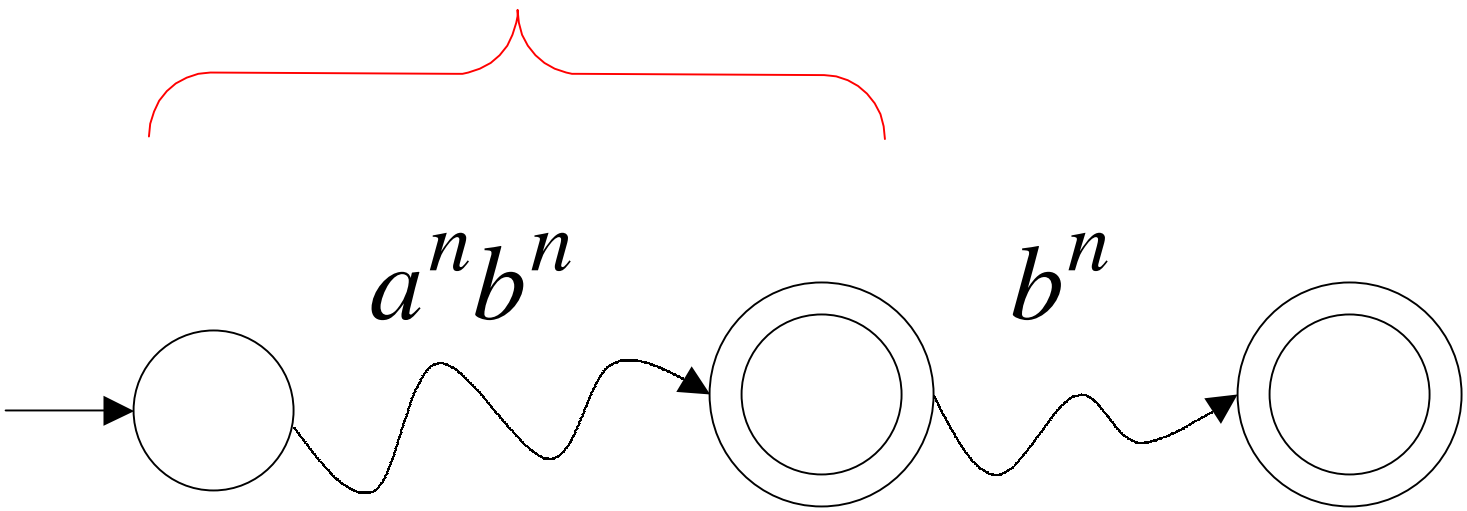

accepts $a^n b^{2n}$

Fact 1: The language $\{a^n b^n c^n\}$ is not context-free

(we will prove it at the next class)

Fact 2: The language $L \cup \{a^n b^n c^n\}$ is not context-free

$$(L = \{a^n b^n\} \cup \{a^n b^{2n}\})$$

(we will prove later today that the union of two context-free languages is context-free)

We will construct a NPDA that accepts:

$$L \cup \{a^n b^n c^n\}$$

Contradiction!

$$(L = \{a^n b^n\} \cup \{a^n b^{2n}\})$$

We modify M $(L = \{a^n b^n\} \cup \{a^n b^{2n}\})$

Replace b with c

Modified M $(L' = \{a^n c^n\} \cup \{a^n c^{2n}\})$

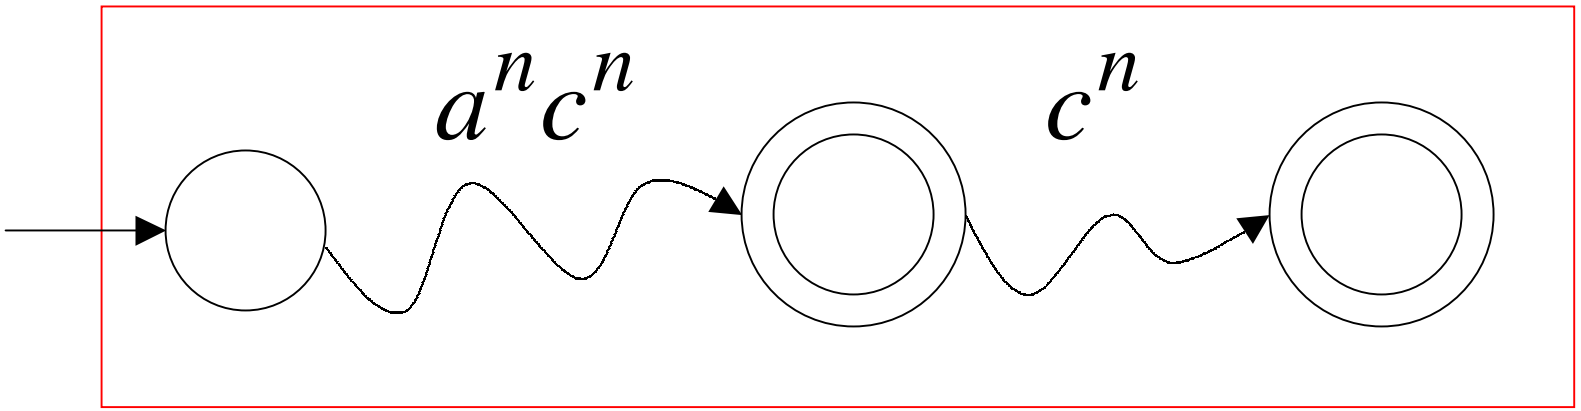

The NPDA that accepts $L \cup \{a^n b^n c^n\}$

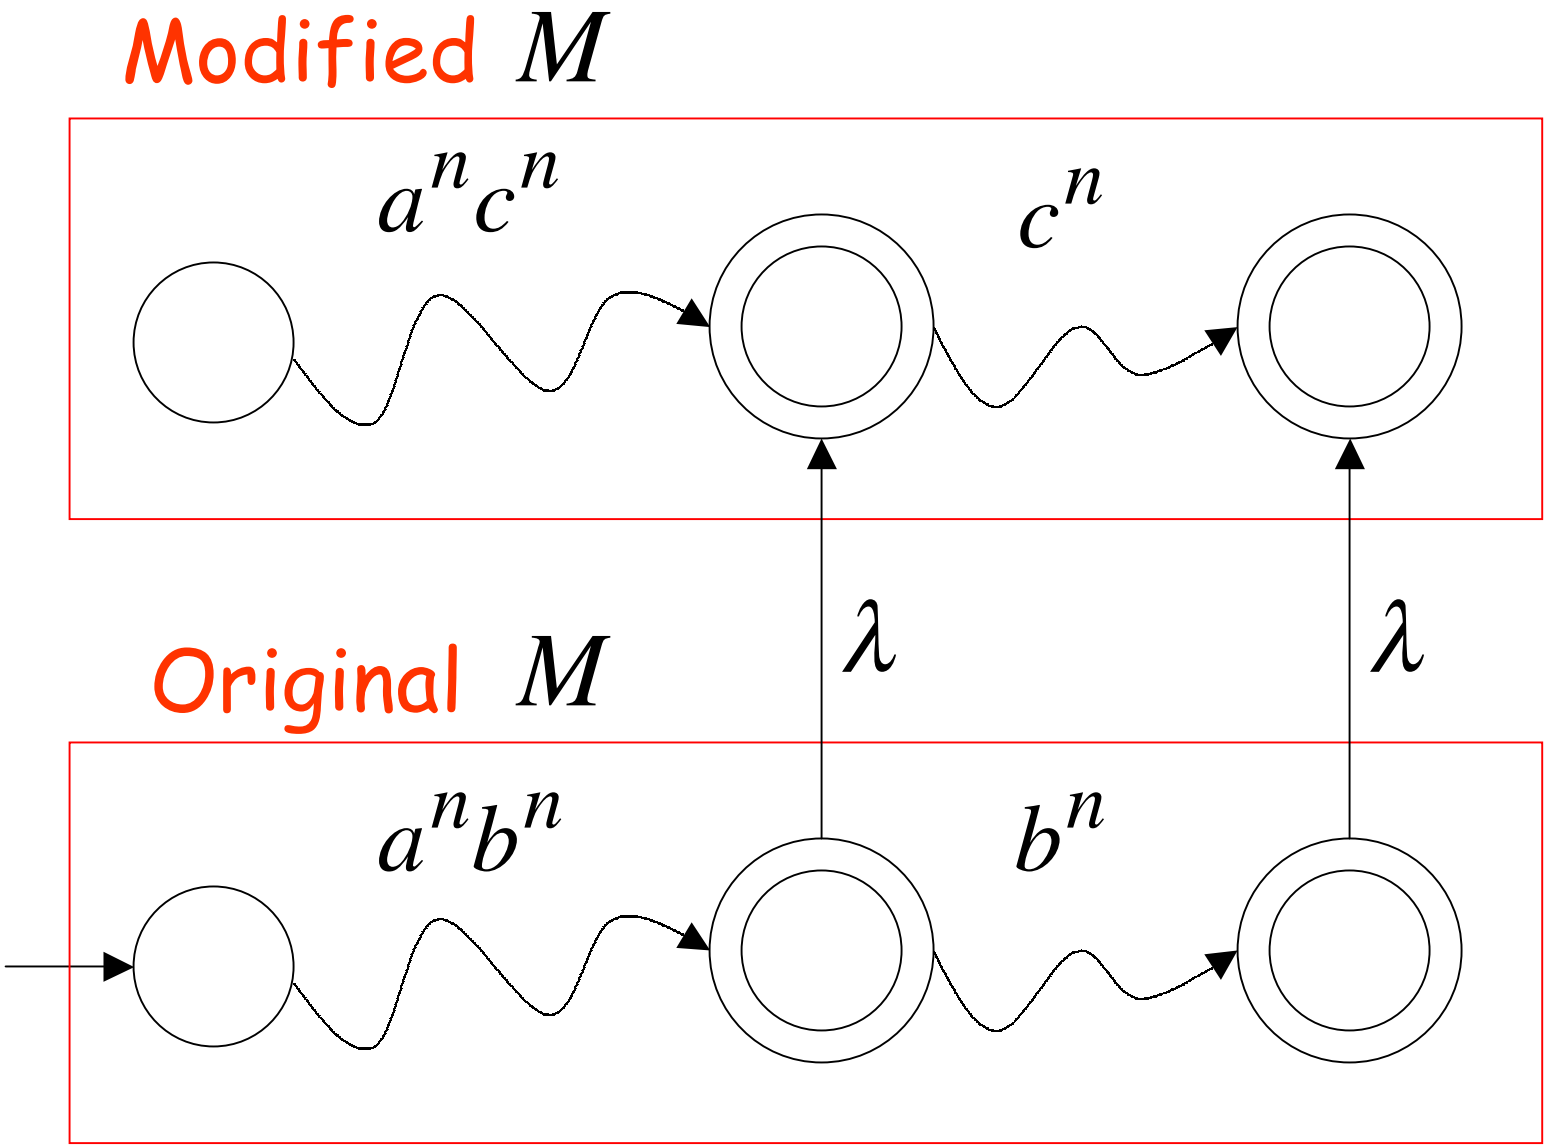

Since $L \cup \{a^n b^n c^n\}$ is accepted by a NPDA

it is context-free

Contradiction!

(since $L \cup \{a^n b^n c^n\}$ is not context-free)

Therefore:

There is **no** DPDA that accepts

$$L = \{a^n b^n\} \cup \{a^n b^{2n}\}$$

Not deterministic context free

End of Proof

Positive Properties of Context-Free languages

Union

Context-free languages
are closed under: **Union**

L_1 is context free

L_2 is context free

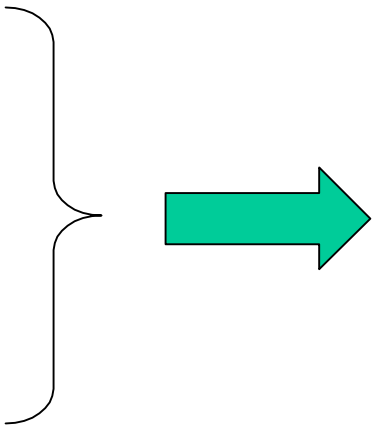

$L_1 \cup L_2$

is context-free

Example

Language

$$L_1 = \{a^n b^n\}$$

$$L_2 = \{ww^R\}$$

Grammar

$$S_1 \to aS_1b \mid \lambda$$

$$S_2 \to aS_2a \mid bS_2b \mid \lambda$$

Union

$$L = \{a^n b^n\} \cup \{ww^R\}$$

$$S \to S_1 \mid S_2$$

In general:

For context-free languages $L_1,\ L_2$

with context-free grammars $G_1,\ G_2$

and start variables $S_1,\ S_2$

The grammar of the **union** $L_1 \cup L_2$

has new start variable S

and additional production $S \to S_1 \mid S_2$

Concatenation

Context-free languages are closed under: **Concatenation**

L_1 is context free

L_2 is context free

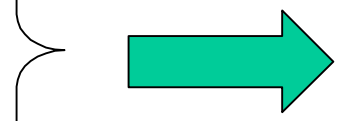

$L_1 L_2$ is context-free

Example

Language

$$L_1 = \{a^n b^n\}$$

$$L_2 = \{ww^R\}$$

$$L = \{a^n b^n\}\{ww^R\}$$

Grammar

$$S_1 \rightarrow aS_1b \mid \lambda$$

$$S_2 \rightarrow aS_2a \mid bS_2b \mid \lambda$$

Concatenation

$$S \rightarrow S_1S_2$$

In general:

For context-free languages $L_1,\ L_2$

with context-free grammars $G_1,\ G_2$

and start variables $S_1,\ S_2$

The grammar of the **concatenation** L_1L_2

has new start variable S

and additional production $S \to S_1S_2$

Star Operation

Context-free languages
are closed under: **Star-operation**

L is context free  L^* is context-free

Example

Language

$$L = \{a^n b^n\}$$

Grammar

$$S \rightarrow aSb \mid \lambda$$

Star Operation

$$L = \{a^n b^n\}^*$$

$$S_1 \rightarrow SS_1 \mid \lambda$$

In general:

For context-free language L

with context-free grammar G

and start variable S

The grammar of the **star operation** L^*

has new start variable S_1

and additional production $S_1 \rightarrow SS_1 \mid \lambda$

Negative Properties of Context-Free Languages

Intersection

Context-free languages are **not** closed under: **intersection**

L_1 is context free

L_2 is context free

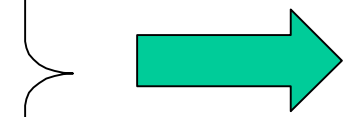

$L_1 \cap L_2$

not necessarily context-free

Example

$$L_1 = \{a^n b^n c^m\}$$

Context-free:

$$S \to AC$$

$$A \to aAb \mid \lambda$$

$$C \to cC \mid \lambda$$

$$L_2 = \{a^n b^m c^m\}$$

Context-free:

$$S \to AB$$

$$A \to aA \mid \lambda$$

$$B \to bBc \mid \lambda$$

Intersection

$$L_1 \cap L_2 = \{a^n b^n c^n\}$$ **NOT** context-free

Complement

Context-free languages are **not** closed under: **complement**

L is context free  $\overline{L}$ **not** necessarily context-free

Example

$$L_1 = \{a^n b^n c^m\}$$

Context-free:

$$S \to AC$$

$$A \to aAb \mid \lambda$$

$$C \to cC \mid \lambda$$

$$L_2 = \{a^n b^m c^m\}$$

Context-free:

$$S \to AB$$

$$A \to aA \mid \lambda$$

$$B \to bBc \mid \lambda$$

Complement

$$\overline{\overline{L_1} \cup \overline{L_2}} = L_1 \cap L_2 = \{a^n b^n c^n\}$$

NOT context-free

Intersection of Context-free languages and Regular Languages

The intersection of

a context-free language and

a regular language

is a context-free language

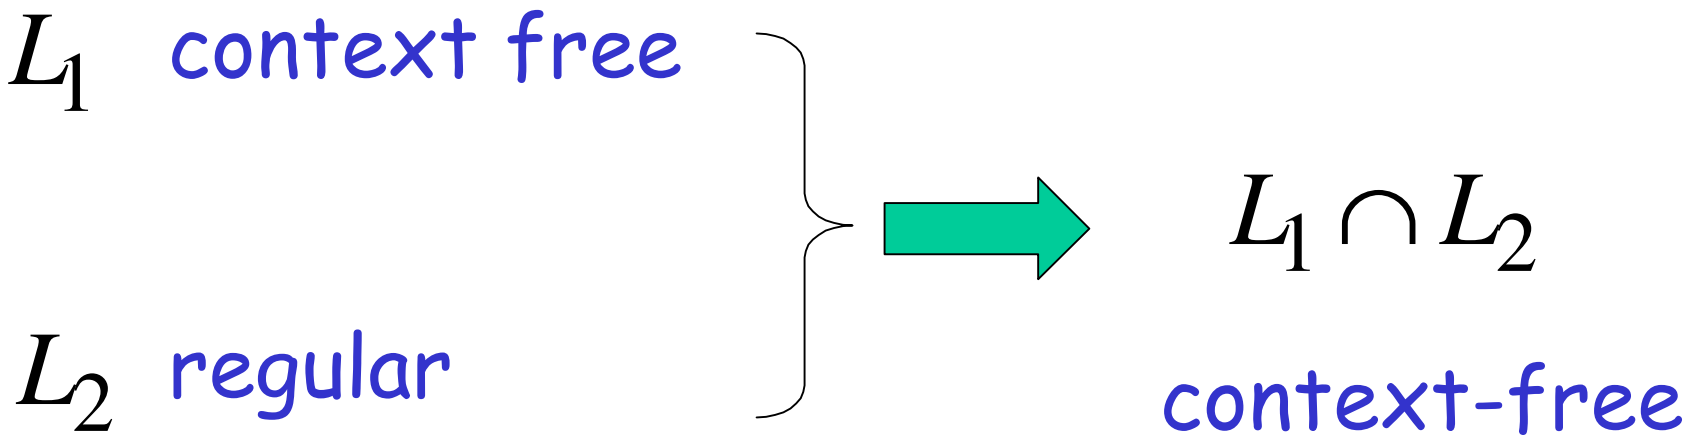

Machine M_1

NPDA for L_1

context-free

Machine M_2

DFA for L_2

regular

Construct a new NPDA machine M that accepts $L_1 \cap L_2$

M simulates in parallel M_1 and M_2

NPDA M_1

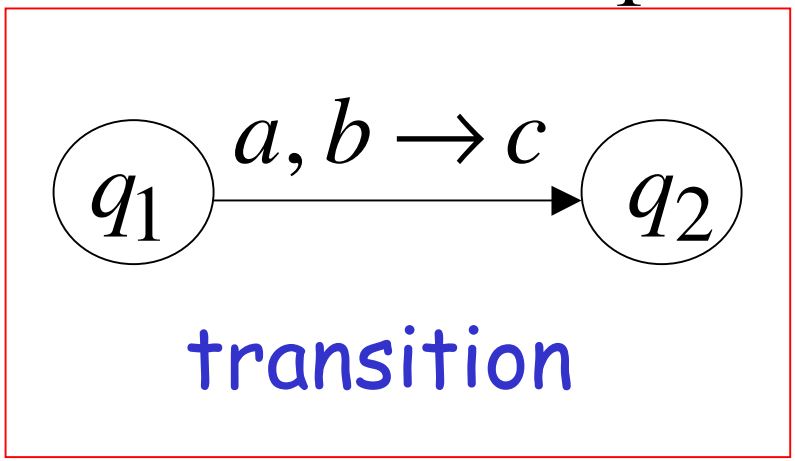

DFA M_2

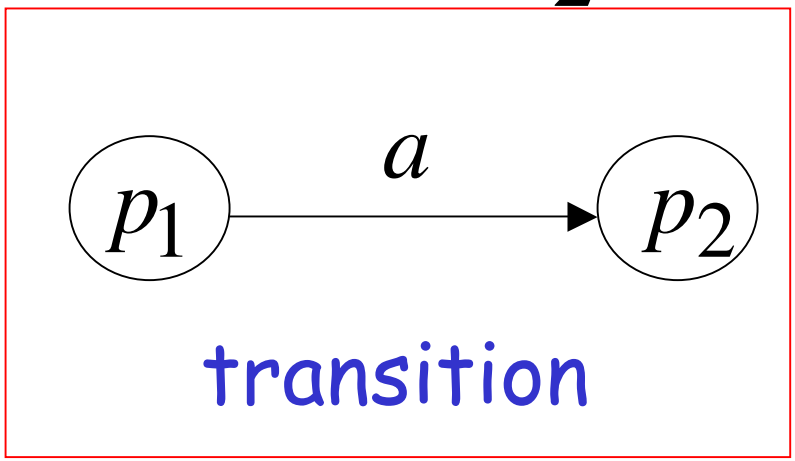

NPDA M

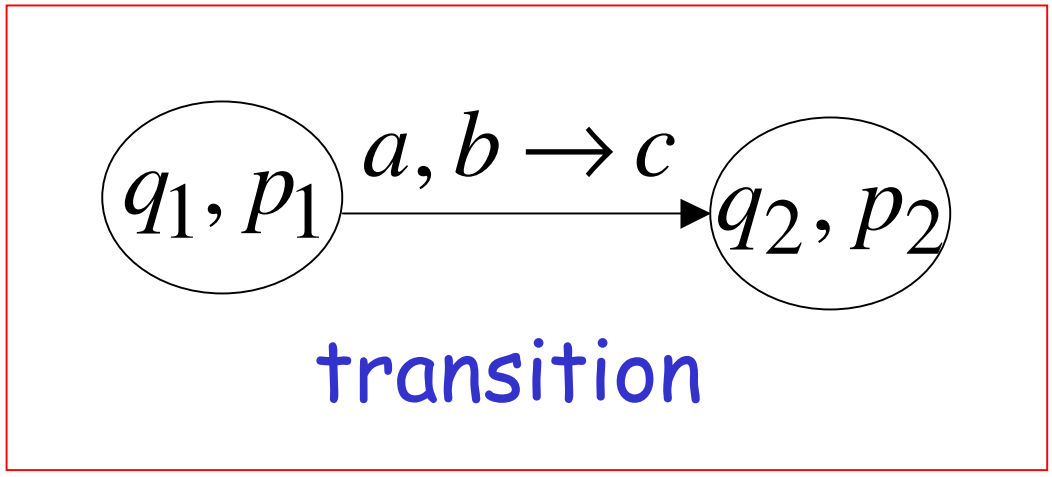

NPDA M_1

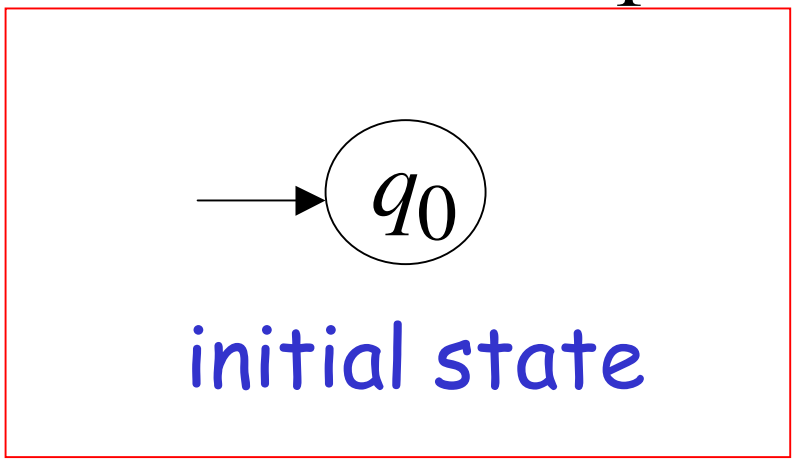

DFA M_2

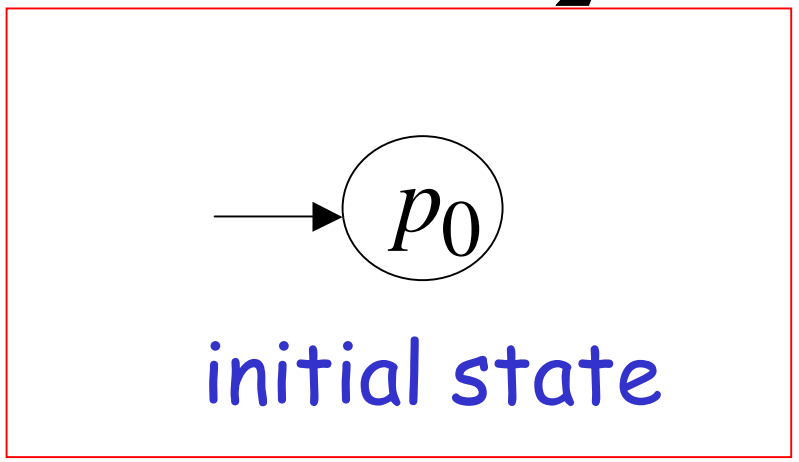

NPDA M

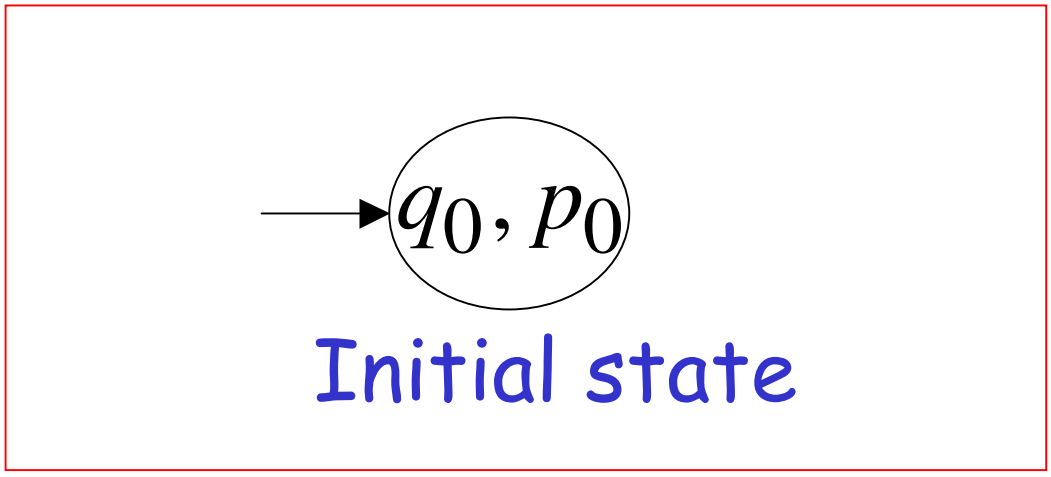

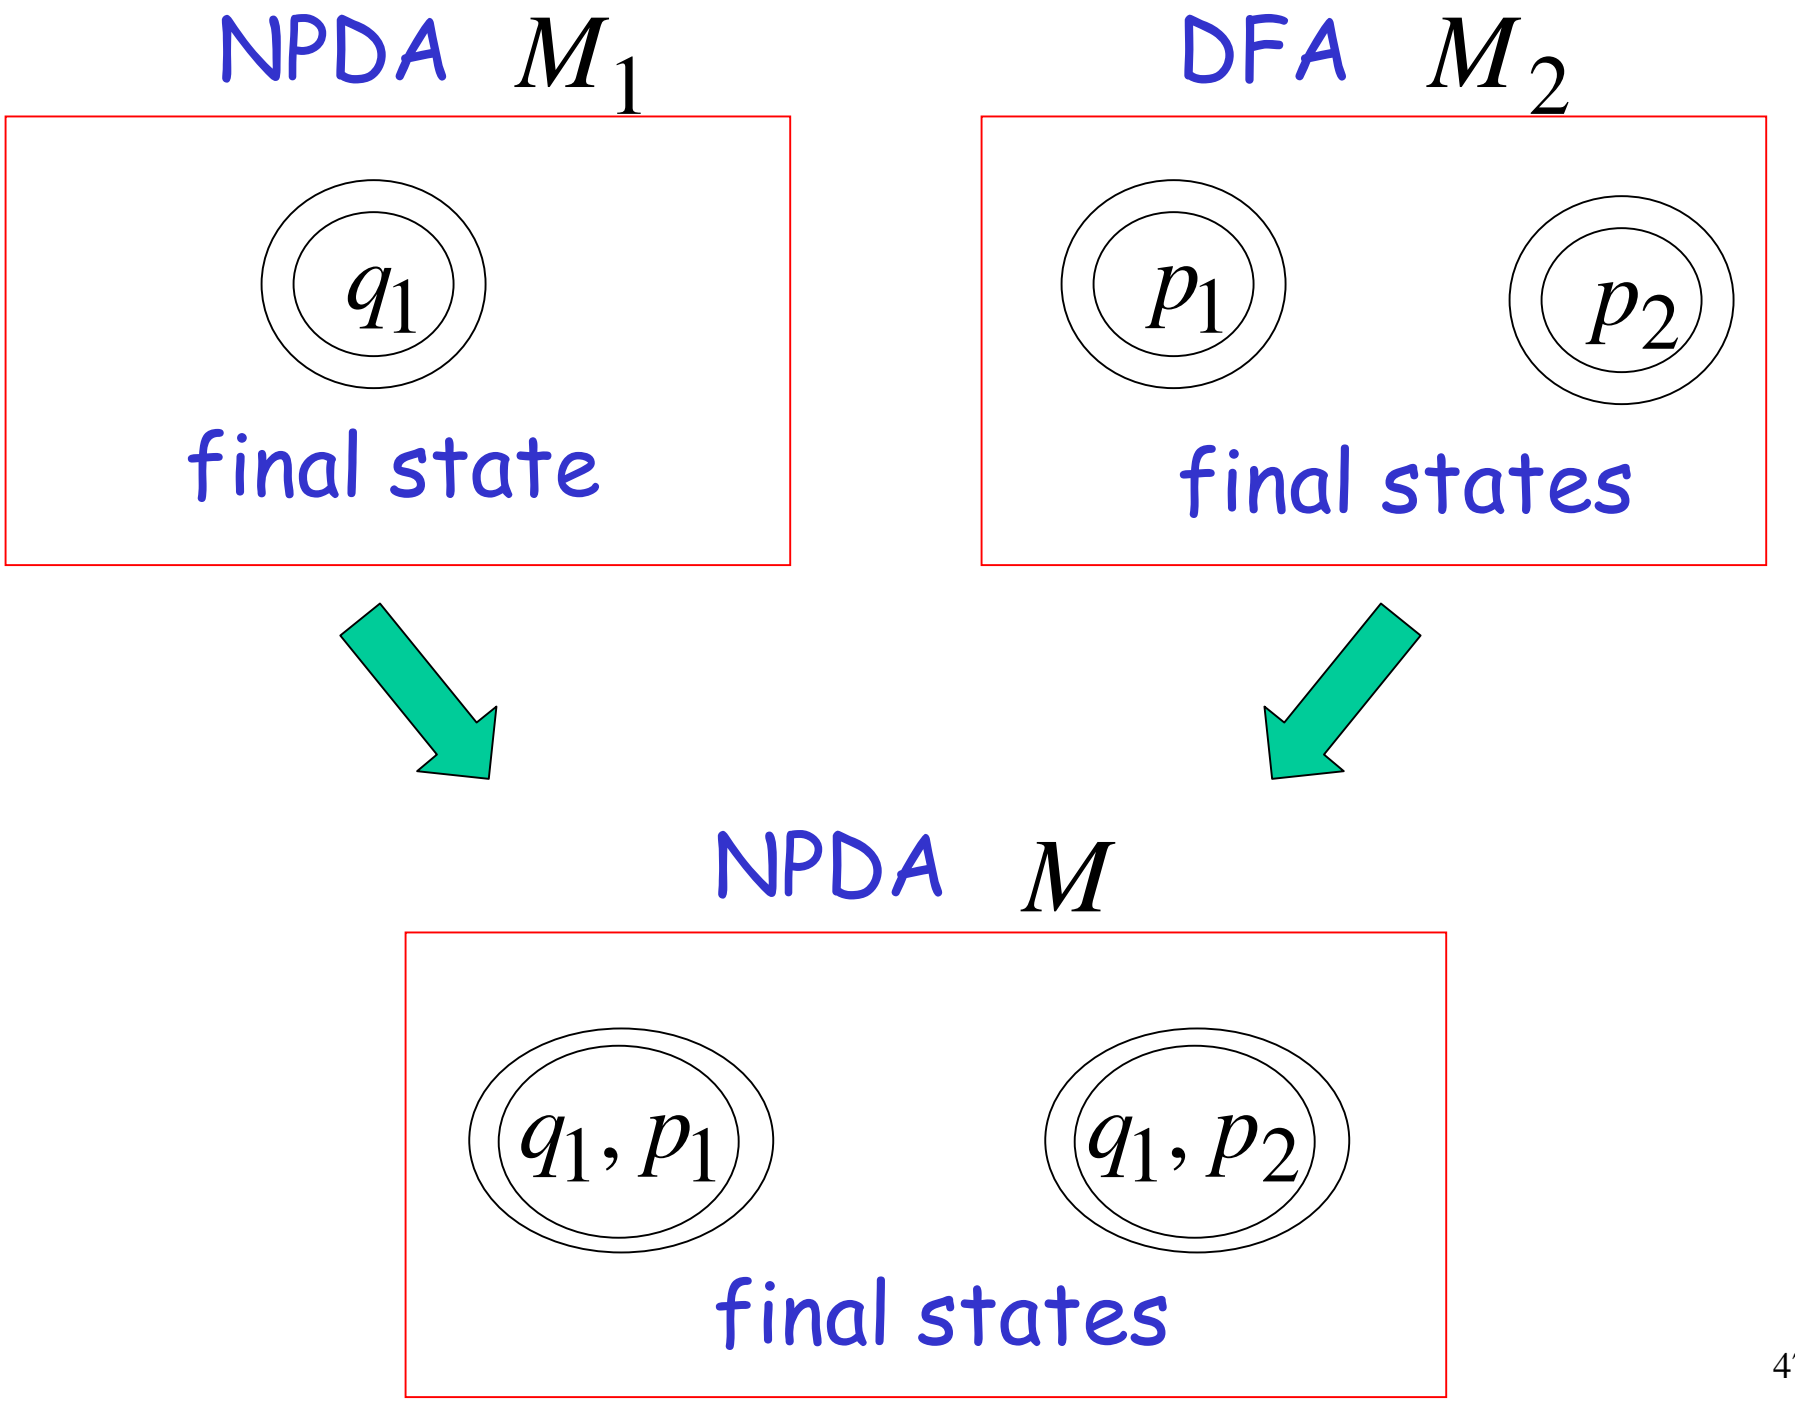
NPDA M_1
q_1
final state
DFA M_2
p_1
p_2
final states
NPDA M
q_1, p_1
q_1, p_2
final states

M simulates in parallel M_1 and M_2

M accepts string w if and only if

M_1 accepts string w and

M_2 accepts string w

$$L(M) = L(M_1) \cap L(M_2)$$

Therefore: $L(M_1) \cap L(M_2)$ is context-free

(since M is NPDA)



$L_1 \cap L_2$ is context-free