Applications of Regular Closure

The intersection of

a context-free language and

a regular language

is a context-free language

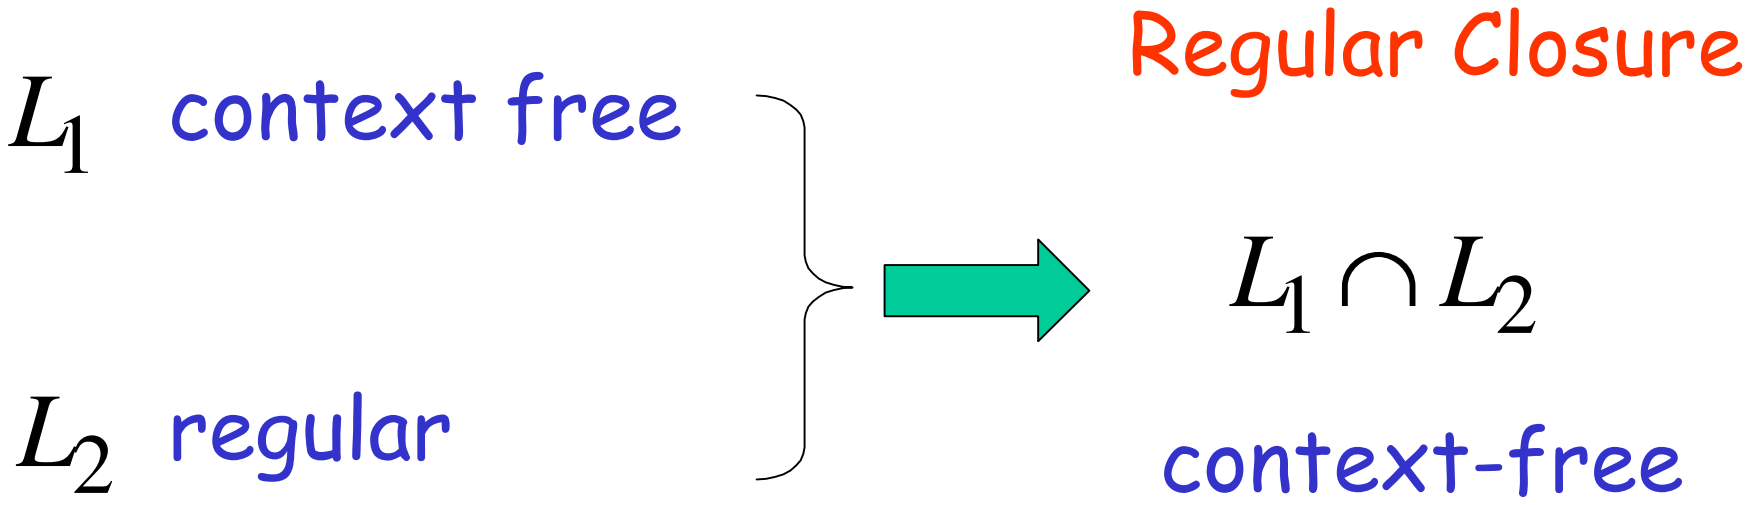

An Application of Regular Closure

Prove that: $L = \{a^n b^n : \ n \neq 100\}$

is context-free

We know: $\{a^n b^n\}$

is context-free

We also know:

$$L_1 = \{a^{100}b^{100}\}$$ is regular



$$\overline{L_1} = \{(a+b)^*\} - \{a^{100}b^{100}\}$$ is regular

$\{a^n b^n\}$ context-free

$\overline{L_1} = \{(a+b)^*\} - \{a^{100} b^{100}\}$ regular

(regular closure) $\{a^n b^n\} \cap \overline{L_1}$

is context-free

$\{a^n b^n\} \cap \overline{L_1}$

$= \{a^n b^n : \quad n \neq 100\} = L$ context-free

Another Application of Regular Closure

Prove that: $L = \{w: \quad n_a = n_b = n_c\}$

is **not** context-free

If $L = \{w: \quad n_a = n_b = n_c\}$ is context-free

(regular closure)

Then $L \cap \{a^*b^*c^*\} = \{a^n b^n c^n\}$

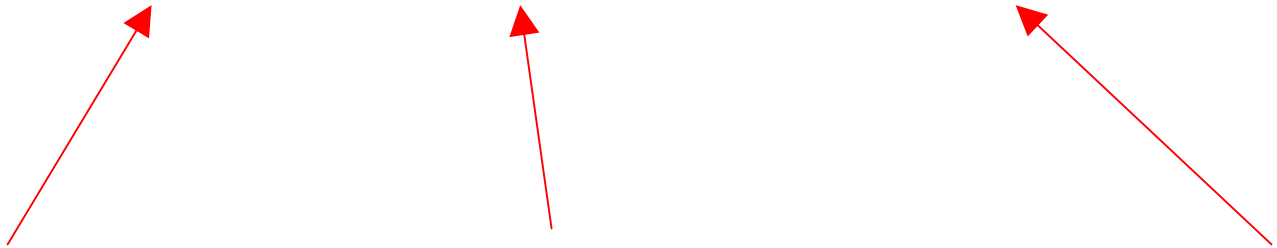

context-free regular context-free

Impossible!!!

Therefore, L is **not** context free

Decidable Properties of Context-Free Languages

Membership Question:

for context-free grammar G

find if string $w \in L(G)$

Membership Algorithms: Parsers

- Exhaustive search parser
- **CYK** parsing algorithm

Empty Language Question:

for context-free grammar G

find if $L(G) = \emptyset$

Algorithm:

1. Remove useless variables

2. Check if start variable S is useless

Infinite Language Question:

for context-free grammar G

find if $L(G)$ is infinite

Algorithm:

1. Remove useless variables
2. Remove unit and λ productions
3. Create dependency graph for variables
4. If there is a loop in the dependency graph then the language is infinite

Example: $S \to AB$

$A \to aCb \mid a$

$B \to bB \mid bb$

$C \to cBS$

Infinite language

Dependency graph

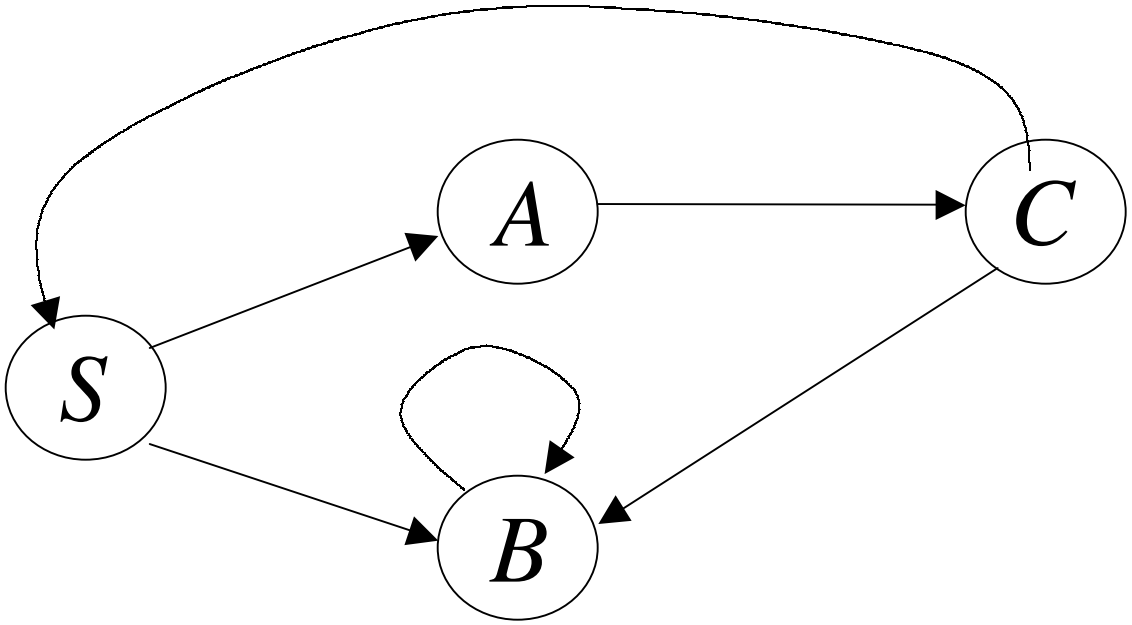

$$S \to AB$$

$$A \to aCb \mid a$$

$$B \to bB \mid bb$$

$$C \to cBS$$

$$S \Rightarrow AB \Rightarrow aCbB \Rightarrow acBSbB \Rightarrow acbbSbbb$$

$$S \overset{*}{\Rightarrow} acbbSbbb \overset{*}{\Rightarrow} (acbb)^2 S (bbb)^2$$

$$\overset{*}{\Rightarrow} (acbb)^i S (bbb)^i$$

The Pumping Lemma for Context-Free Languages

Take an **infinite** context-free language

Generates an infinite number
of different strings

Example:

$$S \to AB$$

$$A \to aBb$$

$$B \to Sb$$

$$B \to b$$

$$S \rightarrow AB$$

$$A \rightarrow aBb$$

$$B \rightarrow Sb$$

$$B \rightarrow b$$

A derivation:

$$S \Rightarrow AB \Rightarrow aBbB \Rightarrow abb\underline{B} \Rightarrow$$

$$\Rightarrow abbSb \Rightarrow abbABb \Rightarrow abbaBbBb \Rightarrow$$

$$\Rightarrow abbabb\underline{B}b \Rightarrow abbabbbb$$

Derivation tree

string $abbabbbb$

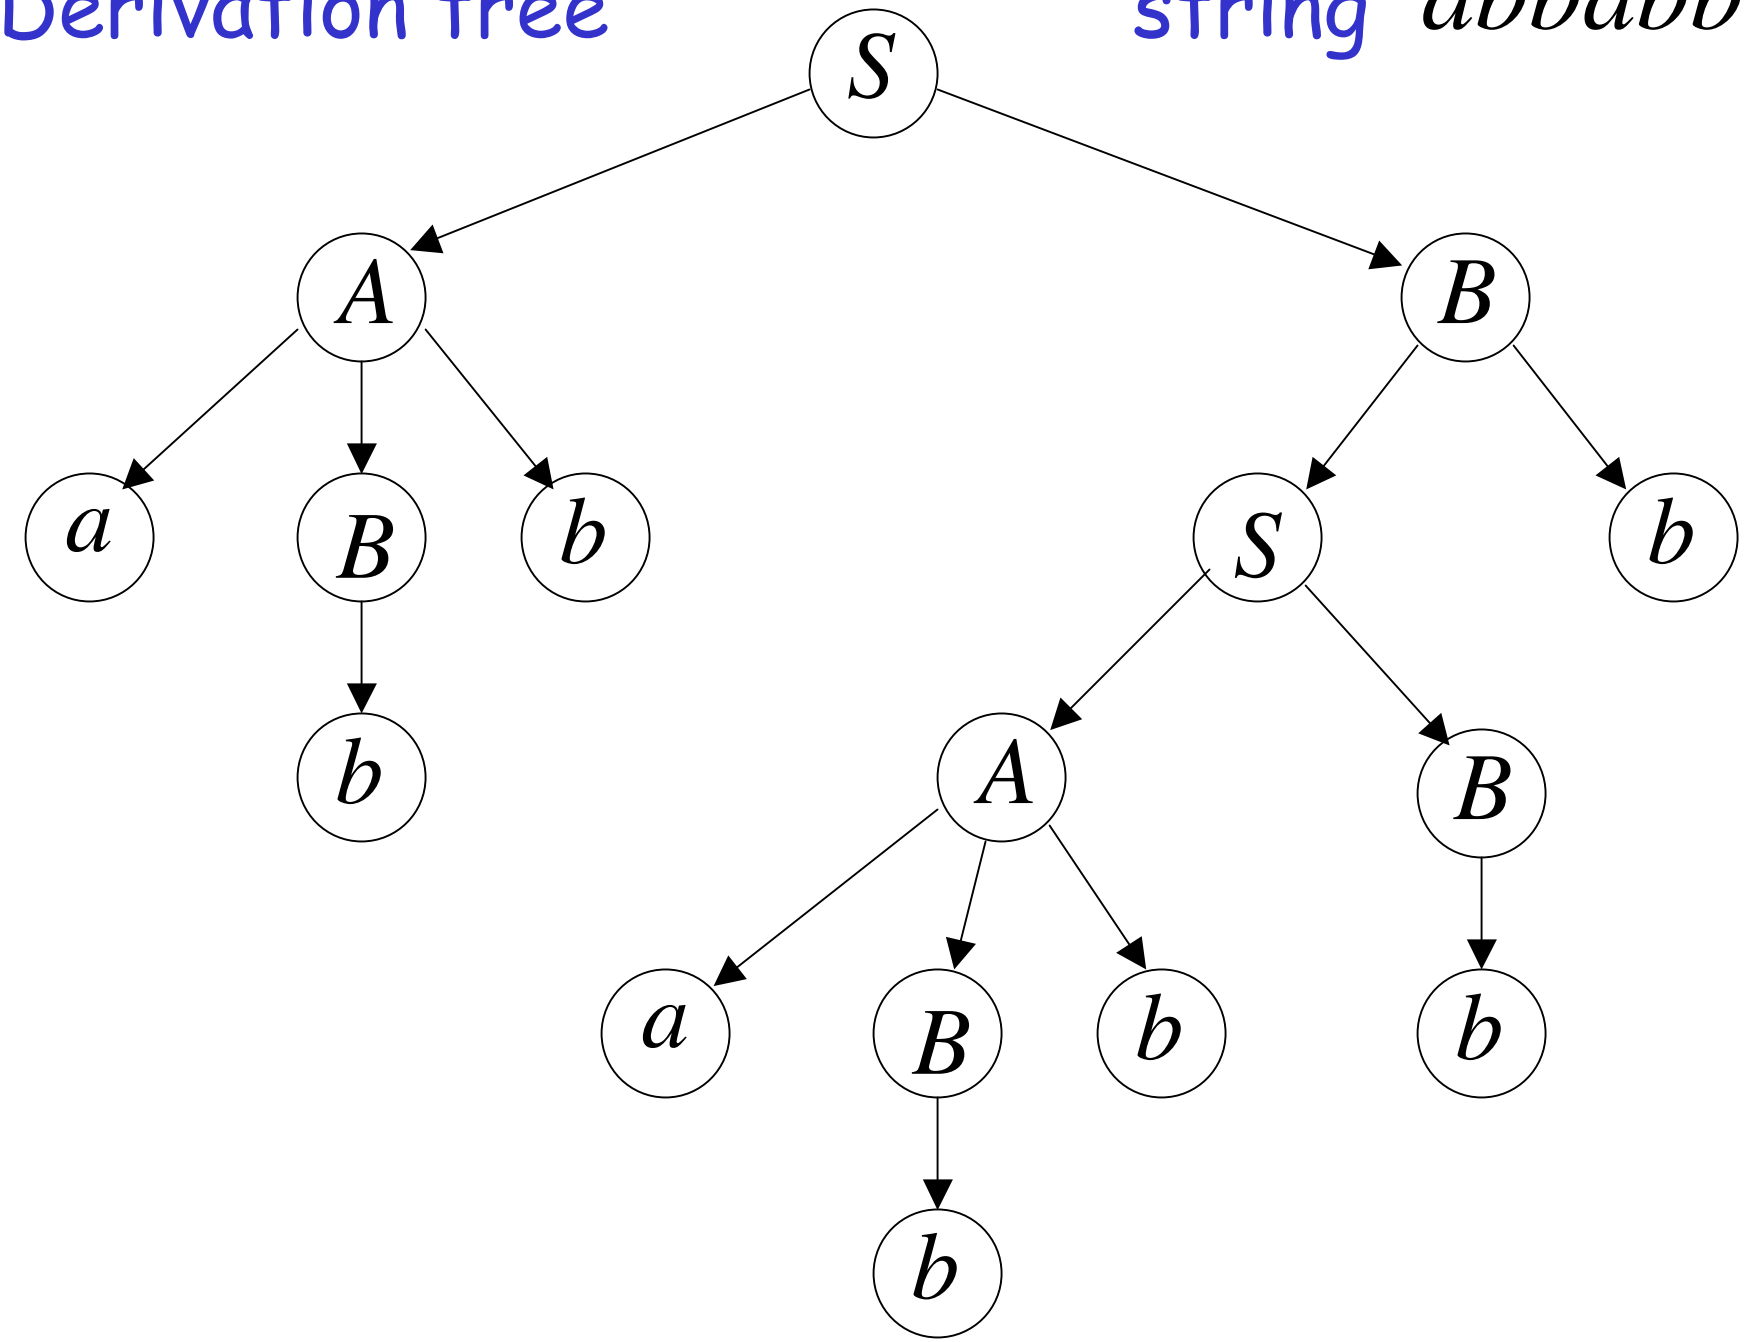

Derivation tree

string $abbabbbb$

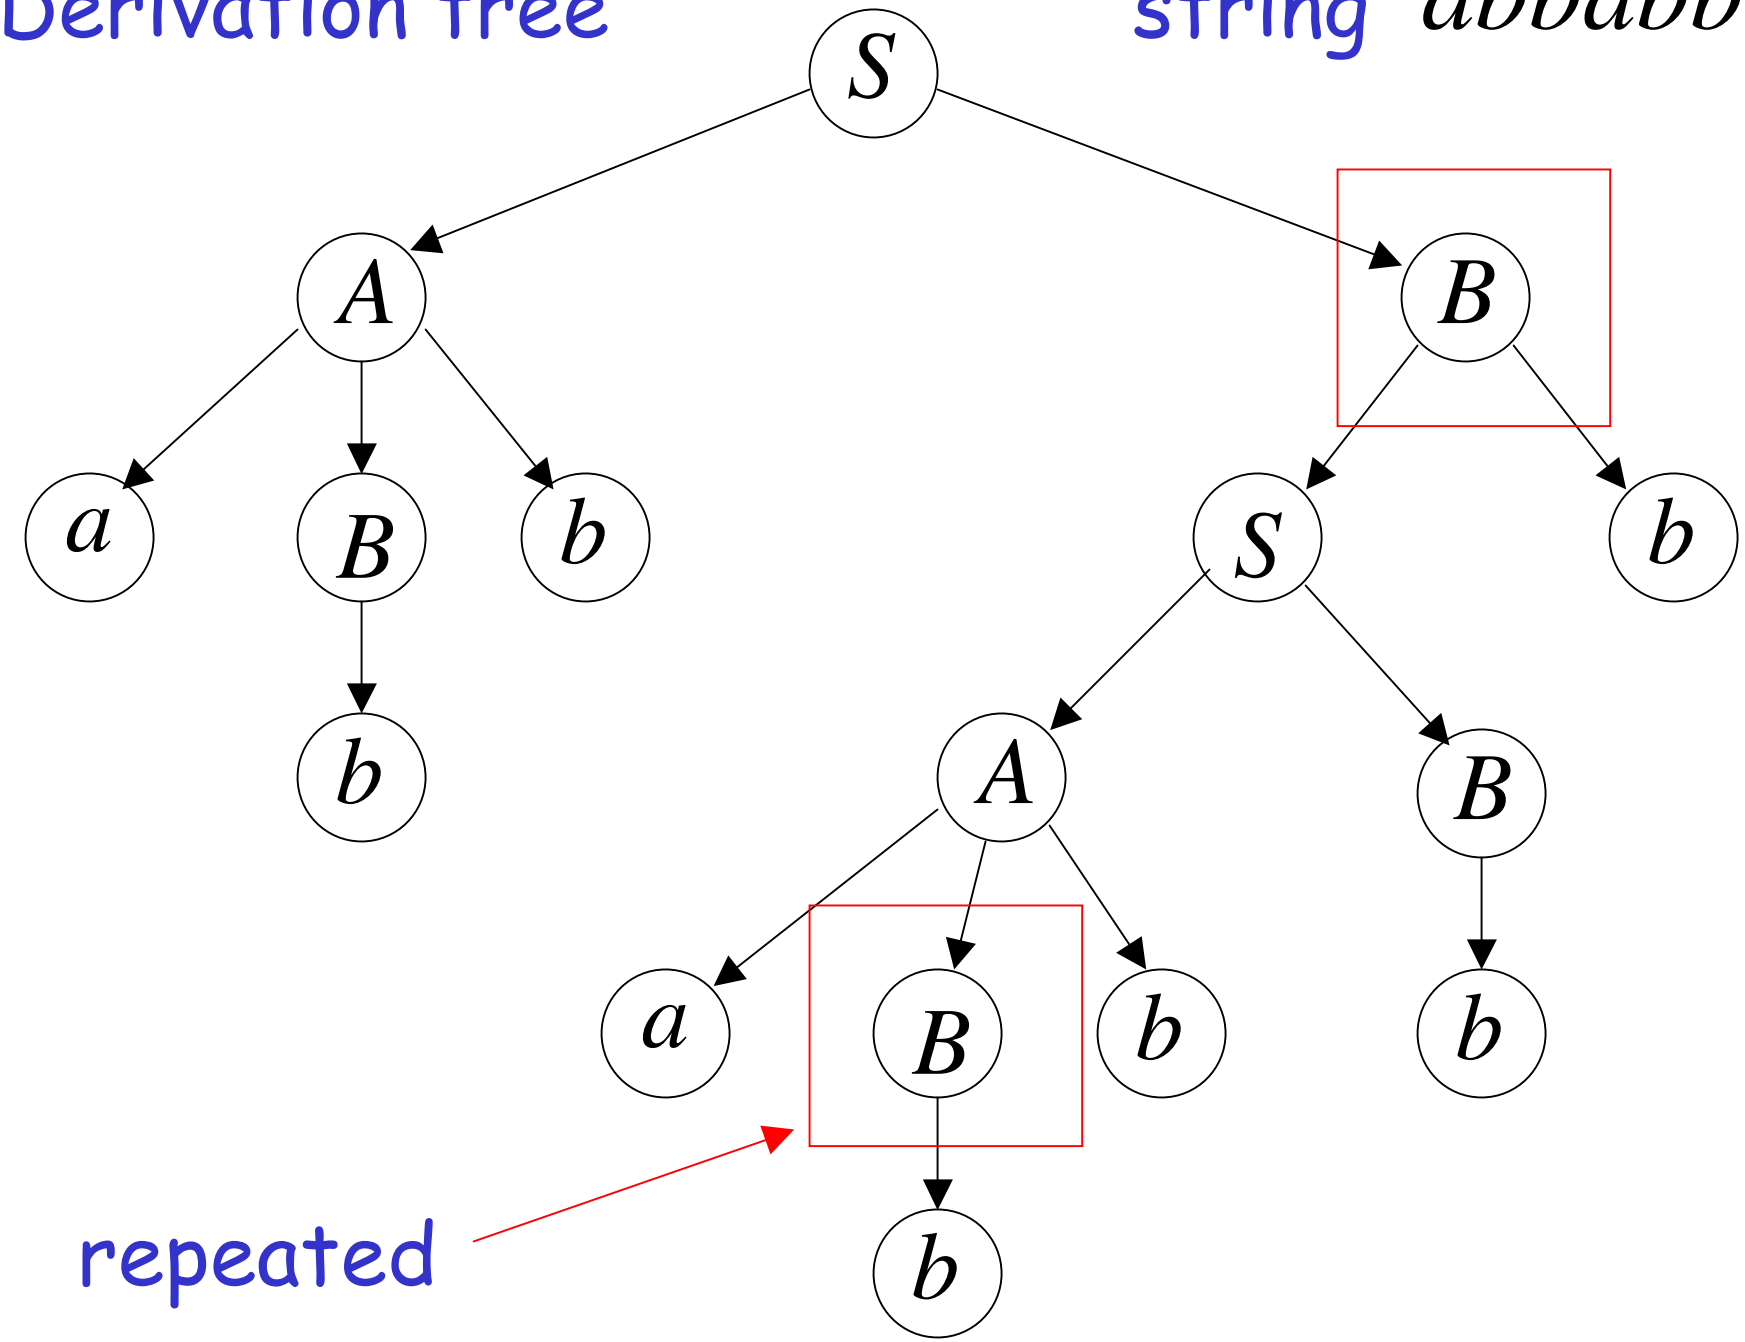

$$B \Rightarrow Sb \Rightarrow ABb \Rightarrow$$

$$\Rightarrow aBbBb \Rightarrow aBbbb$$

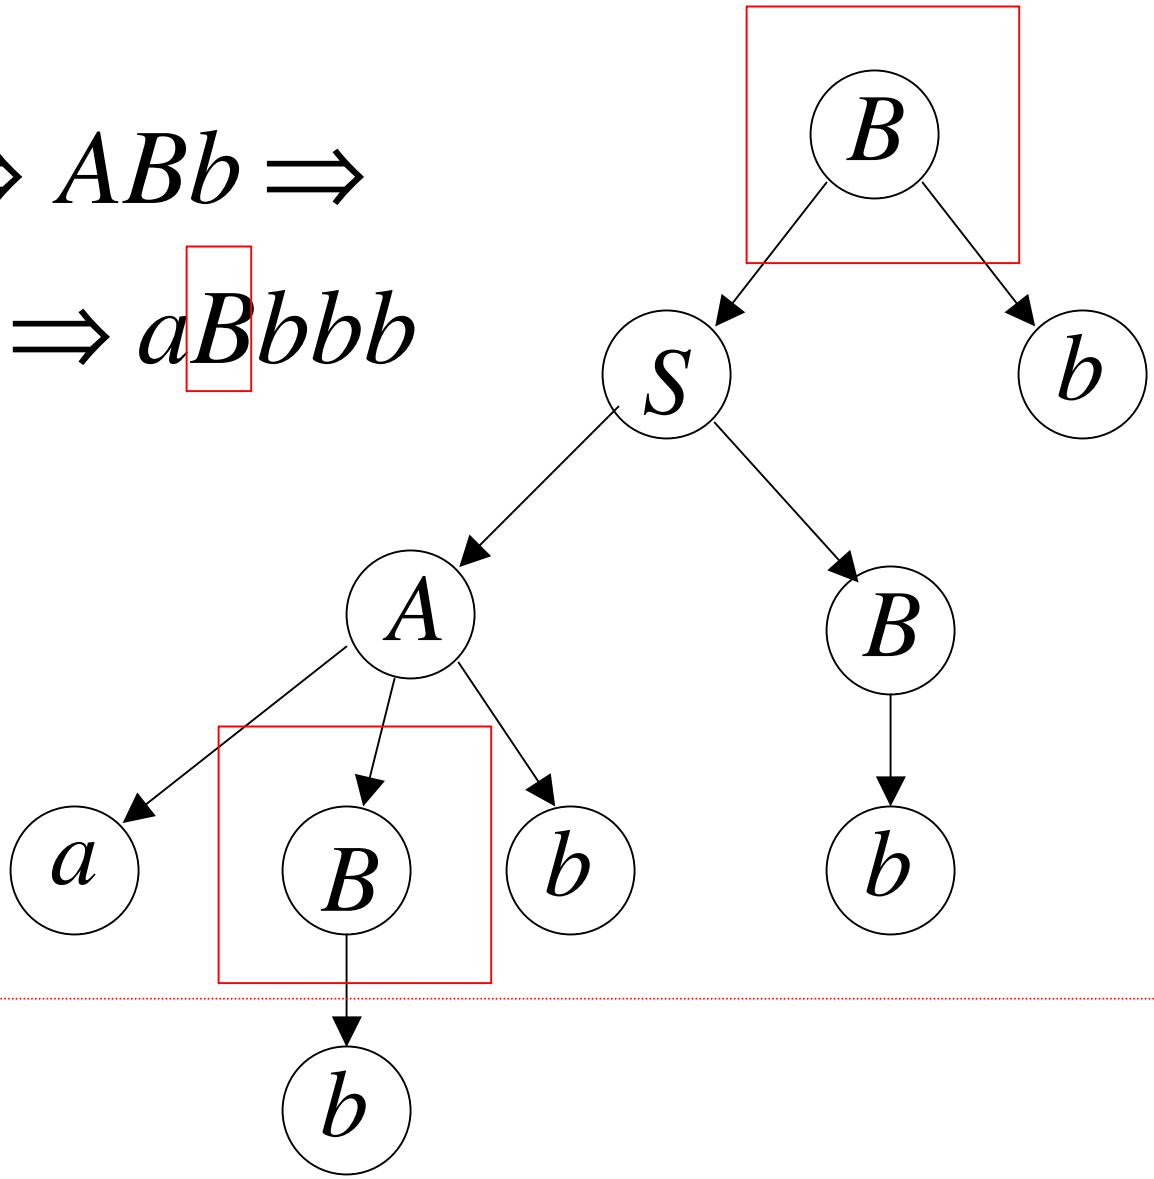

$$B \Rightarrow b$$

Repeated Part

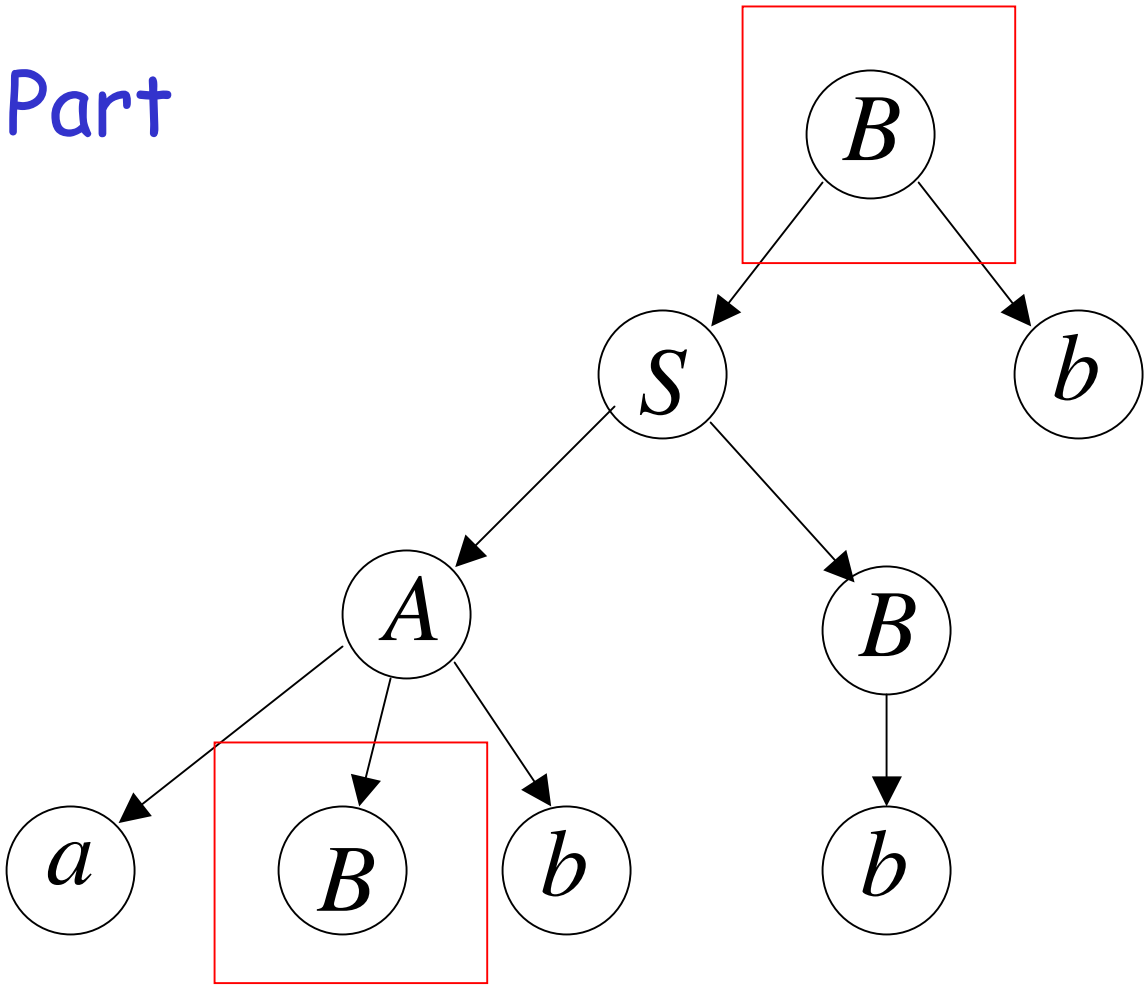

$$B \Rightarrow \ldots \Rightarrow aBbbb$$

Another possible derivation

$$B \Rightarrow \ldots \Rightarrow aBbbb$$

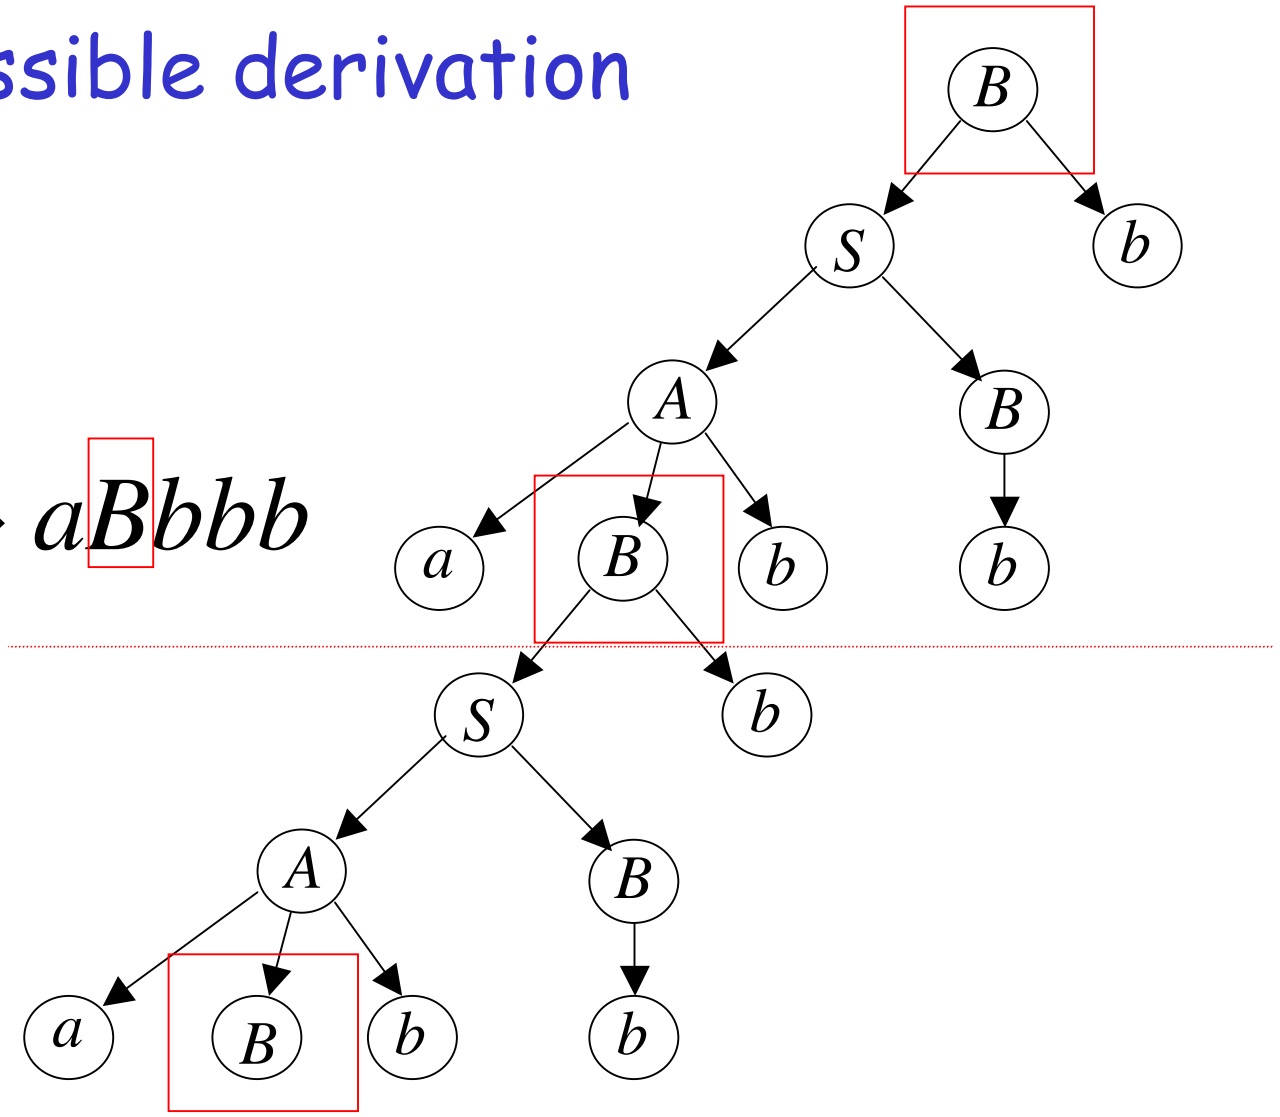

$$B \Rightarrow \ldots \Rightarrow aBbbb \ldots \Rightarrow aaBbbbbbb$$

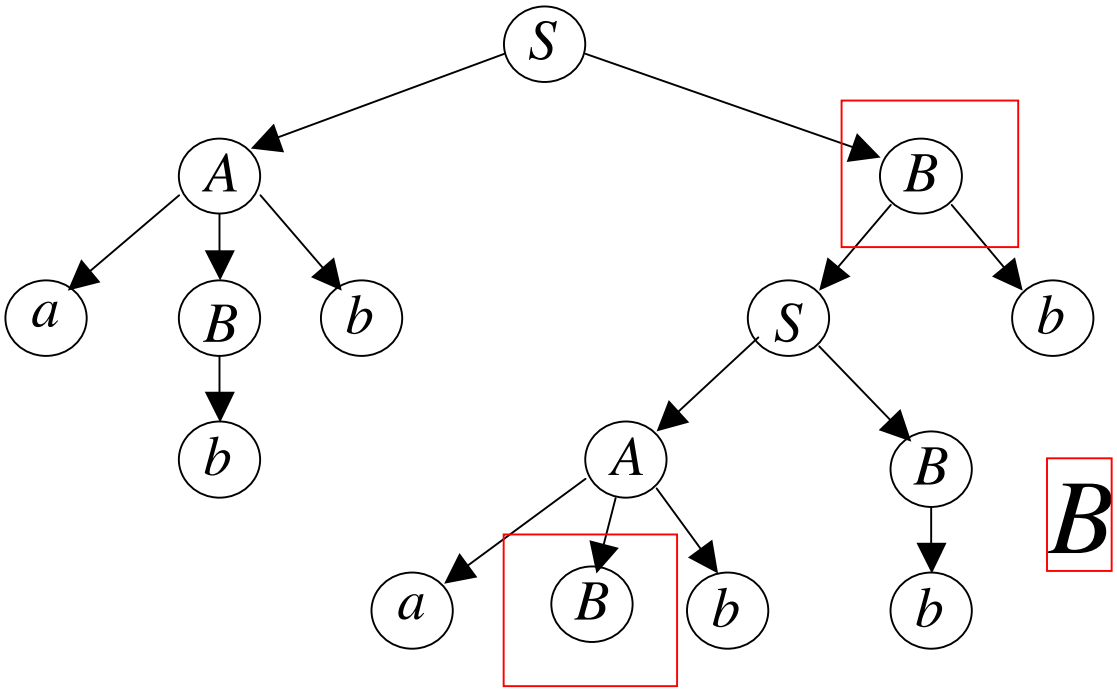

$$B \Rightarrow \ldots \Rightarrow aBbbb$$

$$S \Rightarrow \ldots \Rightarrow abbaBbbb$$

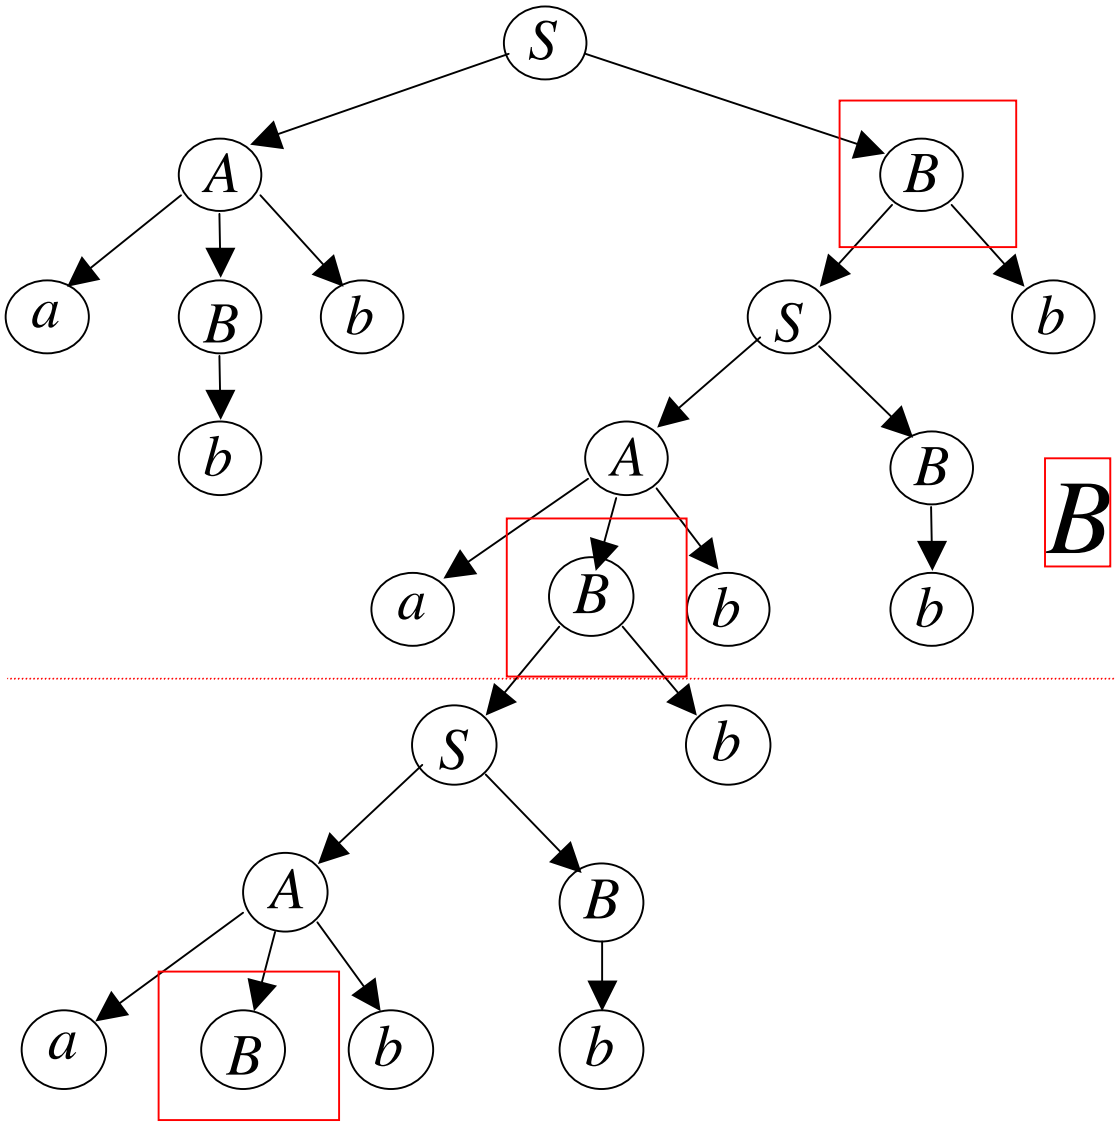

$$B \Rightarrow \ldots \Rightarrow aBbbb$$

$$S \Rightarrow \ldots \Rightarrow abbaBbbb \Rightarrow \ldots \Rightarrow abbaaBbbbbbb$$

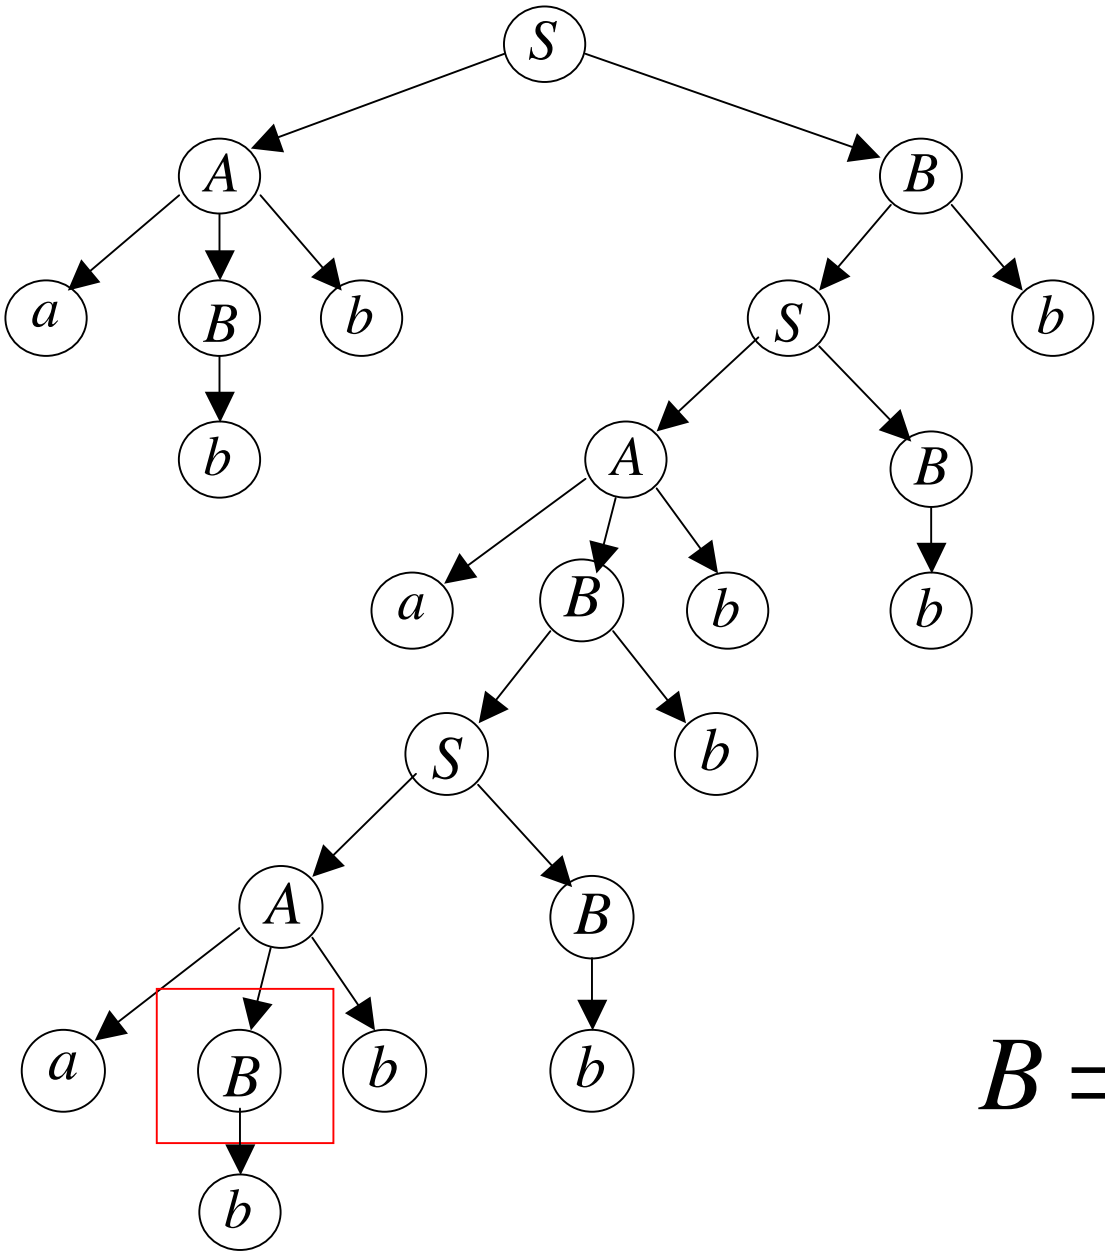

$$B \Rightarrow b$$

$$S \Rightarrow \ldots \Rightarrow abbaaBbbbbbb \Rightarrow abbaabbbbbbb$$

$$S \Rightarrow \ldots \Rightarrow abbaabbbbbbb$$

Therefore, the string

$$abbaabbbbbbb$$

is also generated by the grammar

We know: $B \Rightarrow b$

$B \Rightarrow \ldots \Rightarrow aBbbb$

$S \Rightarrow \ldots \Rightarrow abbaBbbb$

We also know this string is generated:

$S \Rightarrow \ldots \Rightarrow abbaBbbb \Rightarrow$

$\Rightarrow abbaabbbb$

We know: $B \Rightarrow b$

$B \Rightarrow \ldots \Rightarrow aBbbb$

$S \Rightarrow \ldots \Rightarrow abbaBbbb$

Therefore, this string is also generated:

$S \Rightarrow \ldots \Rightarrow abbaBbbb \Rightarrow$

$\Rightarrow abbaaBbbbbbb \Rightarrow$

$\Rightarrow abbaabbbbbbb$

We know: $B \Rightarrow b$

$$B \Rightarrow \ldots \Rightarrow aBbbb$$

$$S \Rightarrow \ldots \Rightarrow abbaBbbb$$

Therefore, this string is also generated:

$$S \Rightarrow \ldots \Rightarrow abbaBbbb \Rightarrow$$

$$\Rightarrow abba(a)B(bbb)bbb$$

$$\Rightarrow abba(a)^2 B(bbb)^2 bbb$$

$$\Rightarrow abba(a)^2 b(bbb)^2 bbb$$

We know: $B \Rightarrow b$

$B \Rightarrow \ldots \Rightarrow aBbbb$

$S \Rightarrow \ldots \Rightarrow abbaBbbb$

Therefore, this string is also generated:

$S \Rightarrow \ldots \Rightarrow abbaBbbb \Rightarrow$

$\Rightarrow \ldots$

$\Rightarrow abba(a)^i B(bbb)^i bbb$

$\Rightarrow abba(a)^i b(bbb)^i bbb$

Therefore, knowing that

$$abbabbbb$$

is generated by grammar G,
we also know that

$$abba(a)^i b(bbb)^i bbb$$

is generated by G

In general:

We are given an infinite context-free grammar G

Assume G has no unit-productions
no λ-productions

Take a string $w \in L(G)$
with length bigger than

m > (Number of productions) ×
(Largest right side of a production)

Consequence:

Some variable must be repeated
in the derivation of w

u, v, x, y, z : strings of terminals

String $w = uvxyz$

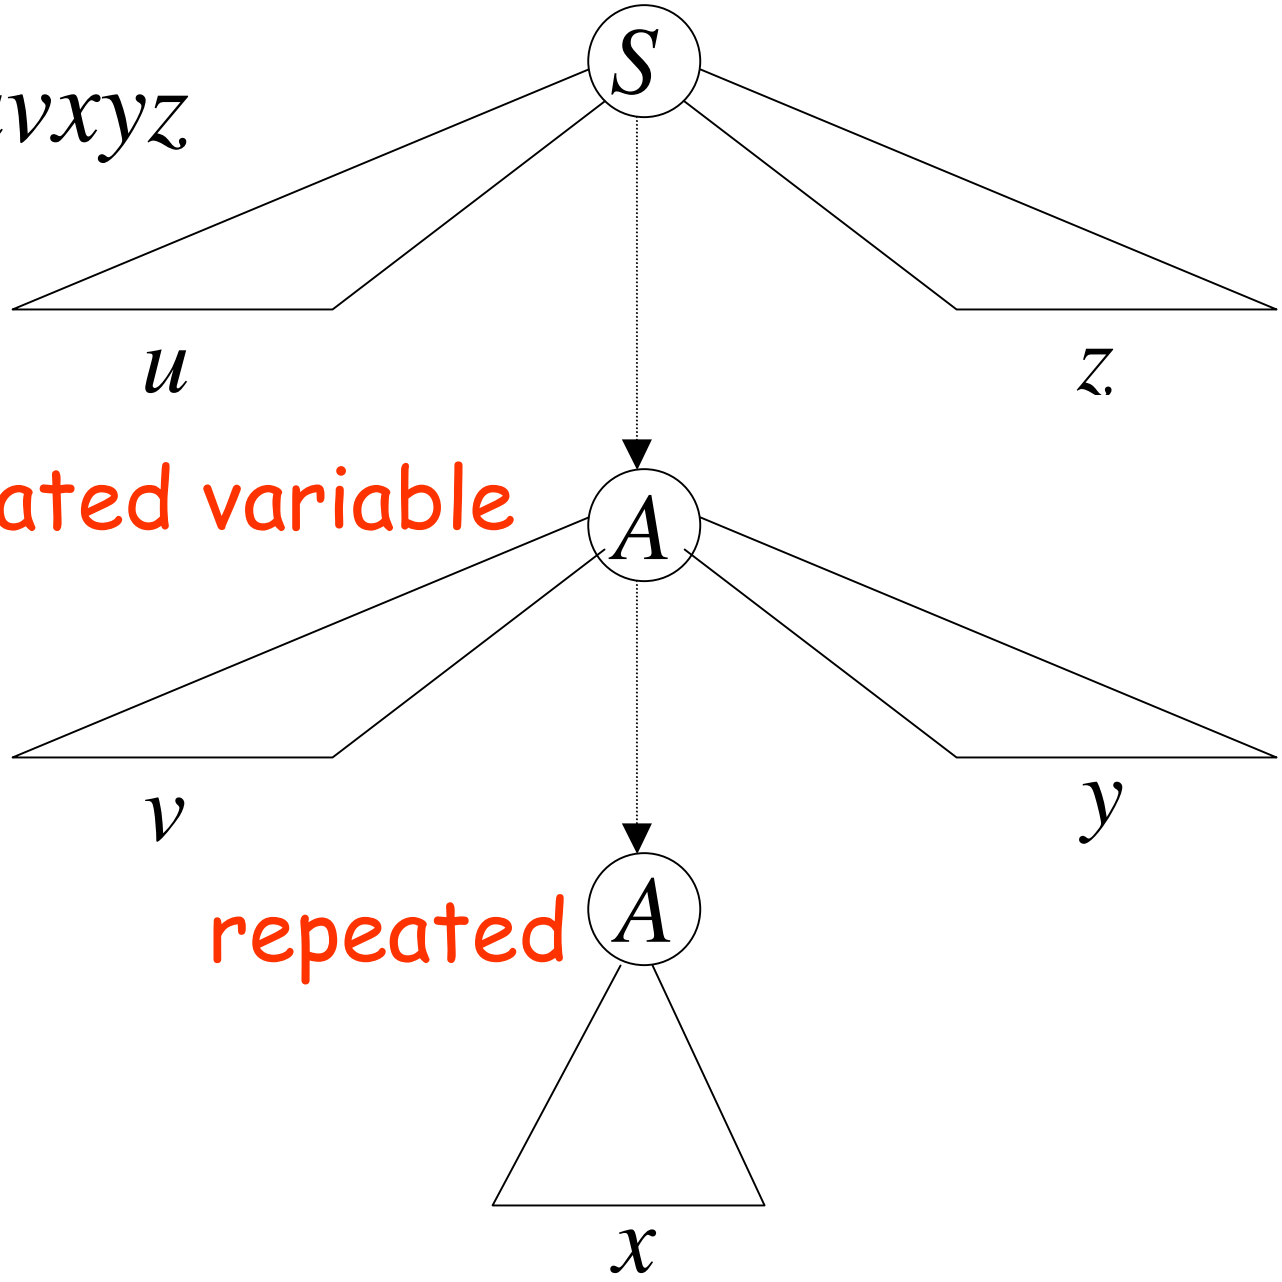

Last repeated variable

repeated

Possible derivations:

$$S \overset{*}{\Rightarrow} uAz$$

$$A \overset{*}{\Rightarrow} vAy$$

$$A \overset{*}{\Rightarrow} x$$

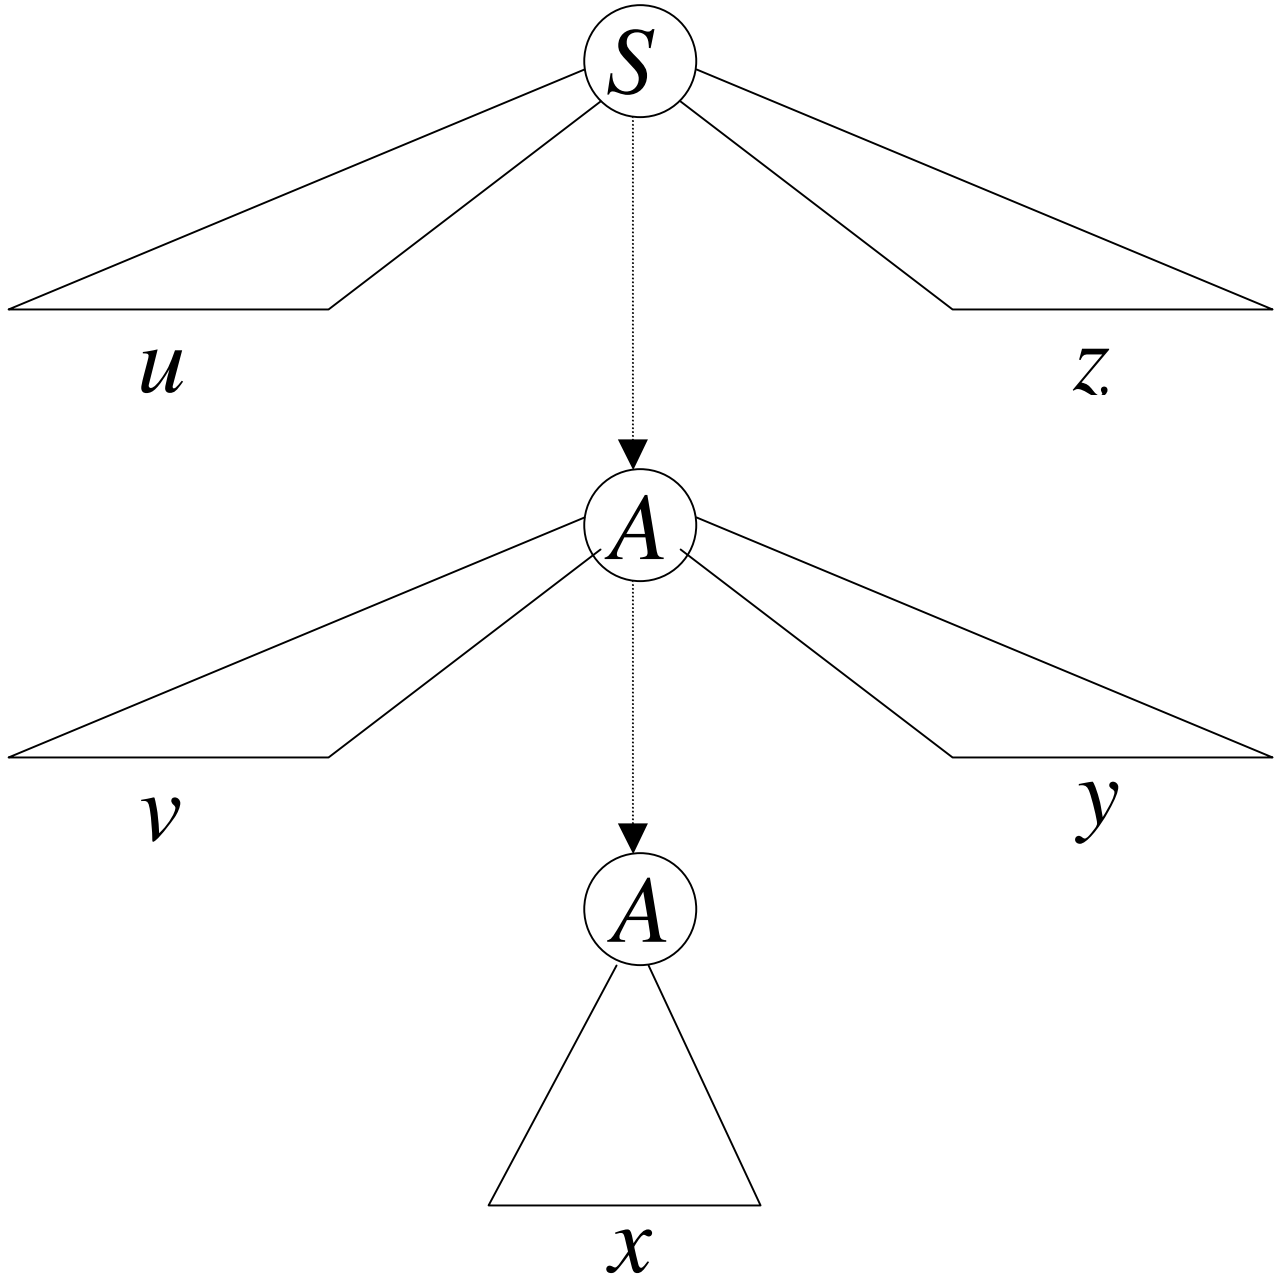

We know:

$$S \overset{*}{\Rightarrow} uAz \qquad A \overset{*}{\Rightarrow} vAy \qquad A \overset{*}{\Rightarrow} x$$

This string is also generated:

$$S \overset{*}{\Rightarrow} uAz \overset{*}{\Rightarrow} uxz$$

$$uv^0xy^0z$$

We know:

$$S \overset{*}{\Rightarrow} uAz \qquad A \overset{*}{\Rightarrow} vAy \qquad A \overset{*}{\Rightarrow} x$$

This string is also generated:

$$S \overset{*}{\Rightarrow} uAz \overset{*}{\Rightarrow} uvAyz \overset{*}{\Rightarrow} uvxyz$$

The original $w = uv^1xy^1z$

We know:

$$S \overset{*}{\Rightarrow} uAz \qquad A \overset{*}{\Rightarrow} vAy \qquad A \overset{*}{\Rightarrow} x$$

This string is also generated:

$$S \overset{*}{\Rightarrow} uAz \overset{*}{\Rightarrow} uvAyz \overset{*}{\Rightarrow} uvvAyyz \overset{*}{\Rightarrow} uvvxyyz$$

$$uv^2xy^2z$$

We know:

$$S \overset{*}{\Rightarrow} uAz \qquad A \overset{*}{\Rightarrow} vAy \qquad A \overset{*}{\Rightarrow} x$$

This string is also generated:

$$S \overset{*}{\Rightarrow} uAz \Rightarrow uvAyz \overset{*}{\Rightarrow} uvvAyyz \overset{*}{\Rightarrow}$$

$$\overset{*}{\Rightarrow} uvvvAyyyz \overset{*}{\Rightarrow} uvvvxyyyz$$

$$uv^3xy^3z$$

We know:

$$S \overset{*}{\Rightarrow} uAz \qquad A \overset{*}{\Rightarrow} vAy \qquad A \overset{*}{\Rightarrow} x$$

This string is also generated:

$$S \overset{*}{\Rightarrow} uAz \overset{*}{\Rightarrow} uvAyz \overset{*}{\Rightarrow} uvvAyyz \overset{*}{\Rightarrow}$$

$$\overset{*}{\Rightarrow} uvvvAyyyz \overset{*}{\Rightarrow} \ldots$$

$$\overset{*}{\Rightarrow} uvvv\cdots vAy\cdots yyyz \overset{*}{\Rightarrow}$$

$$\overset{*}{\Rightarrow} uvvv\cdots vxy\cdots yyyz$$

$$uv^i xy^i z$$

Therefore, any string of the form

$$uv^i xy^i z \qquad i \geq 0$$

is generated by the grammar G

Therefore,

knowing that $uvxyz \in L(G)$

we also know that $uv^i xy^i z \in L(G)$

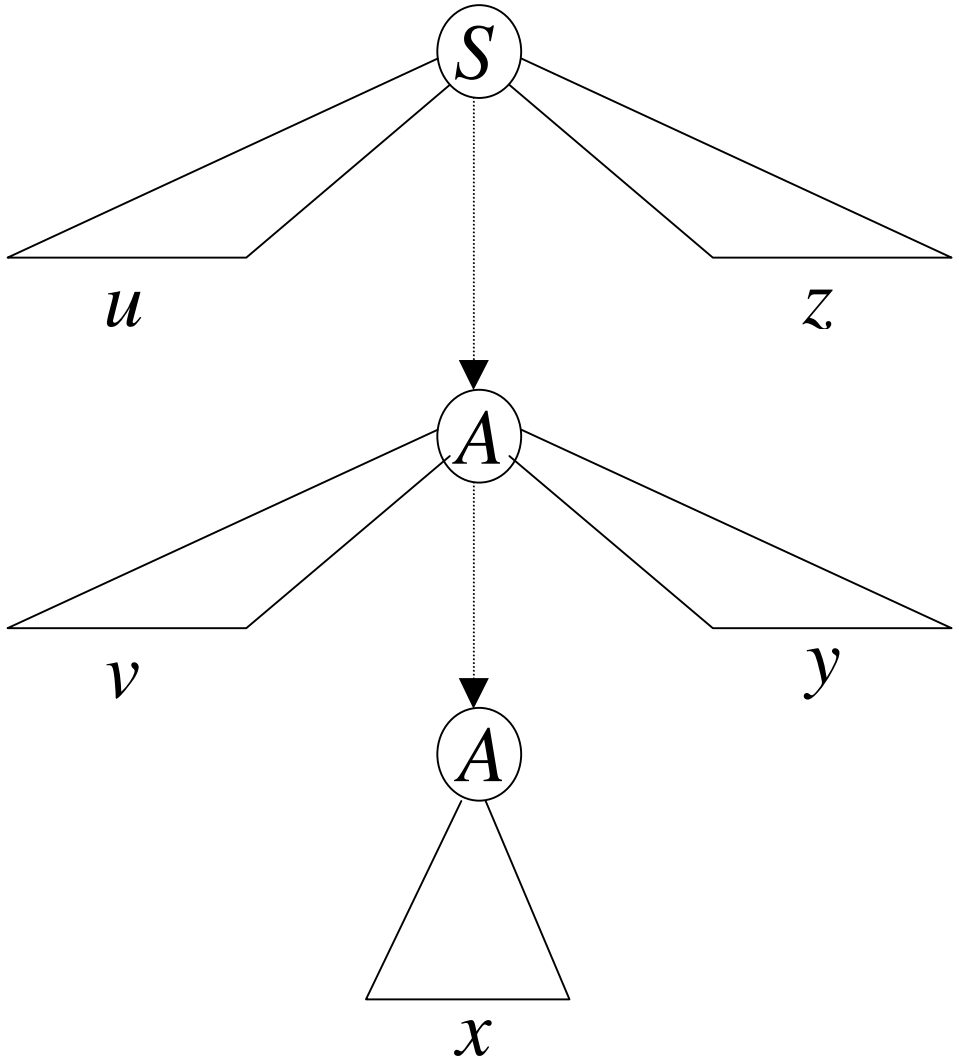

Observation: $|vxy| \leq m$

Since A is the last repeated variable

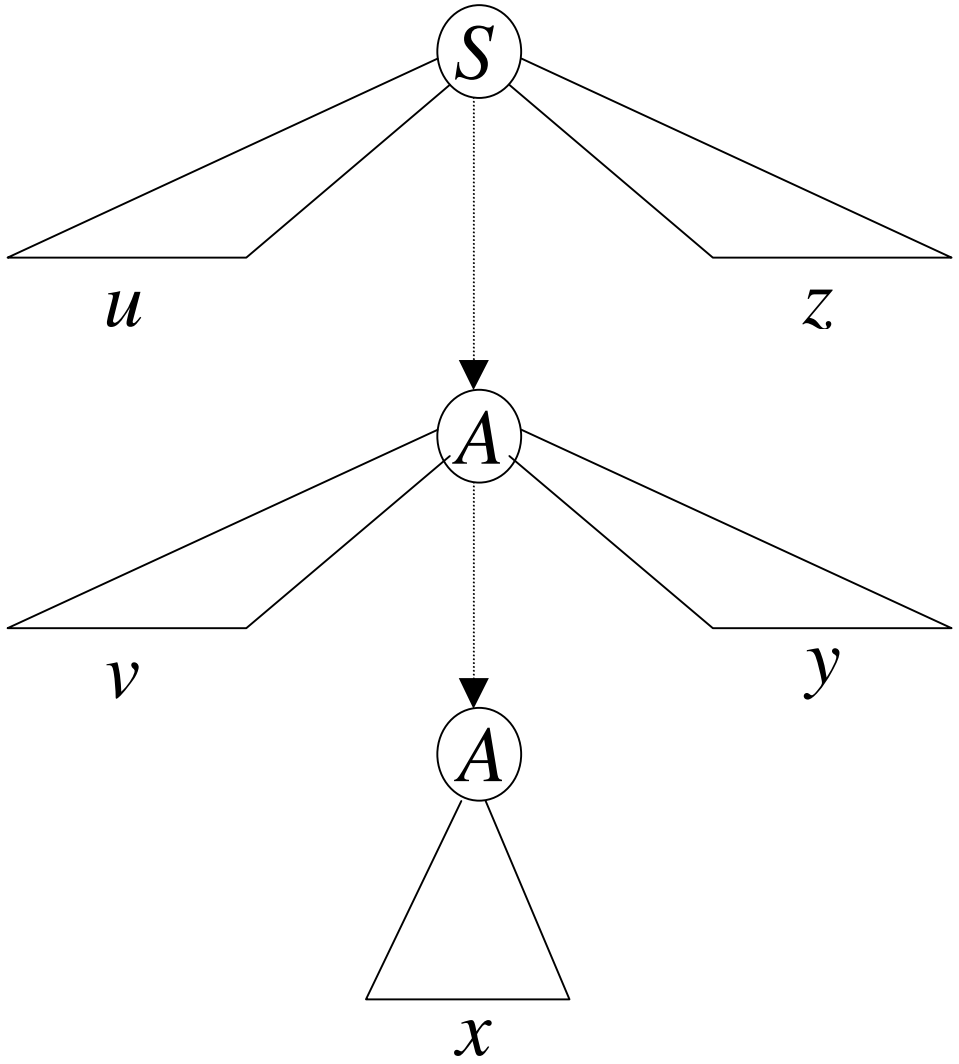

Observation: $|vy| \geq 1$

Since there are no unit or λ productions

The Pumping Lemma:

For infinite context-free language L

there exists an integer m such that

for any string $w \in L, \quad |w| \geq m$

we can write $w = uvxyz$

with lengths $|vxy| \leq m$ and $|vy| \geq 1$

and it must be:

$$uv^i xy^i z \in L, \quad \text{for all } i \geq 0$$

Applications of The Pumping Lemma

Non-context free languages

$$\{a^n b^n c^n : n \geq 0\}$$

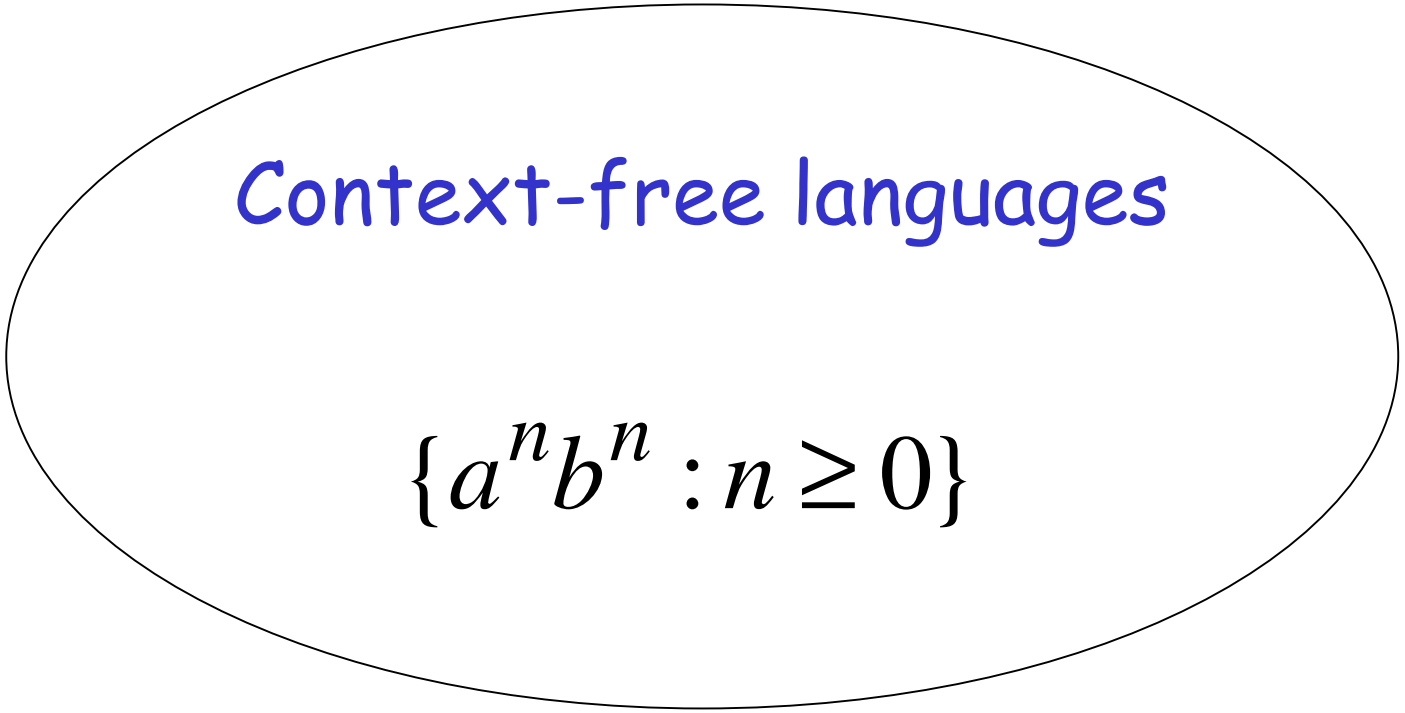

Theorem: The language

$$L = \{a^n b^n c^n : n \geq 0\}$$

is **not** context free

Proof: Use the Pumping Lemma for context-free languages

$$L = \{a^n b^n c^n : n \geq 0\}$$

Assume for contradiction that L

is context-free

Since L is context-free and infinite

we can apply the pumping lemma

$$L = \{a^n b^n c^n : n \geq 0\}$$

Pumping Lemma gives a magic number m such that:

Pick any string $w \in L$ with length $|w| \geq m$

We pick: $w = a^m b^m c^m$

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

We can write: $w = uvxyz$

with lengths $|vxy| \leq m$ and $|vy| \geq 1$

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Pumping Lemma says:

$$uv^i xy^i z \in L \quad \text{for all} \quad i \geq 0$$

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

We examine **all** the possible locations of string vxy in w

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 1: vxy is within a^m

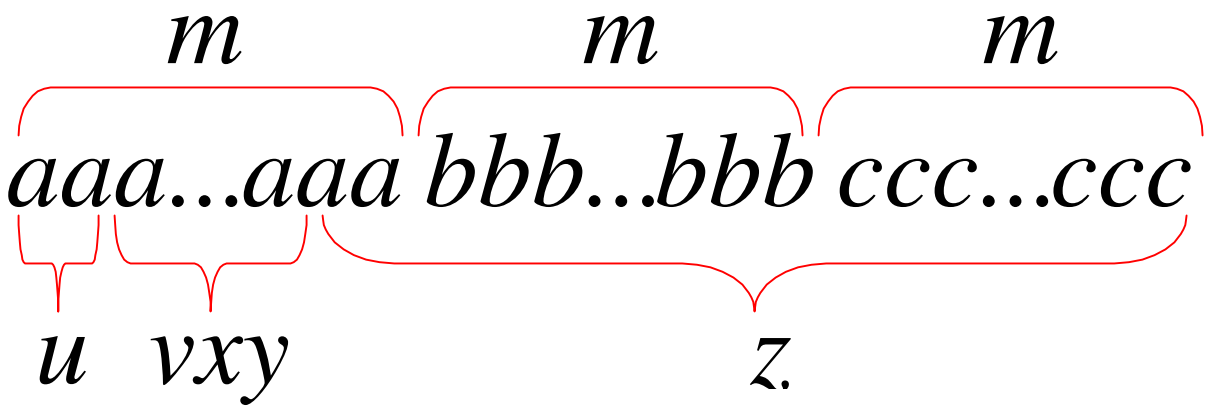

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 1: v and y consist from only a

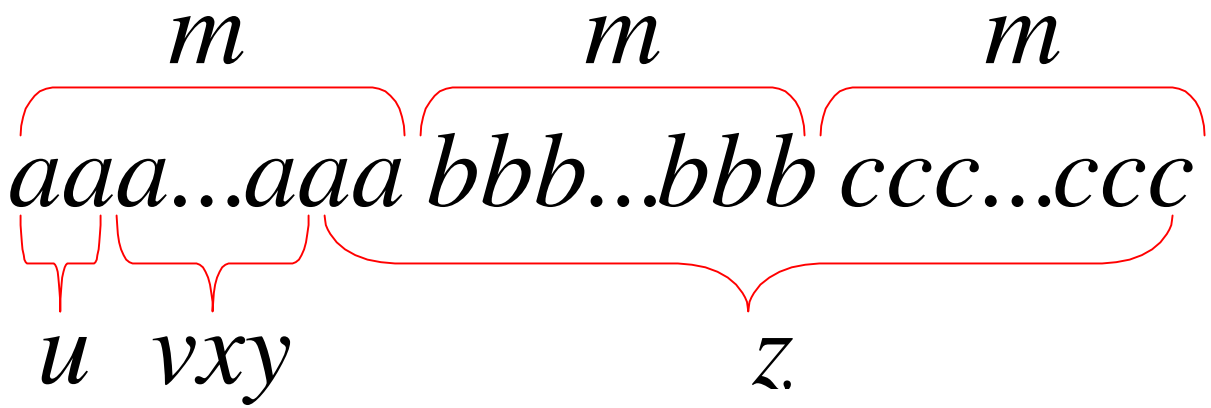

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 1: Repeating v and y

$$k \geq 1$$

$$\overbrace{aaaaaa...aaaaaa}^{m+k}\overbrace{bbb...bbb}^{m}\overbrace{ccc...ccc}^{m}$$

$$u \qquad v^2 xy^2 \qquad z$$

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 1: From Pumping Lemma: $uv^2xy^2z \in L$

$$k \geq 1$$

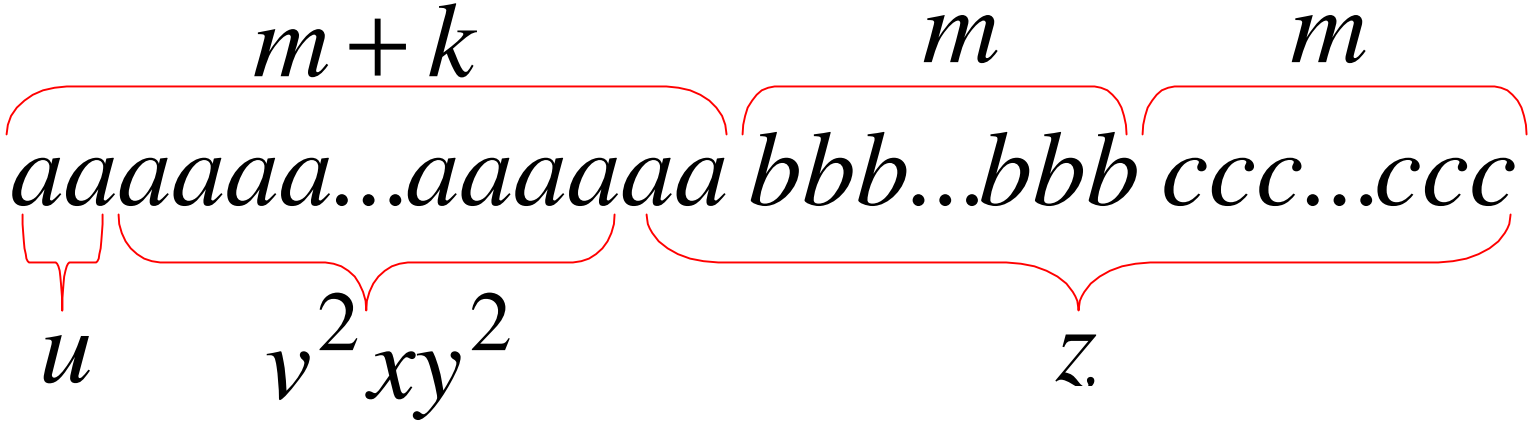

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 1: From Pumping Lemma: $uv^2xy^2z \in L$

$$k \geq 1$$

However: $uv^2xy^2z = a^{m+k}b^m c^m \notin L$

Contradiction!!!

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 2: vxy is within b^m

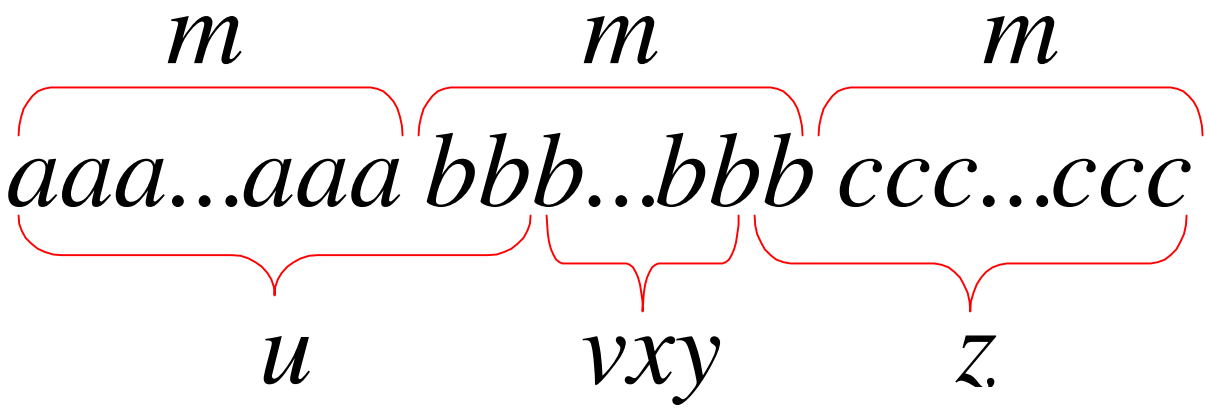

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 2: Similar analysis with case 1

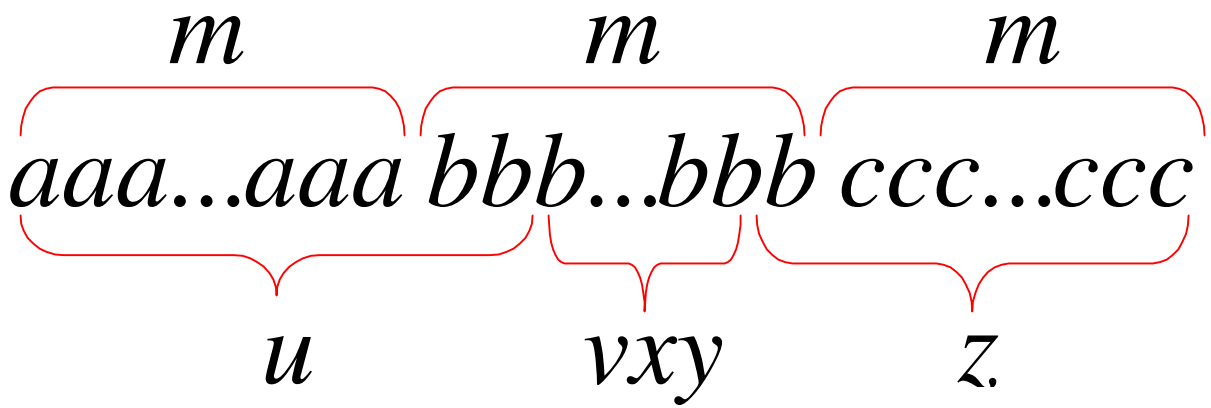

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 3: vxy is within c^m

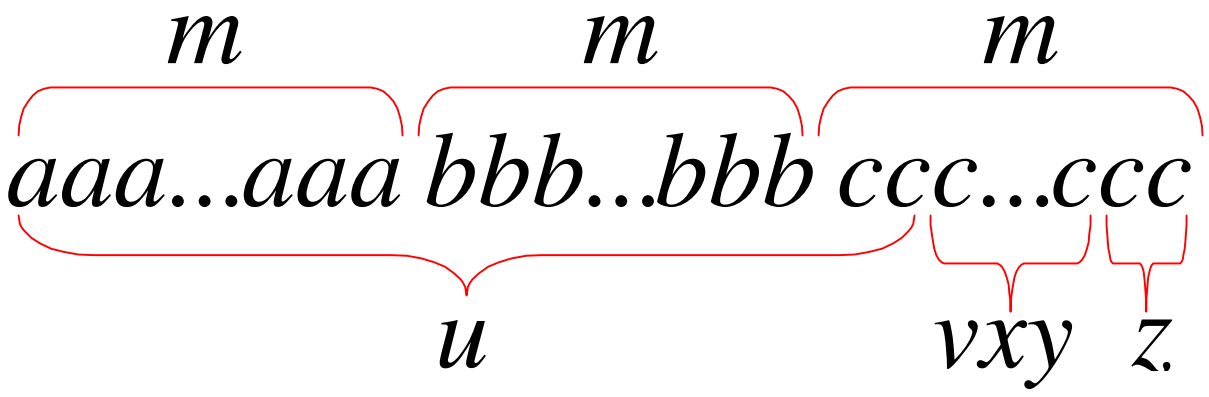

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 3: Similar analysis with case 1

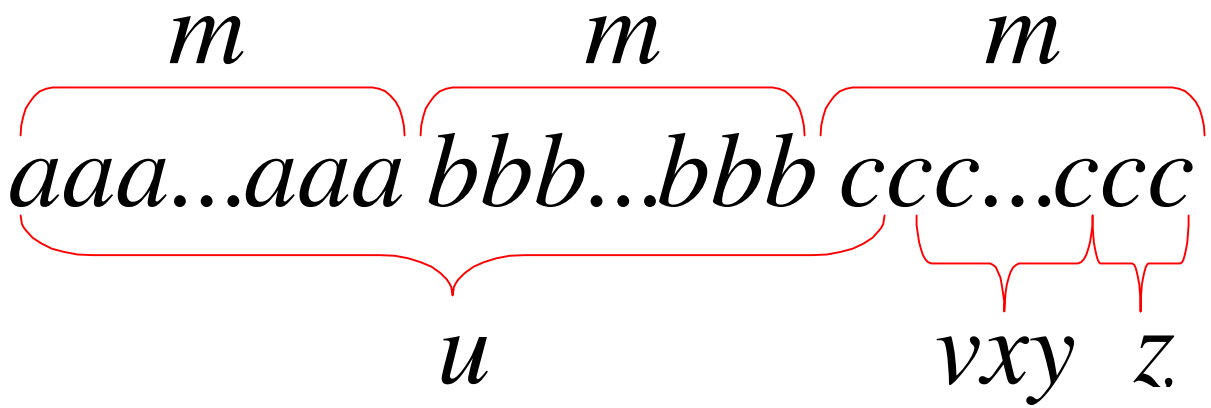

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: vxy overlaps a^m and b^m

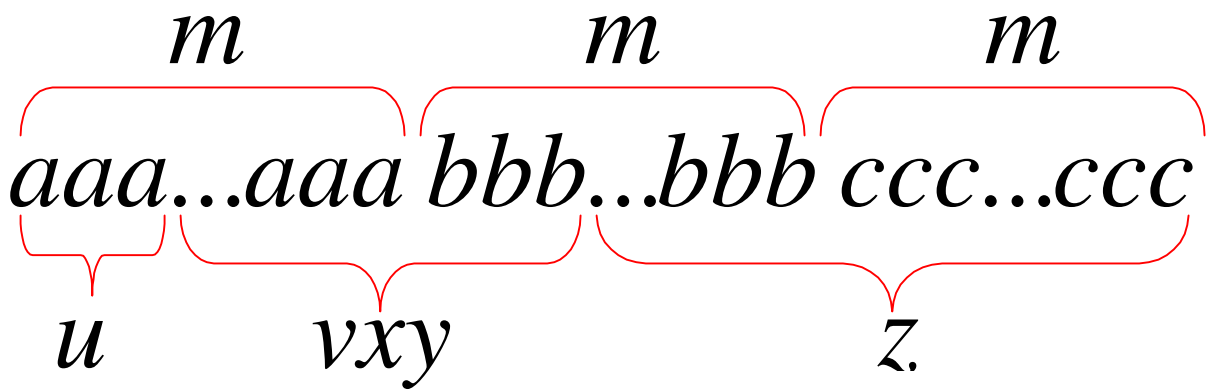

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: Possibility 1: v contains only a

y contains only b

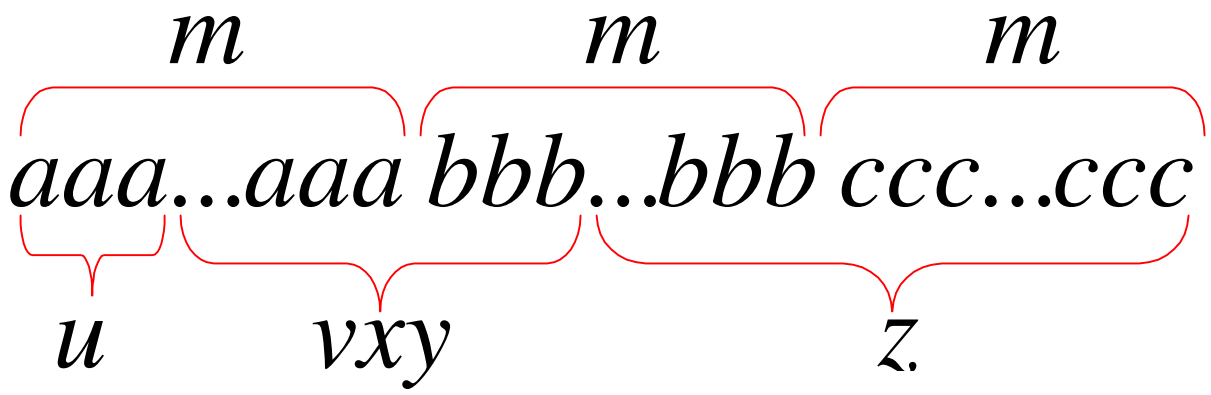

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: Possibility 1: v contains only a

y contains only b

$$k_1 + k_2 \geq 1$$

$$\overbrace{aaa...a}^{m+k_1}\overbrace{aaaaaaa\ bbbbbbb...bbb}^{m+k_2}\overbrace{ccc...ccc}^{m}$$

u $\quad v^2xy^2$ $\quad z$

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: From Pumping Lemma: $uv^2xy^2z \in L$

$$k_1 + k_2 \geq 1$$

$$\overbrace{aaa...a}^{m+k_1}\overbrace{aaaaaaa}^{}\overbrace{bbbbbbb...bbb}^{m+k_2}\overbrace{ccc...ccc}^{m}$$

u $\qquad$ v^2xy^2 $\qquad$ z

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: From Pumping Lemma: $uv^2xy^2z \in L$

$$k_1 + k_2 \geq 1$$

However: $uv^2xy^2z = a^{m+k_1} b^{m+k_2} c^m \notin L$

Contradiction!!!

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: Possibility 2: v contains a and b

y contains only b

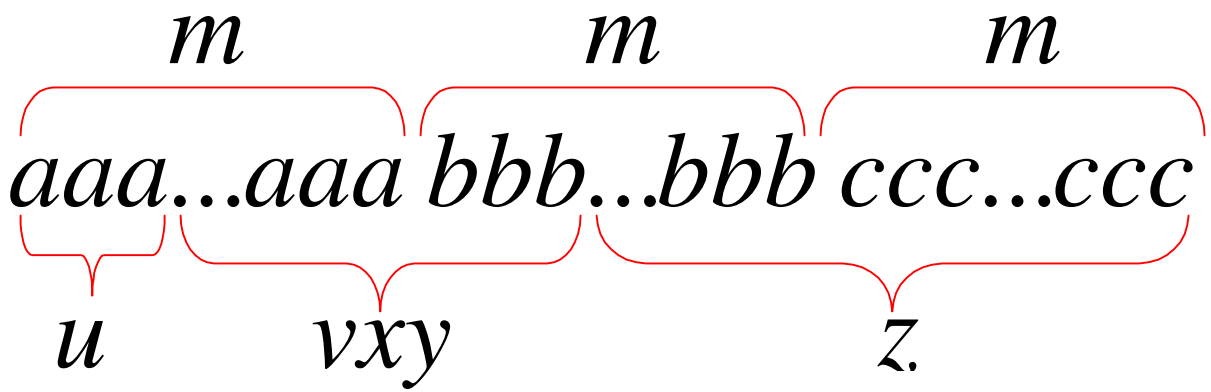

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: Possibility 2: v contains a and b

$k_1 + k_2 + k \geq 1$ $\qquad$ y contains only b

$$\overbrace{aaa\ldots aaaaa}^{m}\overbrace{bb}^{k_1}\overbrace{aa}^{k_2}\overbrace{bb\,bbbbbbb\ldots bbb}^{m+k}\overbrace{ccc\ldots ccc}^{m}$$

$$\underbrace{aaa}_{u}\underbrace{\ldots aaaaabbaabb\,bbbbbbb}_{v^2xy^2}\underbrace{\ldots bbb\,ccc\ldots ccc}_{z}$$

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: From Pumping Lemma: $uv^2xy^2z \in L$

$$k_1 + k_2 + k \geq 1$$

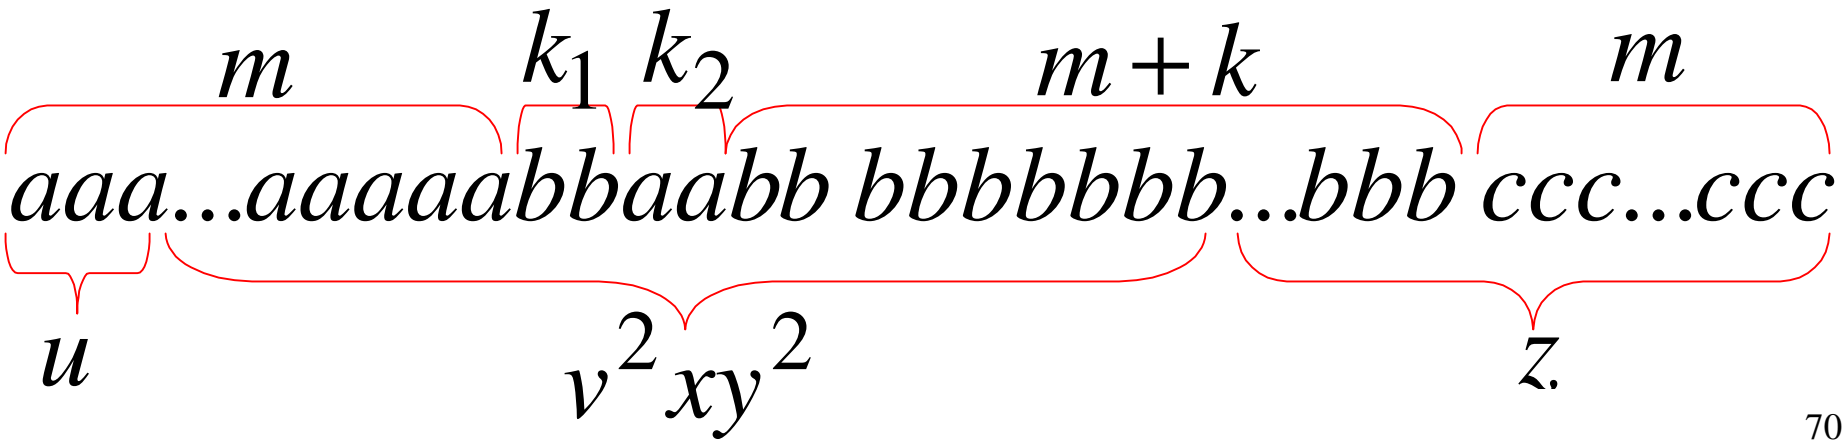

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: From Pumping Lemma: $uv^2xy^2z \in L$

However: $k_1 + k_2 + k \geq 1$

$$uv^2xy^2z = a^m b^{k_1} a^{k_2} b^{m+k} c^m \notin L$$

Contradiction!!!

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: Possibility 3: v contains only a

y contains a and b

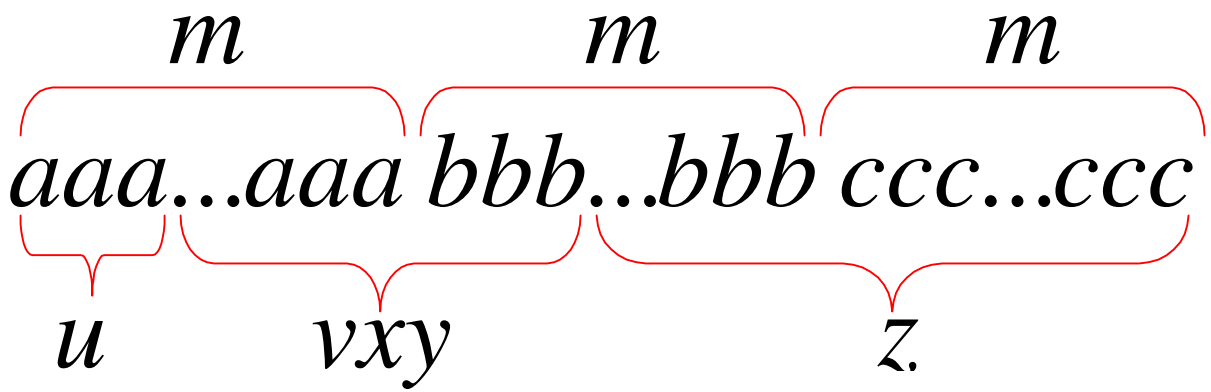

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 4: Possibility 3: v contains only a

y contains a and b

Similar analysis with Possibility 2

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 5: vxy overlaps b^m and c^m

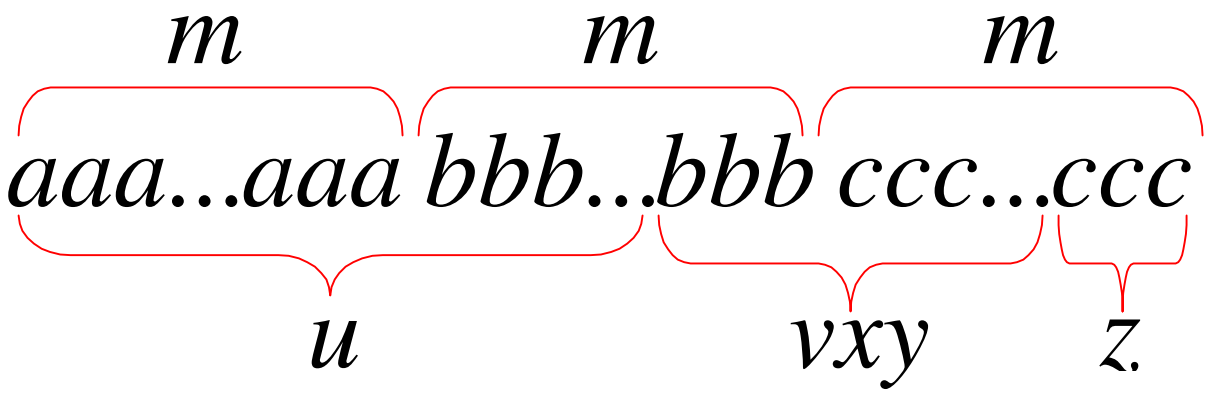

$$L = \{a^n b^n c^n : n \geq 0\}$$

$$w = a^m b^m c^m$$

$$w = uvxyz \qquad |vxy| \leq m \qquad |vy| \geq 1$$

Case 5: Similar analysis with case 4

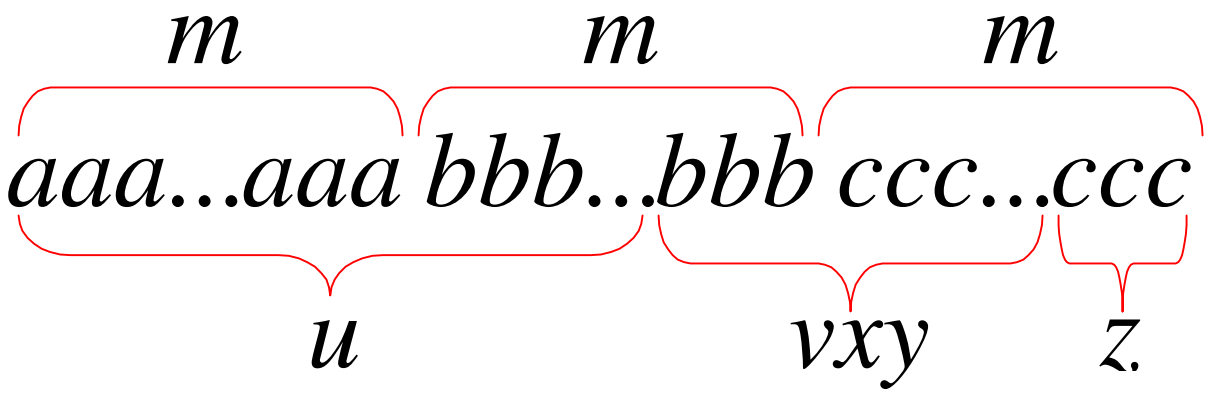

There are no other cases to consider

(since $|vxy| \leq m$, string vxy cannot

overlap a^m, b^m and c^m at the same time)

In all cases we obtained a contradiction

Therefore: The original assumption that

$$L = \{a^n b^n c^n : n \geq 0\}$$

is context-free must be wrong

Conclusion: L is not context-free