Recursively Enumerable and Recursive Languages

Definition:

A language is **recursively enumerable** if some Turing machine accepts it

Let L be a recursively enumerable language

and M the Turing Machine that accepts it

For string w :

if $w \in L$ then M halts in a final state

if $w \notin L$ then M halts in a non-final state

or loops forever

Definition:

A language is **recursive**
if some Turing machine accepts it
and halts on any input string

In other words:

A language is recursive if there is
a membership algorithm for it

Let L be a recursive language

and M the Turing Machine that accepts it

For string w :

if $w \in L$ then M halts in a final state

if $w \notin L$ then M halts in a non-final state

We will prove:

1. There is a specific language
   which is not recursively enumerable
   (not accepted by any Turing Machine)

2. There is a specific language
   which is recursively enumerable
   but not recursive

Non Recursively Enumerable

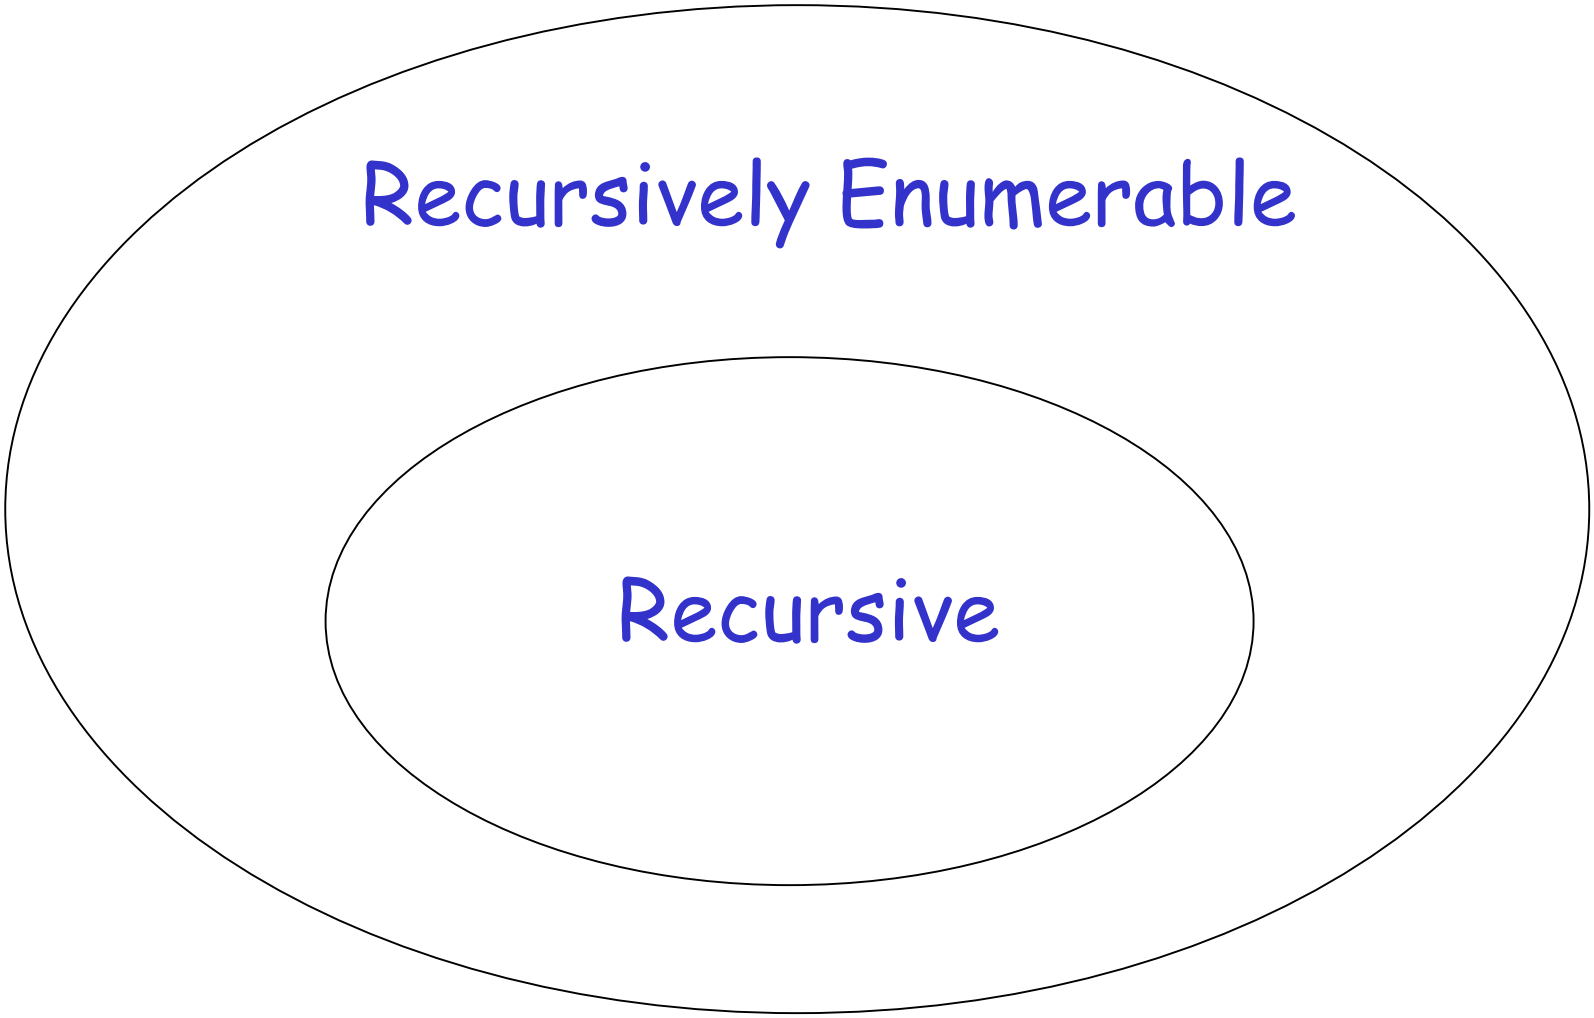

We will first prove:

- If a language is recursive then
  there is an enumeration procedure for it

- A language is recursively enumerable
  if and only if
  there is an enumeration procedure for it

Theorem:

if a language L is recursive then

there is an enumeration procedure for it

Proof:

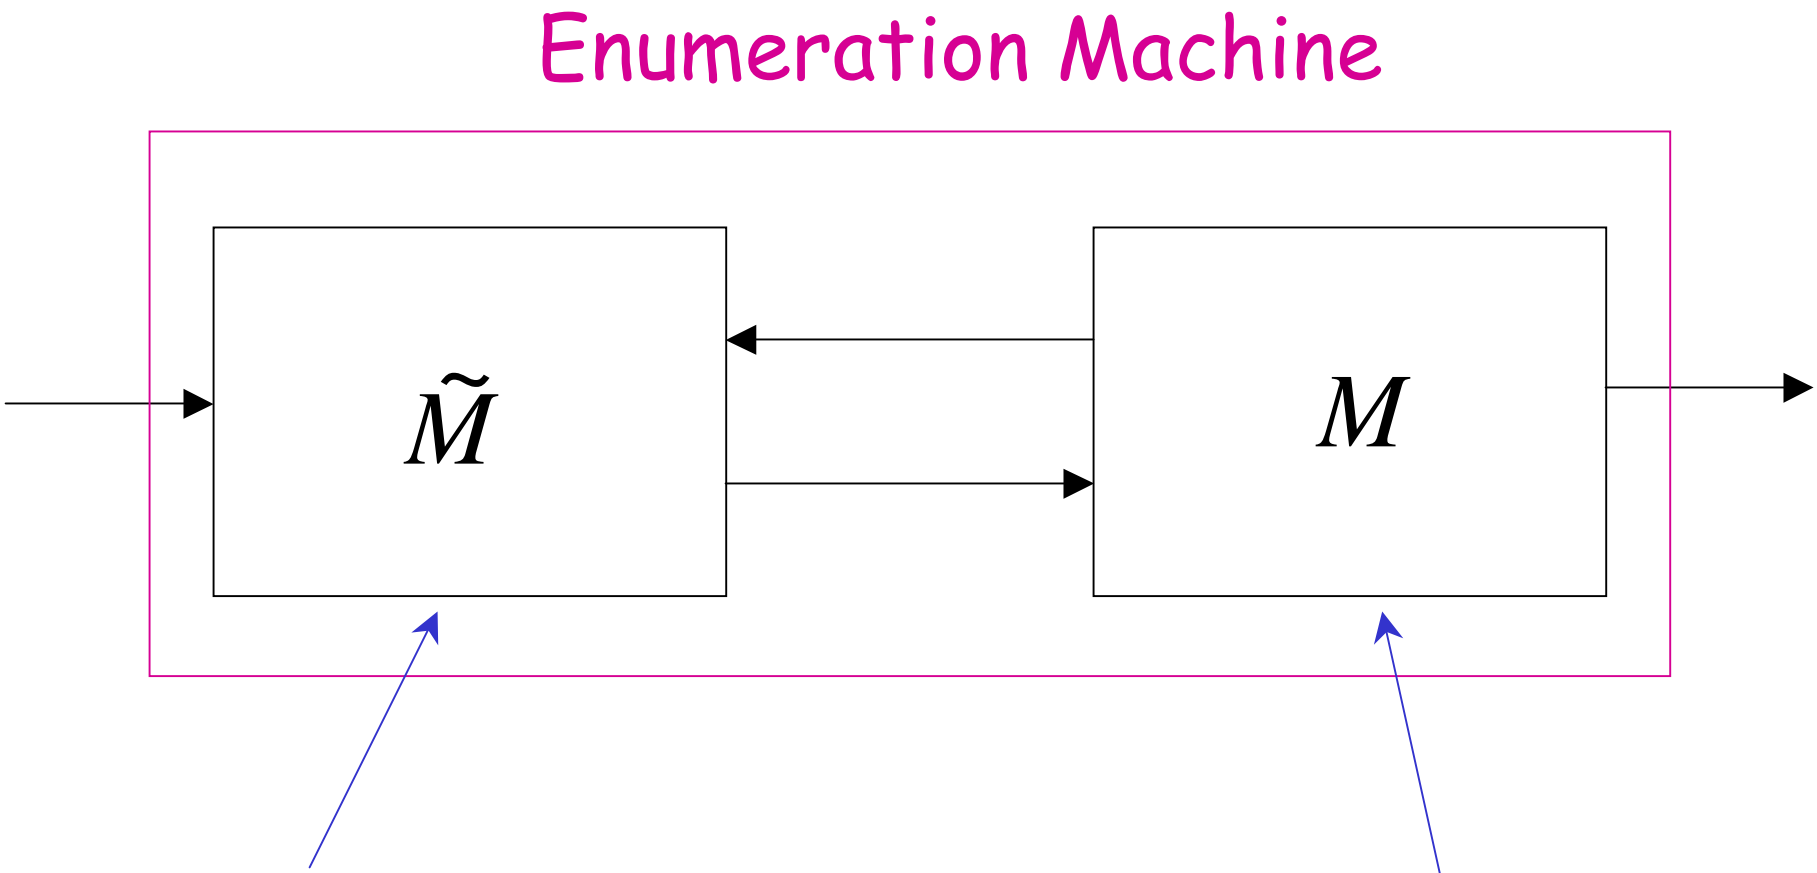
Enumeration Machine
$\tilde{M}$
M
Enumerates all
strings of input alphabet
Accepts L

If the alphabet is $\{a,b\}$ then

$\tilde{M}$ can enumerate strings as follows:

a
b
aa
ab
ba
bb
aaa
aab
.....

Enumeration procedure

Repeat:

$\tilde{M}$ generates a string w

M checks if $w \in L$

YES: print w to output

NO: ignore w

End of Proof

Example: $L = \{b, ab, bb, aaa, ...\}$

$\tilde{M}$	$L(M)$	Enumeration Output
a		
b	b	b
aa		
ab	ab	ab
ba		
bb	bb	bb
aaa	aaa	aaa
aab		
.....	.....	.....

Theorem:

if language L is recursively enumerable then there is an enumeration procedure for it

Proof:

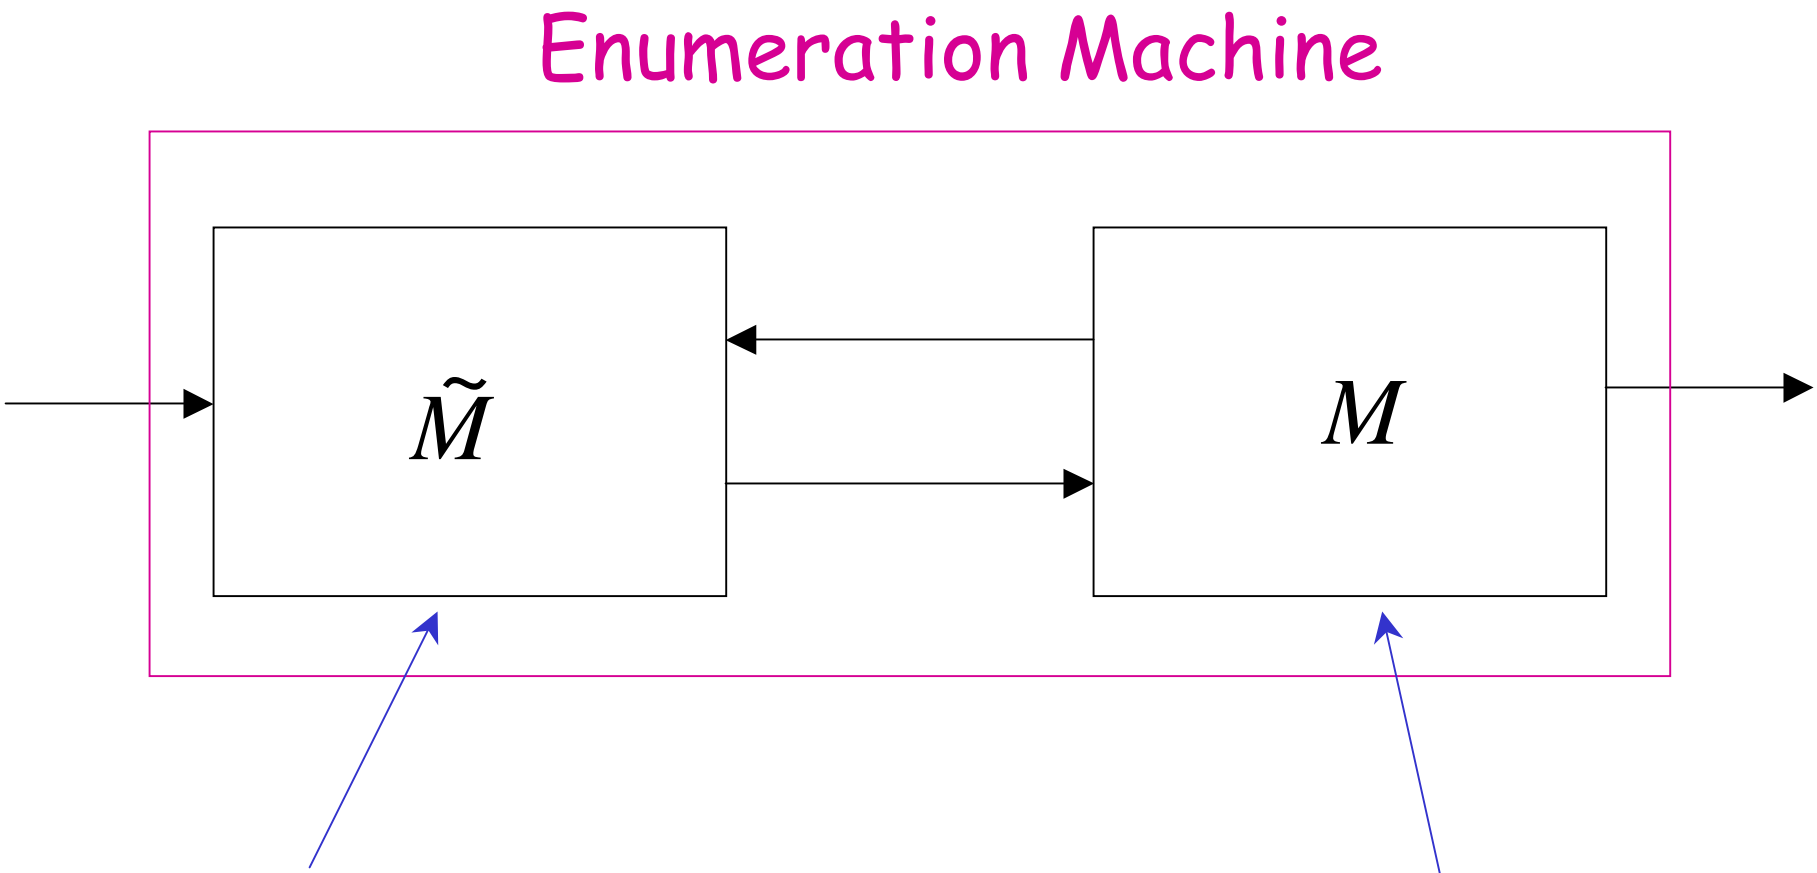
Enumeration Machine
$\tilde{M}$
M
Enumerates all
strings of input alphabet
Accepts L

If the alphabet is $\{a,b\}$ then

$\tilde{M}$ can enumerate strings as follows:

a

b

aa

ab

ba

bb

aaa

aab

NAIVE APPROACH

Enumeration procedure

Repeat: $\tilde{M}$ generates a string w

M checks if $w \in L$

YES: print w to output

NO: ignore w

Problem: If $w \notin L$

machine M may loop forever

BETTER APPROACH

$\tilde{M}$ Generates first string w_1

M executes first step on w_1

$\tilde{M}$ Generates second string w_2

M executes first step on w_2

second step on w_1

$\tilde{M}$ Generates third string w_3

M executes first step on w_3

second step on w_2

third step on w_1

And so on.....

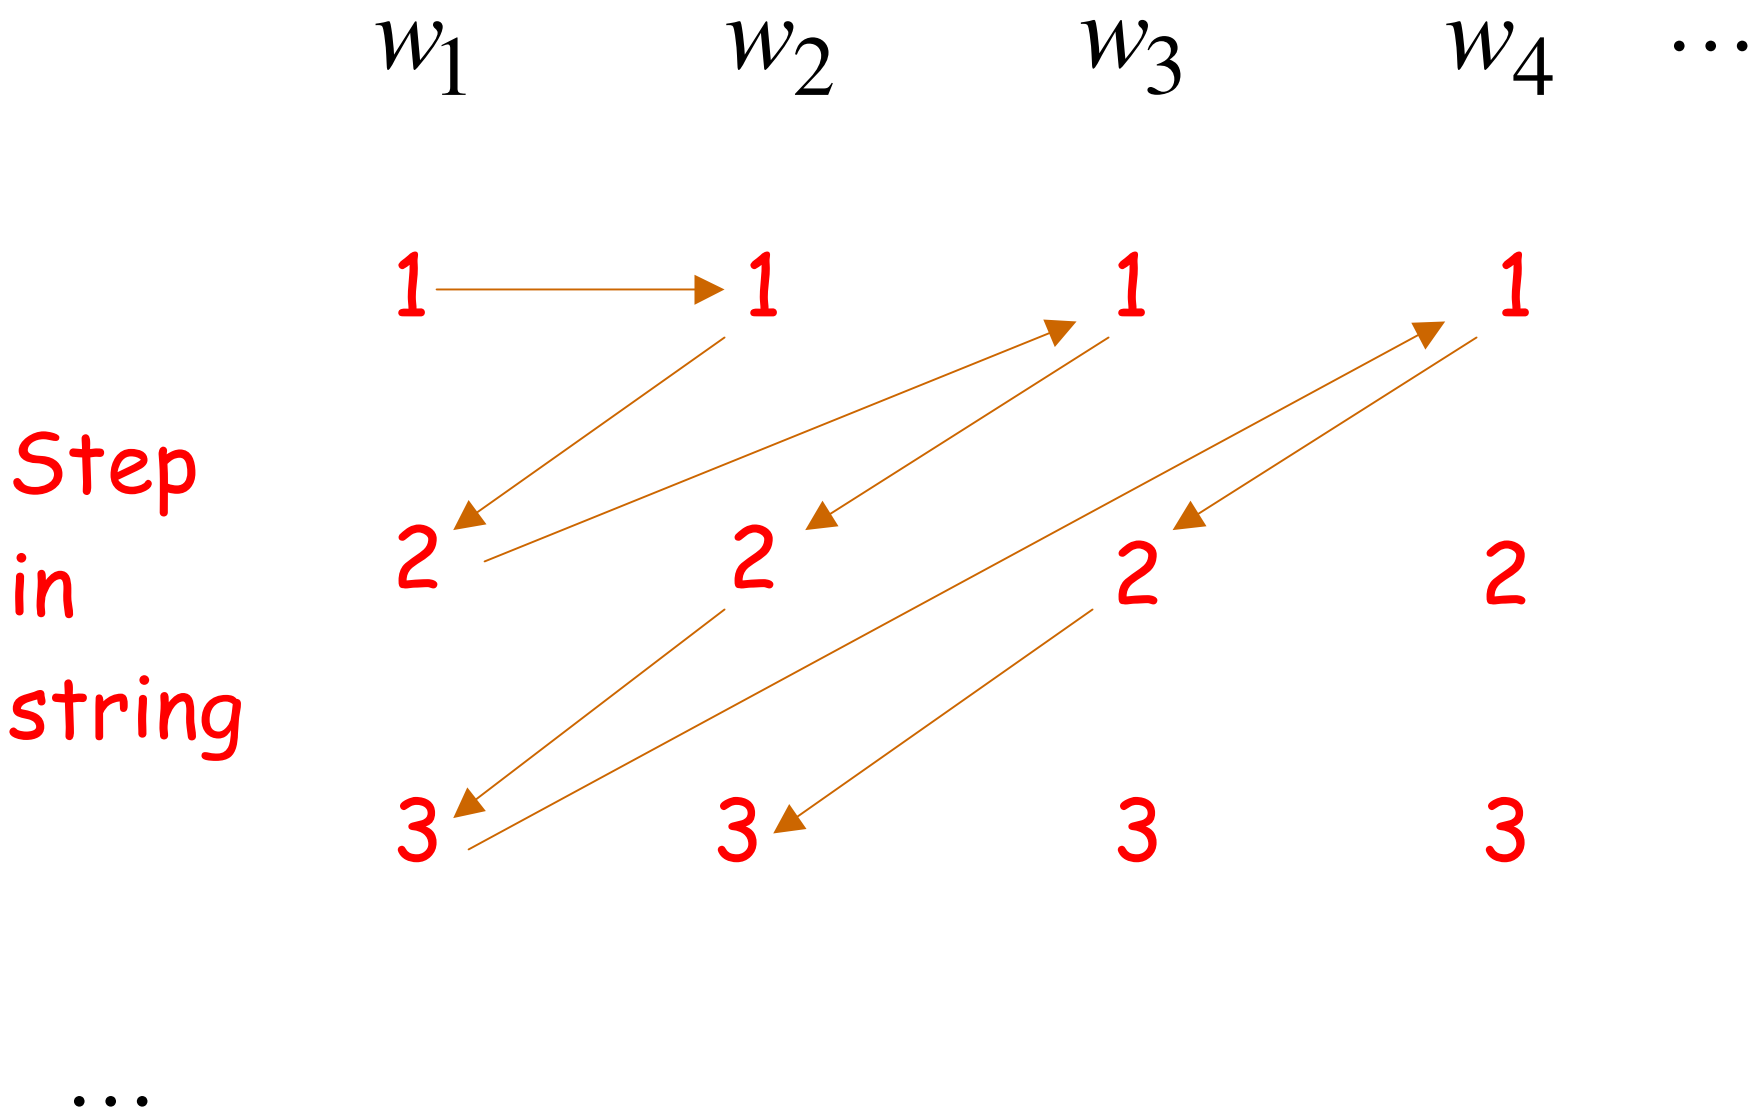
w_1
w_2
w_3
w_4
$\cdots$
Step in string
1
1
1
1
2
2
2
2
3
3
3
3
$\cdots$

If for any string w_i
machine M halts in a final state
then it prints w_i on the output

End of Proof

Theorem:

If for language L

there is an enumeration procedure

then L is recursively enumerable

Proof:

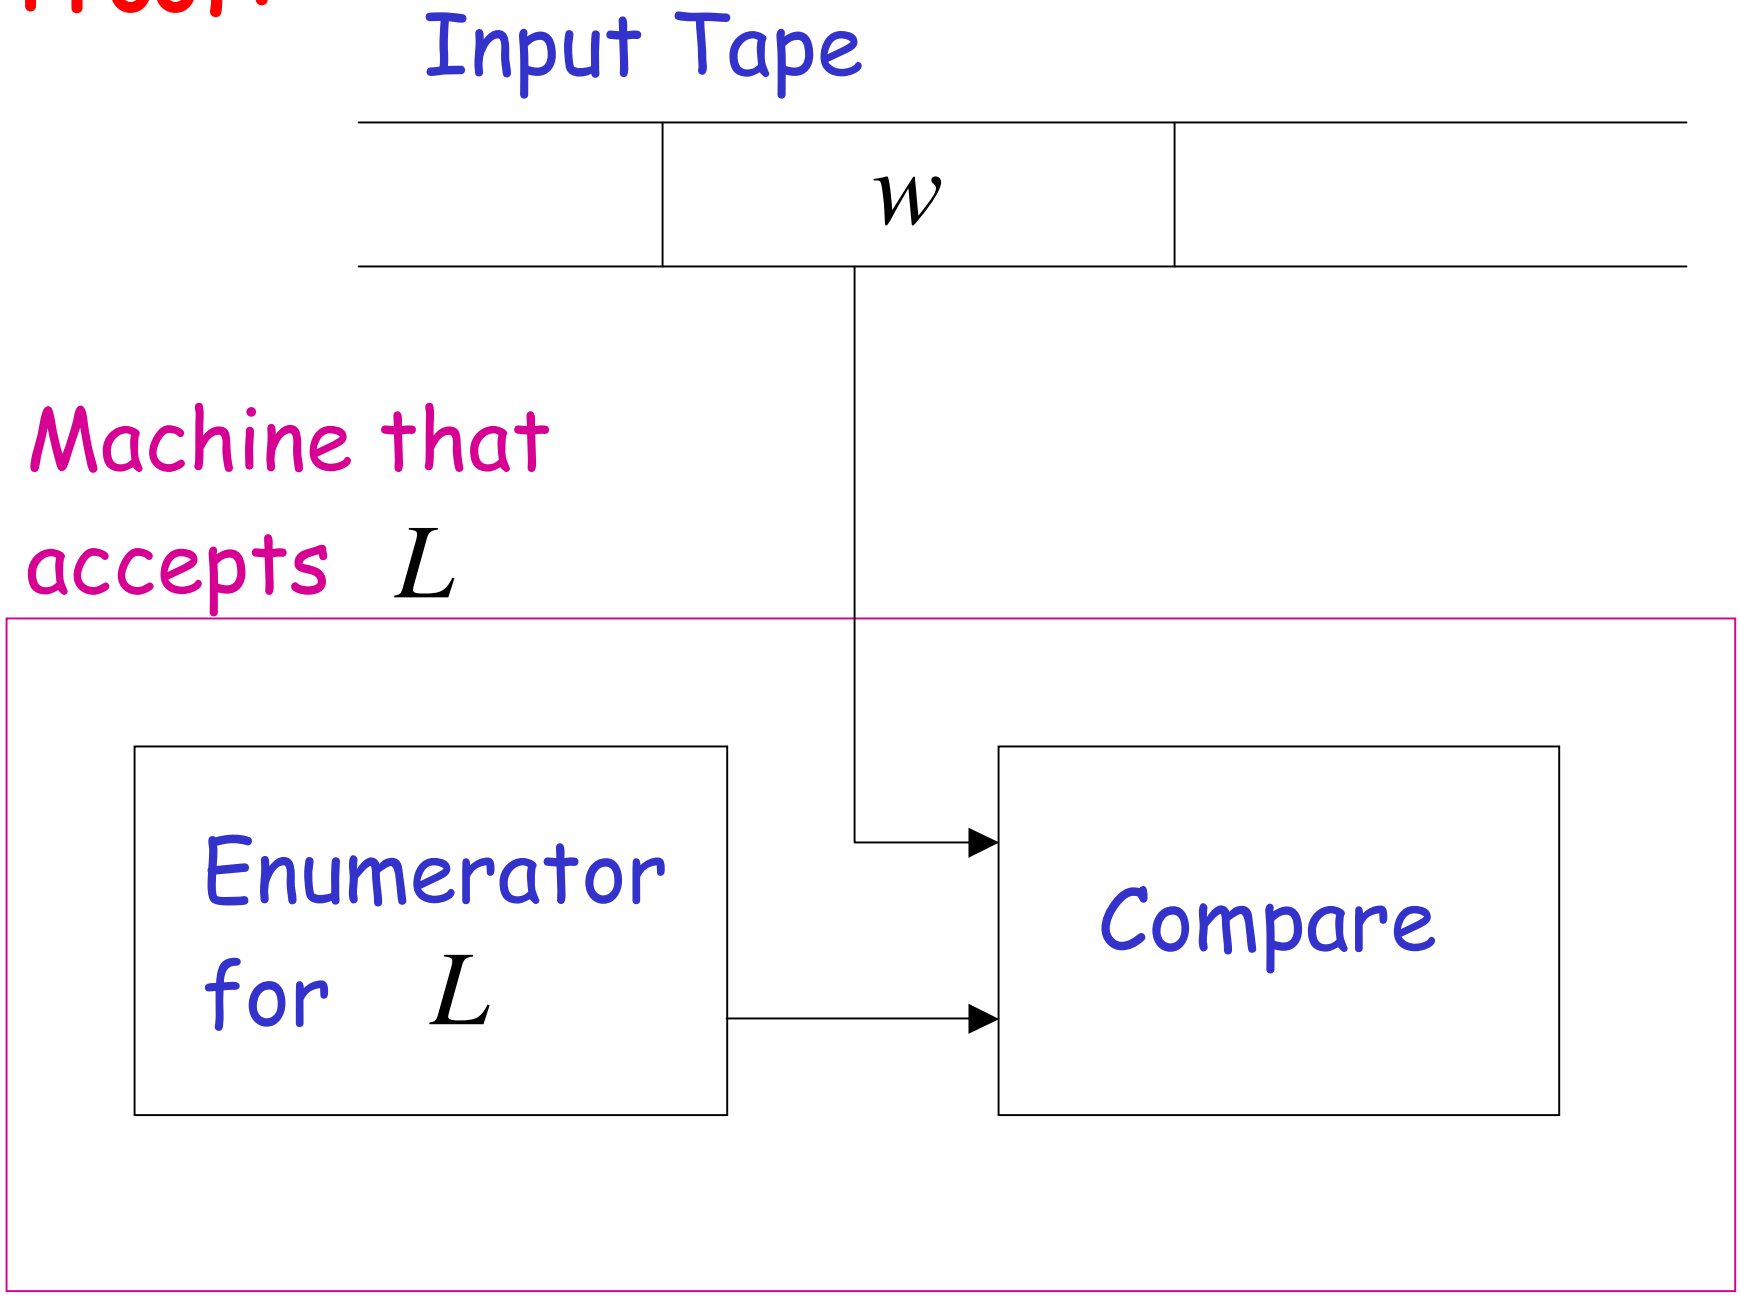
Input Tape
w
Machine that accepts L
Enumerator for L
Compare

Turing machine that accepts L

For input string w

Repeat:

- Using the enumerator, generate the next string of L
- Compare generated string with w

  If same, accept and exit loop

End of Proof

We have proven:

A language is recursively enumerable
if and only if
there is an enumeration procedure for it

A Language which is not Recursively Enumerable

We want to find a language that is not Recursively Enumerable

This language is not accepted by any Turing Machine

Consider alphabet $\{a\}$

Strings: $a,\ aa,\ aaa,\ aaaa,\ \ldots$

$a^1\ \ a^2\ \ a^3\ \ a^4\ \ \ldots$

Consider Turing Machines
that accept languages over alphabet $\{a\}$

They are countable:

$$M_1,\ M_2,\ M_3,\ M_4,\ \ldots$$

Example language accepted by M_i

$$L(M_i) = \{aa, aaaa, aaaaaa\}$$

$$L(M_i) = \{a^2, a^4, a^6\}$$

Alternative representation

	a^1	a^2	a^3	a^4	a^5	a^6	a^7	$\cdots$
$L(M_i)$	0	1	0	1	0	1	0	$\cdots$

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

Consider the language

$$L = \{a^i : a^i \in L(M_i)\}$$

L consists from the 1's in the diagonal

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

$$L = \{a^3, a^4, \ldots\}$$

Consider the language $\overline{L}$

$$L = \{a^i : a^i \in L(M_i)\}$$

$$\overline{L} = \{a^i : a^i \notin L(M_i)\}$$

$\overline{L}$ consists from the 0's in the diagonal

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

$$\overline{L} = \{a^1, a^2, \ldots\}$$

Theorem:

Language $\overline{L}$ is not recursively enumerable

Proof:

Assume for contradiction that

$\overline{L}$ is recursively enumerable

There must exist some machine M_k that accepts $\overline{L}$

$$L(M_k) = \overline{L}$$

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

Question: $M_k = M_1$?

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

Answer: $M_k \neq M_1$

$a^1 \in L(M_k)$

$a^1 \notin L(M_1)$

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

Question: $M_k = M_2$?

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

Answer: $M_k \neq M_2$

$a^2 \in L(M_k)$

$a^2 \notin L(M_2)$

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

Question: $M_k = M_3$?

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

Answer: $M_k \neq M_3$

$a^3 \notin L(M_k)$

$a^3 \in L(M_3)$

Similarly: $M_k \neq M_i$ for any i

Because either:

$$a^i \in L(M_k) \quad \text{and} \quad a^i \notin L(M_i)$$

or

$$a^i \notin L(M_k) \quad \text{and} \quad a^i \in L(M_i)$$

Therefore, the machine M_k cannot exist

Therefore, the language $\overline{L}$
is not recursively enumerable

End of Proof

Observation:

There is no algorithm that describes $\overline{L}$

(otherwise $\overline{L}$ would be accepted by some Turing Machine)

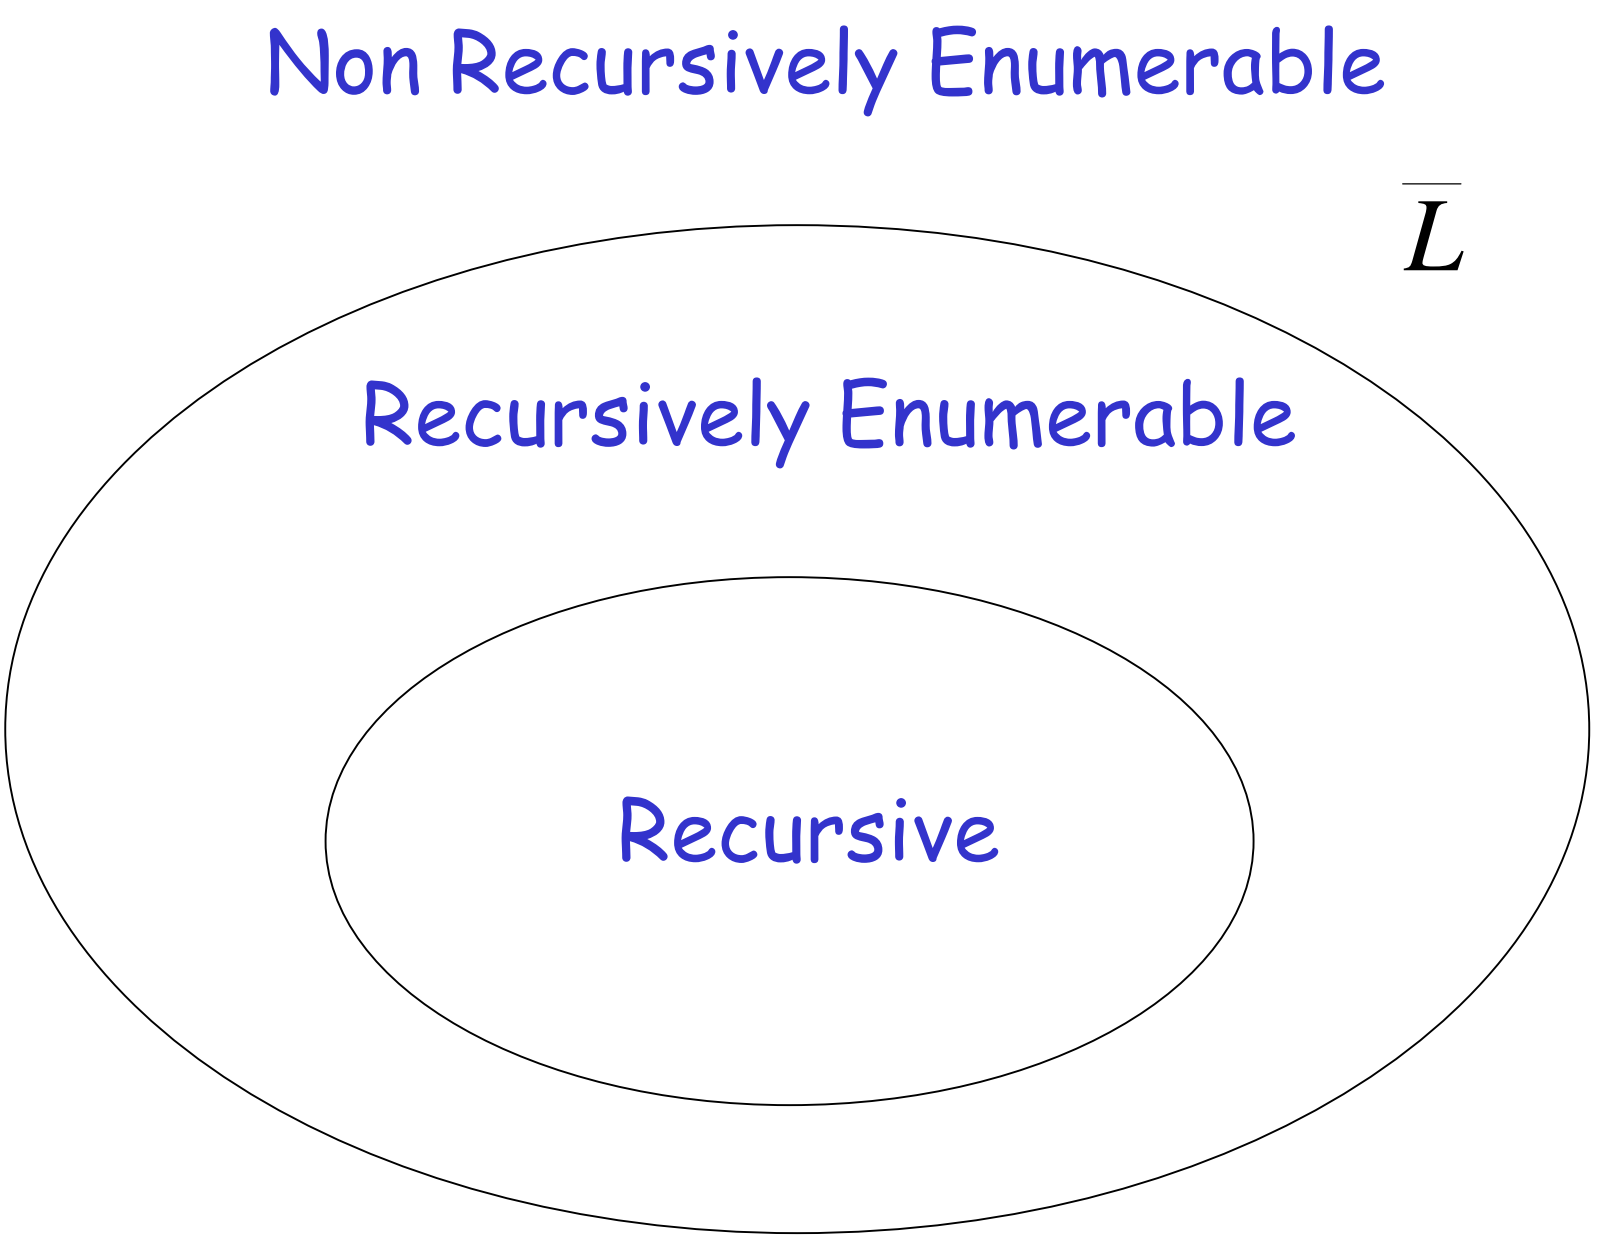
Non Recursively Enumerable
$\overline{L}$
Recursively Enumerable
Recursive

A Language which is Recursively Enumerable and not Recursive

We want to find a language which

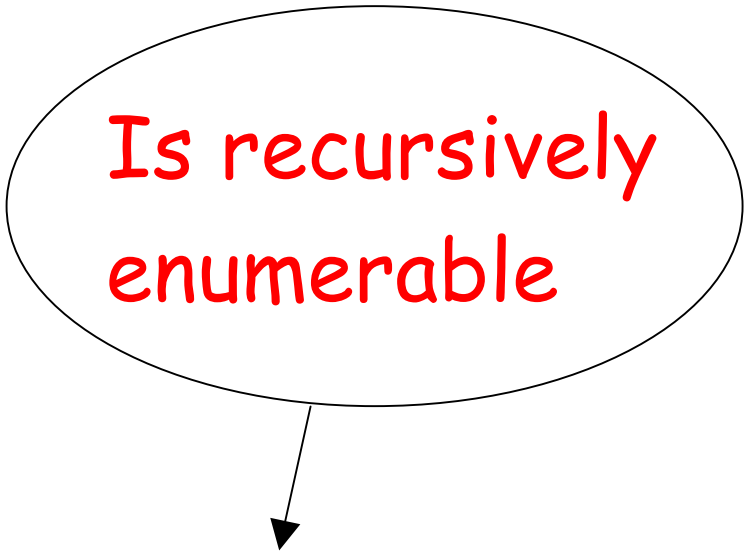

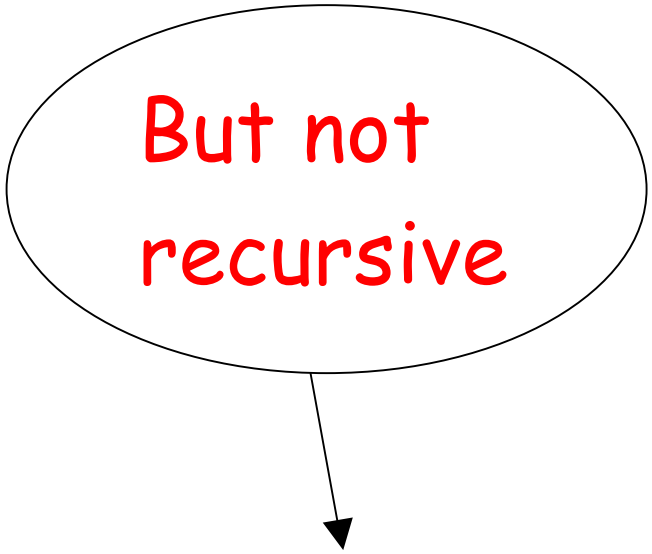

There is a Turing Machine that accepts the language

The machine doesn't halt on some input

We will prove that the language

$$L = \{a^i : a^i \in L(M_i)\}$$

Is recursively enumerable

but not recursive

	a^1	a^2	a^3	a^4	$\cdots$
$L(M_1)$	0	1	0	1	$\cdots$
$L(M_2)$	1	0	0	1	$\cdots$
$L(M_3)$	0	1	1	1	$\cdots$
$L(M_4)$	0	0	0	1	$\cdots$

$$L = \{a^3, a^4, \ldots\}$$

Theorem:

The language $L = \{a^i : a^i \in L(M_i)\}$

is recursively enumerable

Proof:

We will give a Turing Machine that accepts L

Turing Machine that accepts L

For any input string w

- Compute i, for which $w = a^i$
- Find Turing machine M_i

  (using the enumeration procedure for Turing Machines)

- Simulate M_i on input a^i
- If M_i accepts, then accept w

End of Proof

Observation:

Recursively enumerable

$$L = \{a^i : a^i \in L(M_i)\}$$

Not recursively enumerable

$$\overline{L} = \{a^i : a^i \notin L(M_i)\}$$

(Thus, also not recursive)

Theorem:

The language $L = \{a^i : a^i \in L(M_i)\}$

is not recursive

Proof:

Assume for contradiction that L is recursive

Then $\overline{L}$ is recursive:

Take the Turing Machine M that accepts L

M halts on any input:

If M accepts then reject

If M rejects then accept

Therefore:

$\overline{L}$ is recursive

But we know:

$\overline{L}$ is not recursively enumerable

thus, not recursive

CONTRADICTION!!!!

Therefore, L is not recursive

End of Proof
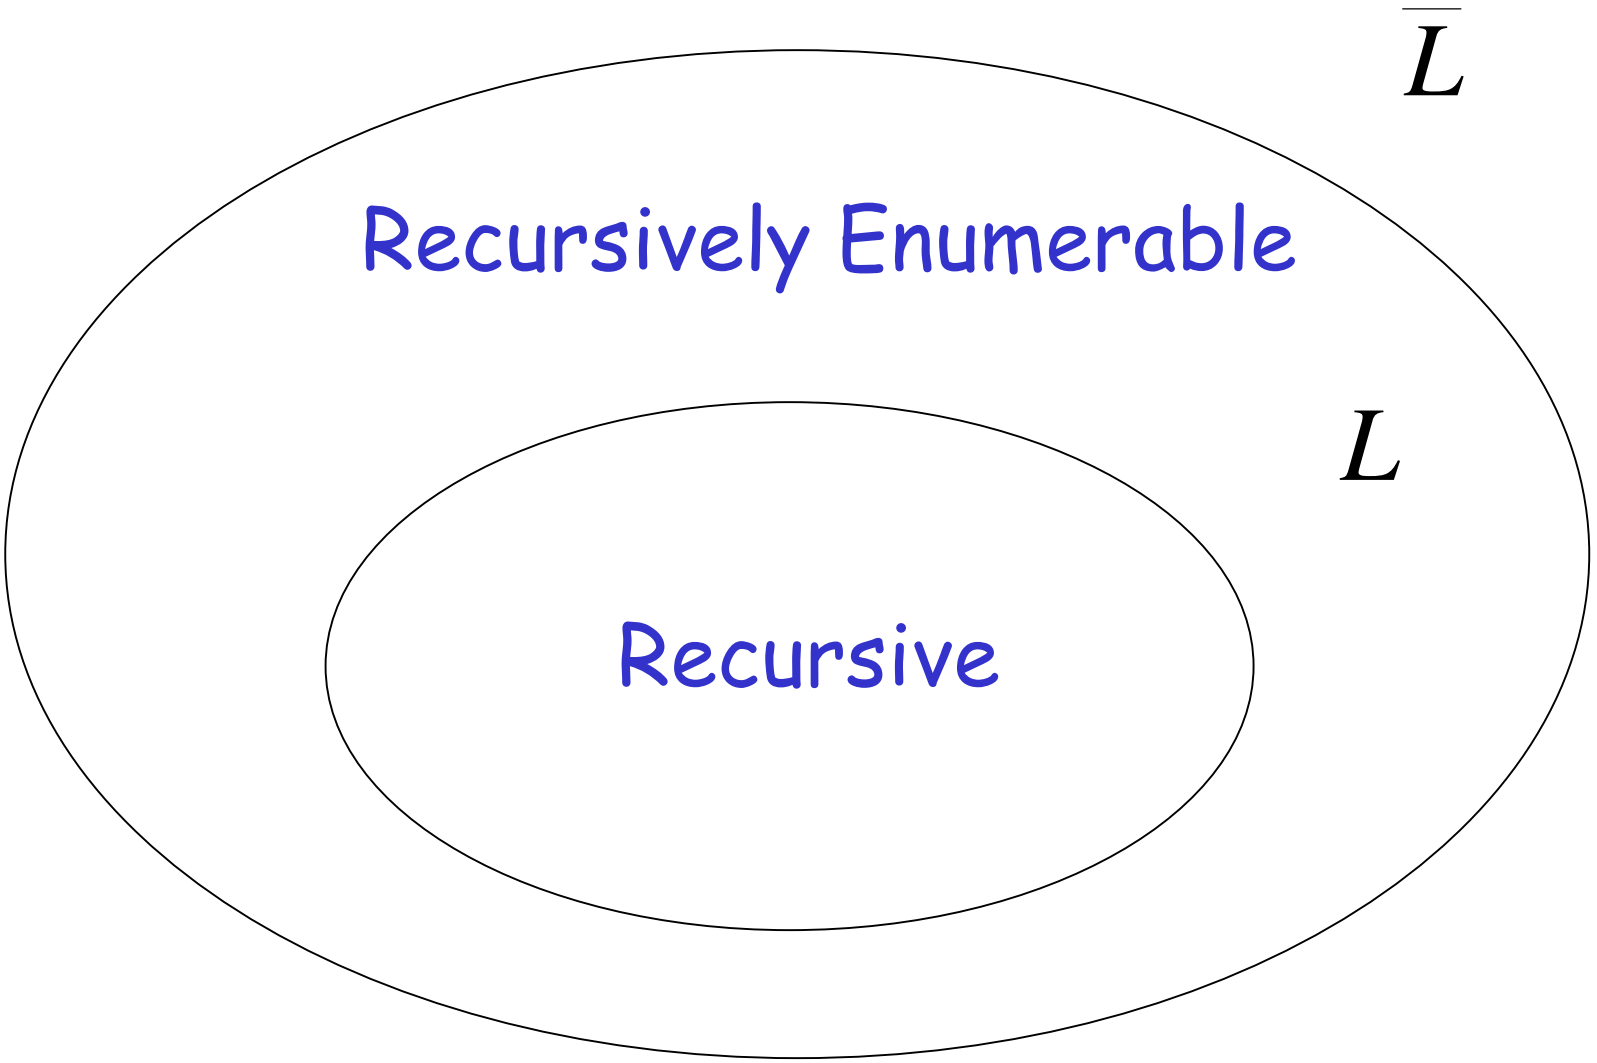
Non Recursively Enumerable