Typing, Parameter Passing, Lazy Evaluation

Dynamic and Static Typing (EPL 4.1-4.4, VRH 2.8.3)
Parameter Passing(VRH 6.1-6.4.4)
Lazy Evaluation (VRH 4.5)

Carlos Varela
Rensselaer Polytechnic Institute
April 29, 2013

Partially adapted with permission from:
Seif Haridi
KTH
Peter Van Roy
UCL

Data types

- A datatype is a set of values and an associated set of operations
- An abstract datatype is described by a set of operations
- These operations are the only thing that a user of the abstraction can assume
- Examples:
  - Numbers, Records, Lists,… (Oz basic data types)
  - Stacks, Dictionaries,… (user-defined secure data types)

Types of typing

- Languages can be ***weakly typed***
  - Internal representation of types can be manipulated by a program
    - e.g., a string in C is an array of characters ending in '\0'.

- ***Strongly typed*** programming languages can be further subdivided into:
  - ***Dynamically typed*** languages
    - Variables can be bound to entities of any type, so in general the type is only known at **run-time**, e.g., Oz, SALSA.
  - ***Statically typed*** languages
    - Variable types are known at **compile-time**, e.g., C++, Java.

Type Checking and Inference

- *Type checking* is the process of ensuring a program is well-typed.
  - One strategy often used is *abstract interpretation:*
    - The principle of getting partial information about the answers from partial information about the inputs
    - Programmer supplies types of variables and type-checker deduces types of other expressions for consistency

- *Type inference* frees programmers from annotating variable types: types are inferred from variable usage, e.g. ML.

Example: The identity function

- In a dynamically typed language, e.g., Oz, it is possible to write a generic function, such as the identity combinator:

```
fun {Id X} X end
```

- In a statically typed language, it is necessary to assign types to variables, e.g. in a **statically typed variant of Oz** you would write:

```
fun {Id X:integer}:integer X end
```

These types are checked at compile-time to ensure the function is only passed proper arguments. `{Id 5}` is valid, while `{Id Id}` is not.

Example: Improper Operations

- In a dynamically typed language, it is possible to write an improper operation, such as passing a non-list as a parameter, e.g. in Oz:

```
declare fun {ShiftRight L}  0|L end
{Browse {ShiftRight 4}}              % unintended missuse
{Browse {ShiftRight [4]}}            % proper use
```

- In a statically typed language, the same code would produce a type error, e.g. **in a statically typed variant of Oz** you would write:

```
declare fun {ShiftRight L:List}:List  0|L end
{Browse {ShiftRight 4}}              % compiler error!!
{Browse {ShiftRight [4]}}            % proper use
```

Example: Type Inference

- In a statically typed language with type inference (e.g., ML), it is possible to write code without type annotations, e.g. using Oz syntax:

```
declare fun {Increment N} N+1 end
{Browse {Increment [4]}}          % compiler error!!
{Browse {Increment 4}}            % proper use
```

- The type inference system knows the type of `'+'` to be:

<number> X **<number>** → **<number>**

Therefore, **`Increment`** must always receive an argument of type **<number>** and it always returns a value of type **<number>.**

Static Typing Advantages

- Static typing restricts valid programs (i.e., reduces language's expressiveness) in return for:
  - Improving error-catching ability
  - Efficiency
  - Security
  - Partial program verification

Dynamic Typing Advantages

- Dynamic typing allows all syntactically legal programs to execute, providing for:
  - Faster prototyping (partial, incomplete programs can be tested)
  - Separate compilation---independently written modules can more easily interact--- which enables open software development
  - More expressiveness in language

Combining static and dynamic typing

- Programming language designers do not have to make an *all-or-nothing* decision on static vs dynamic typing.
  - e.g, Java has a root **`Object`** class which enables *polymorphism*
    - A variable declared to be an **`Object`** can hold an instance of any (non-primitive) class.
    - To enable static type-checking, programmers need to annotate expressions using these variables with *casting* operations, i.e., they instruct the type checker to pretend the type of the variable is different (more specific) than declared.
    - Run-time errors/exceptions can then occur if type conversion (casting) fails.
- Alice (Saarland U.) is a statically-typed variant of Oz.

Parameter Passing Mechanisms

- Operations on data types have arguments and results. Many mechanisms exist to pass these arguments and results between calling programs and abstractions, e.g.:
  - Call by reference
  - Call by variable
  - Call by value
  - Call by value-result
  - Call by name
  - Call by need
- We will show examples in Pascal-like syntax, with semantics given in Oz language.

Call by reference

```
procedure sqr(a:integer, var b:integer);
begin
    b:=a*a
end

var i:integer;
sqr(25, i);
writeln(i);
```

```
proc {Sqr A ?B}
    B=A*A
end

local I in
    {Sqr 25 I}
    {Browse I}
end
```

- The variable passed as an argument can be changed inside the procedure with visible effects outside after the call.
- The **`B`** inside **`Sqr`** is a synonym (an *alias*) of the **`I`** outside.
- The default mechanism in Oz is *call by reference*.

Call by variable

```
procedure sqr(var a:integer);
begin
    a:=a*a
end

var i:integer;
i:=25;
sqr(i);
writeln(i);
```

```
proc {Sqr A}
    A:=@A*@A
end

local I = {NewCell 0} in
    I := 25
    {Sqr I}
    {Browse @I}
end
```

- Special case of *call by reference*.
- The identity of the cell is passed to the procedure.
- The **`A`** inside **`Sqr`** is a synonym (an alias) of the **`I`** outside.

Call by value

```
procedure sqr(a:integer);
begin
    a:=a+1;
    writeln(a*a)
end
var i:integer;
i:=25;
sqr(i);
writeln(i);
```

```
proc {Sqr A}
    C = {NewCell A}
in
    C := @C + 1
    {Browse @C*@C}
end

{Sqr 25}
```

- A value is passed to the procedure. Any changes to the value inside the procedure are purely local, and therefore, **not** visible outside.
- The local cell **`C`** is initialized with the argument **`A`** of **`Sqr`**.
- Java uses call by value for both primitive values and object references.
- SALSA uses call by value in both local and remote message sending.

Call by value-result

```
procedure sqr_inc(inout a:integer);
begin
    a:=a*a
    a:= a+1
end

var i:integer;
i:=25;
sqr_inc(i);
writeln(i);
```

```
proc {SqrInc A}
    D = {NewCell @A}
in
    D := @D * @D
    D := @D + 1
    A := @D
end
local C = {NewCell 0} in
    C := 25
    {SqrInc C}
    {Browse @C}
end
```

- A modification of call by variable. Variable argument can be modified.
- There are two mutable variables: one inside **`Sqr`** (namely **`D`**) and one outside (namely **`C`**). Any *intermediate* changes to the variable inside the procedure are purely local, and therefore, **not** visible outside.
- inout is ADA terminology.

Call by name

```
procedure sqr(callbyname a:integer);
begin
    a:=a*a
end

var i:integer;
i:=25;
sqr(i);
writeln(i);
```

```
proc {Sqr A}
    {A} := @{A} * @{A}
end

local C = {NewCell 0} in
    C := 25
    {Sqr fun {$} C end}
    {Browse @C}
end
```

- Call by name creates a function for each argument (a *thunk*). Calling the function evaluates and returns the argument. Each time the argument is needed inside the procedure, the thunk is called.
- Thunks were originally invented for Algol 60.

Call by need

```
procedure sqr(callbyneed a:integer);
begin
    a:=a*a
end

var i:integer;
i:=25;
sqr(i);
writeln(i);
```

```
proc {Sqr A}
    B = {A}  % only if argument used!!
in
    B := @B * @B
end

local C = {NewCell 0} in
    C := 25
    {Sqr fun {$} C end}
    {Browse @C}
end
```

- A modification of *call by name*. The thunk is evaluated **at most** once. The result is stored and used for subsequent evaluations.
- *Call by need* is the same as lazy evaluation. Haskell uses lazy evaluation.
- *Call by name* is lazy evaluation without memoization.

Which one is *right* or *best*?

- It can be argued that *call by reference* is the most primitive.
  - Indeed, we have coded different parameter passing styles using *call by reference* and a combination of cells and procedure values.
  - Arguably, *call by value* (along with cells and procedure values) is just as general. E.g., the example given for *call by variable* would also work in a *call by value* primitive mode. Exercise: Why?
- When designing a language, the question is: for which mechanism(s) to provide linguistic abstractions?
  - It largely depends on intended language use, e.g., *call by name* and *call by need* are integral to programming languages with lazy evaluation (e.g., Haskell and Miranda.)
  - For concurrent programs, *call by value-result* can be very useful (e.g. Ada.)
  - For distributed programs, *call by value* is best due to state encapsulation (e.g., SALSA).

More parameter passing styles

- Some languages for distributed computing have support for ***call-by-move***.
  - Arguments to remote procedure calls are temporarily migrated to the remote location for the time of the remote procedure execution (e.g., Emerald).
  - A dual approach is to migrate the object whose method is to be invoked to the client side before method invocation (e.g., Oz).

- Java Remote Method Invocation (RMI) dynamically determines mechanism to use depending on argument types:
  - It uses *call by reference* in remote procedure calls, if and only if, arguments implement a special (`Remote`) interface
  - Otherwise, arguments are passed using *call by value*.
    - => Semantics of method invocation is different for local and remote method invocations!!
  - There is no language support for object migration in Java (as there is in other languages, e.g., SALSA, Oz, Emerald), so *call by move* is not possible.

Lazy evaluation

- The default functions in Oz are evaluated *eagerly* (as soon as they are called)
- Another way is lazy evaluation where a computation is done only when the result is needed

- Calculates the infinite list:
  0 | 1 | 2 | 3 | ...

```
declare
fun lazy {Ints N}
   N|{Ints N+1}
end
```

Lazy evaluation (2)

- Write a function that computes as many rows of Pascal's triangle as needed
- We do not know how many beforehand
- A function is *lazy* if it is evaluated only when its result is needed
- The function PascalList is evaluated when needed

```
fun lazy {PascalList Row}
   Row | {PascalList
          {AddList
           Row
           {ShiftRight Row}}}
end
```

Lazy evaluation (3)

- Lazy evaluation will avoid redoing work if you decide first you need the 10^{th} row and later the 11^{th} row
- The function continues where it left off

```
declare
L = {PascalList [1]}
{Browse L}
{Browse L.1}
{Browse L.2.1}
```

```
L<Future>
[1]
[1 1]
```

Lazy execution

- Without lazyness, the execution order of each thread follows textual order, i.e., when a statement comes as the first in a sequence it will execute, whether or not its results are needed later
- This execution scheme is called *eager execution*, or *supply-driven* execution
- Another execution order is that a statement is executed only if its results are needed somewhere in the program
- This scheme is called *lazy evaluation*, or *demand-driven* evaluation (some languages use lazy evaluation by default, e.g., Haskell)

Example

B = {F1 X}

C = {F2 Y}

D = {F3 Z}

A = B+C

- Assume F1, F2 and F3 are lazy functions
- B = {F1 X} and C = {F2 Y} are executed only if and when their results are needed in A = B+C
- D = {F3 Z} is not executed since it is not needed

Example

- In lazy execution, an operation suspends until its result is needed
- The suspended operation is triggered when another operation needs the value for its arguments
- In general multiple suspended operations could start concurrently

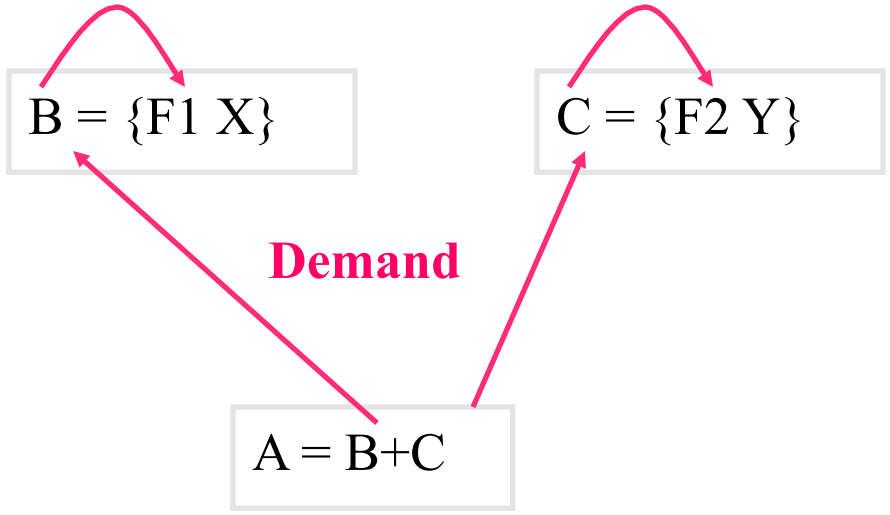

Example II

- In data-driven execution, an operation suspends until the values of its arguments results are available
- In general the suspended computation could start concurrently

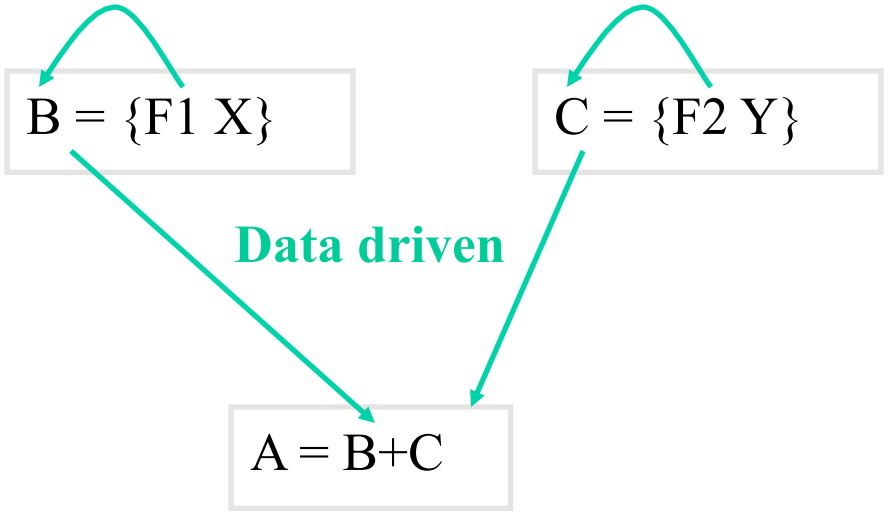

Using Lazy Streams

```
fun {Sum Xs A Limit}
   if Limit>0 then
      case Xs of X|Xr then
         {Sum Xr A+X Limit-1}
      end
   else A end
end
```

```
local Xs S in
   Xs={Ints 0}
   S={Sum Xs 0 1500}
   {Browse S}
end
```

How does it work?

```
fun {Sum Xs A Limit}
   if Limit>0 then
      case Xs of X|Xr then
         {Sum Xr A+X Limit-1}
      end
   else A end
end
```

```
fun lazy {Ints N}
   N | {Ints N+1}
end

local Xs S in
   Xs = {Ints 0}
   S={Sum Xs 0 1500}
   {Browse S}
end
```

Improving throughput

- Use a lazy buffer
- It takes a lazy input stream In and an integer N, and returns a lazy output stream Out
- When it is first called, it first fills itself with N elements by asking the producer
- The buffer now has N elements filled
- Whenever the consumer asks for an element, the buffer in turn asks the producer for another element

The buffer example

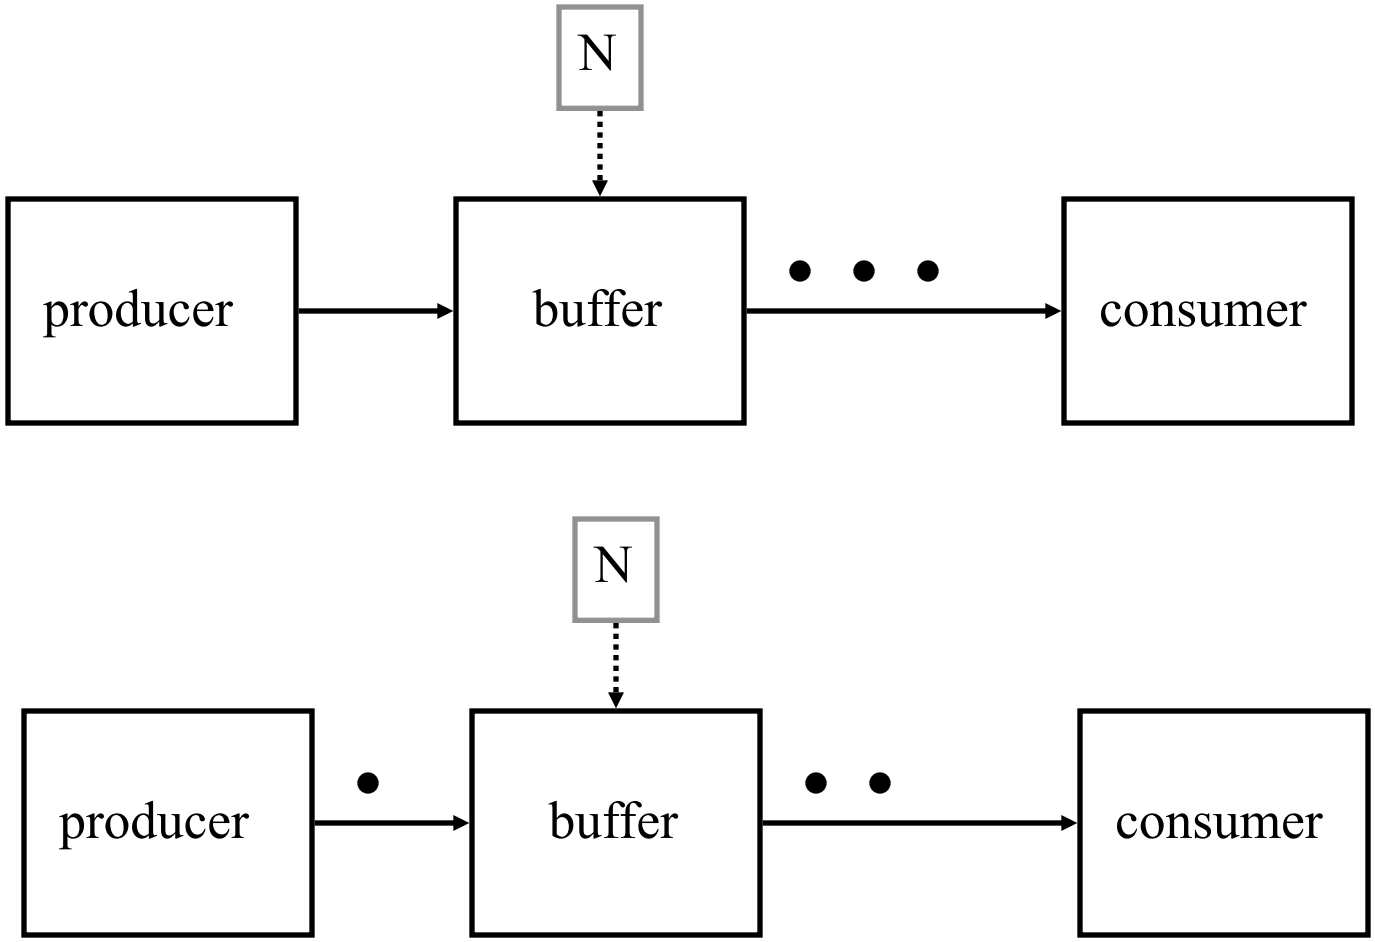

The buffer

```
fun {Buffer1 In N}
   End={List.drop In N}

   fun lazy {Loop In End}
      In.1|{Loop In.2 End.2}
   end
in
   {Loop In End}
end
```

Traversing the In stream, forces the producer to emit N elements

The buffer II

```
fun {Buffer2 In N}
   End = thread
            {List.drop In N}
         end
   fun lazy {Loop In End}
      In.1|{Loop In.2 End.2}
   end
in
  {Loop In End}
end
```

Traversing the In stream, forces the producer to emit N elements and at the same time serves the consumer

The buffer III

```
fun {Buffer3 In N}
   End = thread
            {List.drop In N}
         end
   fun lazy {Loop In End}
      E2 = thread End.2 end
      In.1|{Loop In.2 E2}
   end
in
  {Loop In End}
end
```

Traverse the In stream, forces the producer to emit N elements and at the same time serves the consumer, and requests the next element ahead

Larger Example: The Sieve of Eratosthenes

- Produces prime numbers
- It takes a stream 2...N, peals off 2 from the rest of the stream
- Delivers the rest to the next sieve

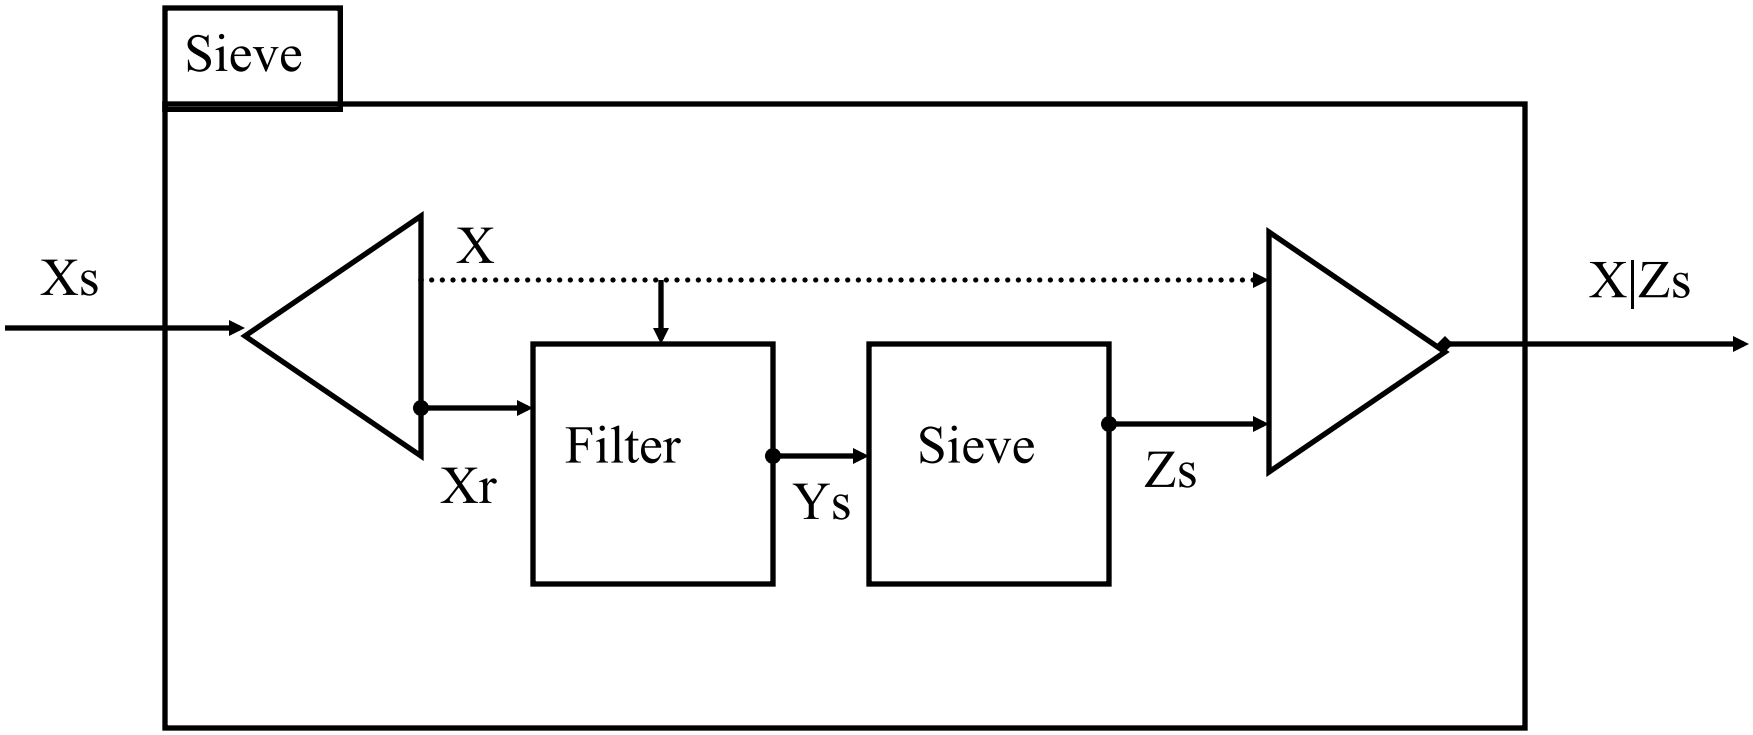

Lazy Sieve

```
fun lazy {Sieve Xs}
   X|Xr = Xs in
   X | {Sieve {LFilter
          Xr
          fun {$ Y} Y mod X \= 0 end
         }}
end

fun {Primes} {Sieve {Ints 2}} end
```

Lazy Filter

For the Sieve program we need a lazy filter

```
fun lazy {LFilter Xs F}
   case Xs
   of nil then nil
   [] X|Xr then
      if {F X} then X|{LFilter Xr F} else {LFilter Xr F} end
   end
end
```

Define streams implicitly

- Ones = 1 | Ones
- Infinite stream of ones

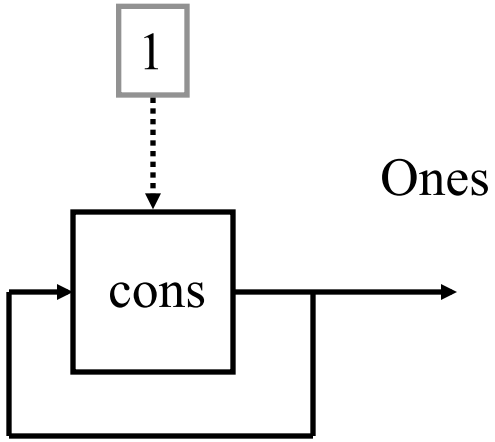

Define streams implicitly

- Xs = 1 | {LMap Xs
  fun {$ X} X+1 end}
- What is Xs ?

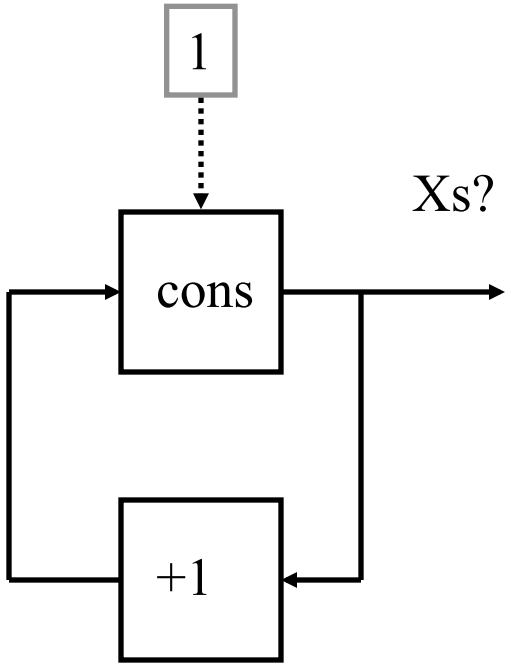

The Hamming problem

- Generate the first N elements of stream of integers of the form: $2^a 3^b 5^c$ with a,b,c ≥ 0 (in ascending order)

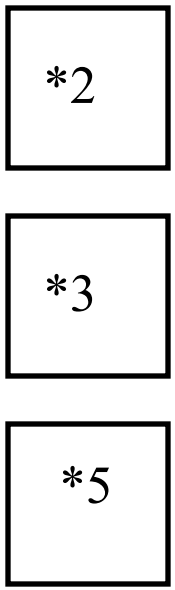

The Hamming problem

- Generate the first N elements of stream of integers of the form: $2^a 3^b 5^c$ with a,b,c ≥ 0 (in ascending order)

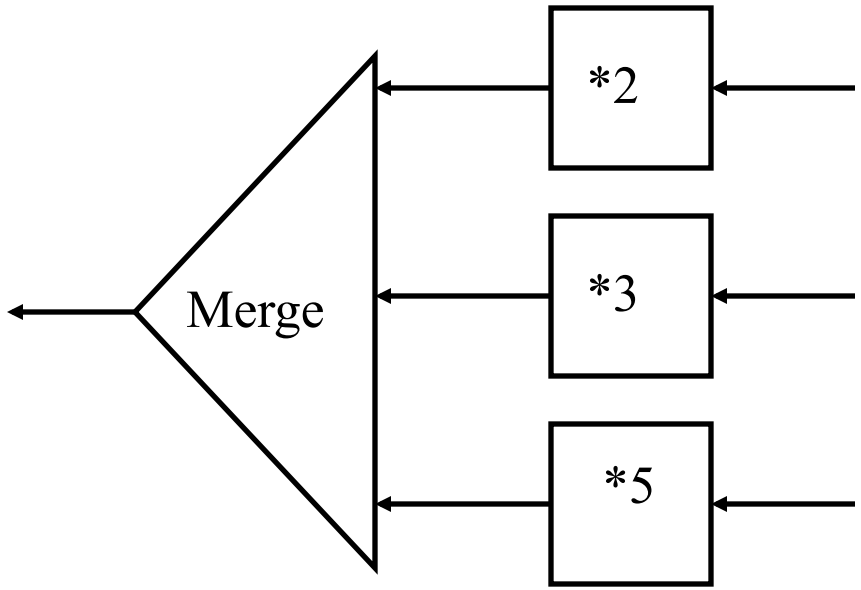

The Hamming problem

- Generate the first N elements of stream of integers of the form: $2^a 3^b 5^c$ with a,b,c ≥ 0 (in ascending order)

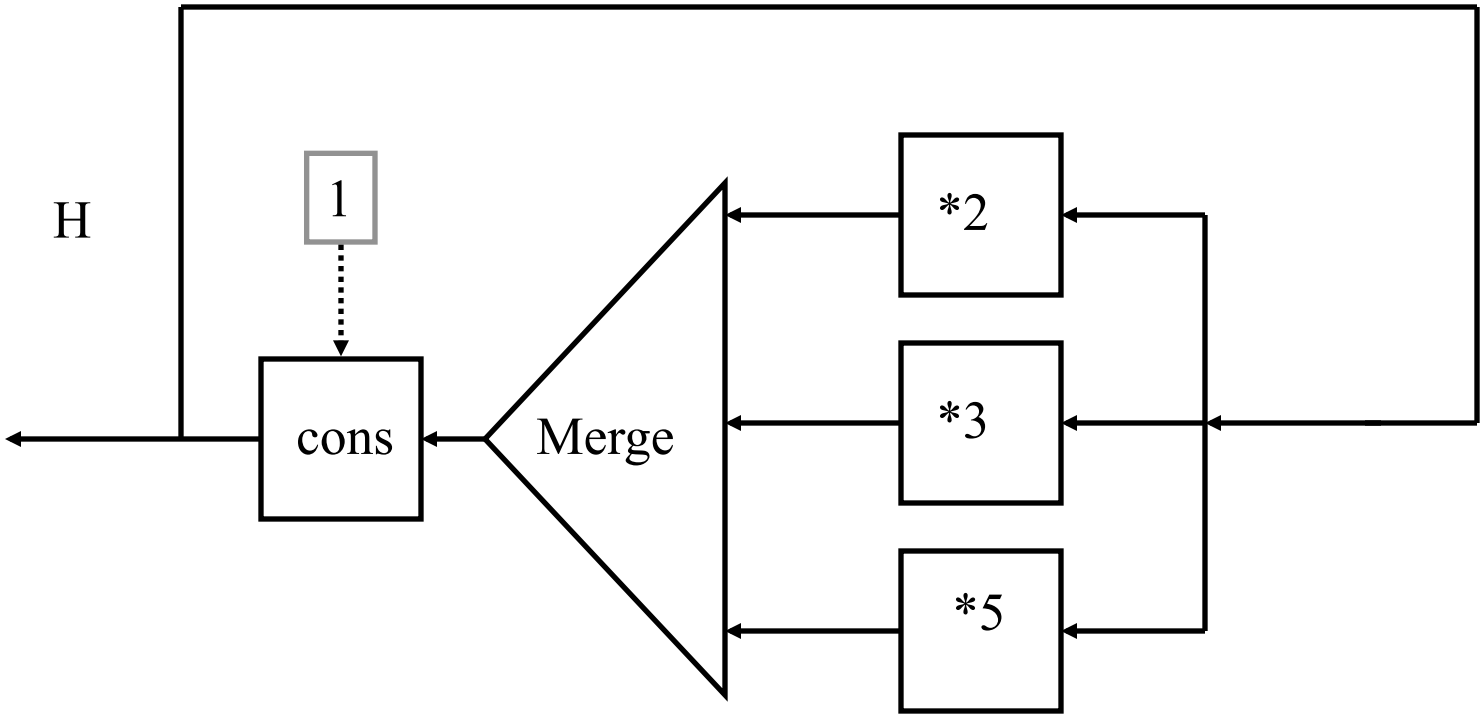

Lazy File Reading

```
fun {ToList FO}
   fun lazy {LRead} L T in
      if {File.readBlock FO L T} then
         T = {LRead}
      else T = nil {File.close FO} end
      L
   end
   {LRead}
end
```

- This avoids reading the whole file in memory

List Comprehensions

- Abstraction provided in lazy functional languages that allows writing higher level set-like expressions
- In our context we produce lazy lists instead of sets
- The mathematical set expression
  - $\{x*y \mid 1 \leq x \leq 10, 1 \leq y \leq x\}$
- Equivalent List comprehension expression is
  - [X*Y | X = 1..10 ; Y = 1..X]
- Example:
  - [1*1 2*1 2*2 3*1 3*2 3*3 ... 10*10]

List Comprehensions

- The general form is
- [f(x,y, ...,z) | x ← gen(a1,...,an) ; guard(x,...)
  y ← gen(x, a1,...,an) ; guard(y,x,...)
  ....
  ]
- No linguistic support in Mozart/Oz, but can be easily expressed

Example 1

- z = [x#x | x ← from(1,10)]
- Z = {LMap {LFrom 1 10} fun{$ X} X#X end}

- z = [x#y | x ← from(1,10), y ← from(1,x)]
- Z = {LFlatten
  {LMap {LFrom 1 10}
  fun{$ X} {LMap {LFrom 1 X}
  fun {$ Y} X#Y end
  }
  end
  }
  }

Example 2

- z = [x#y | **x** ← from(1,10), **y** ← from(1,**x**), **x**+**y**≤10]
- Z ={**LFilter**

```
{LFlatten
   {LMap {LFrom 1 10}
    fun{$ X} {LMap {LFrom 1 X}
                 fun {$ Y} X#Y end
                }
    end
   }
}
fun {$ X#Y} X+Y=<10 end} }
```

Implementation of lazy execution

The following defines the syntax of a statement, ⟨s⟩ denotes a statement

⟨**s**⟩ ::= **skip** *empty statement*

| **...**

| **thread** ⟨$\mathbf{s_1}$⟩ **end** *thread creation*

| **{ByNeed fun{$}** ⟨**e**⟩ **end** ⟨***x***⟩**}** *by need statement*

zero arity function

variable

Implementation

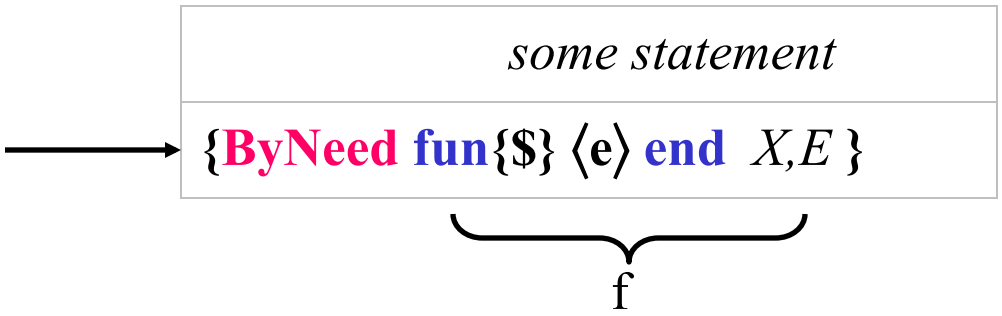

stack

store

f

x

A function value is created in the
store (say f)
the function *f* is associated with
the variable *x*

execution proceeds
immediately to next statement

Implementation

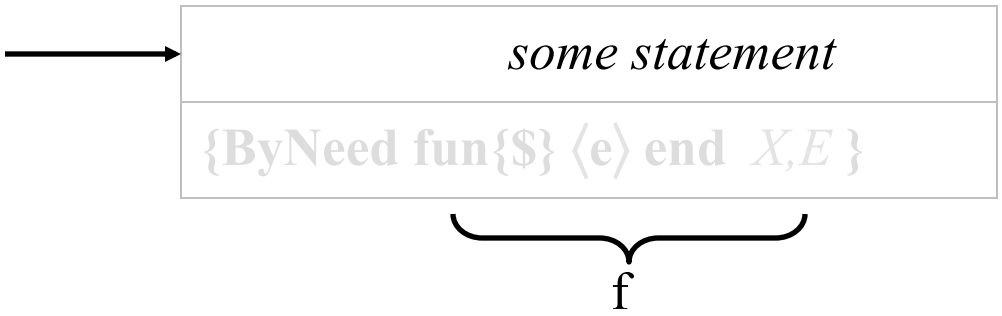

stack

store

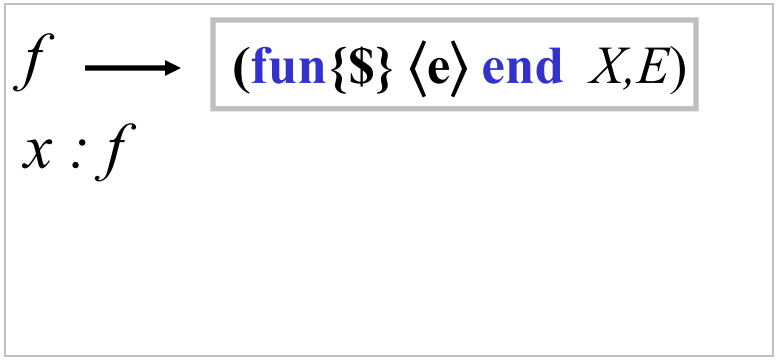

A function value is created in the
store (say f)
the function *f* is **associated** with
the variable *x*
execution proceeds
immediately to next statement

Accessing the ByNeed variable

- X = {ByNeed fun{$} 111*111 end} (by thread T0)

- Access by some thread T1
  - if X > 1000 then {Browse hello#X} end

    or

  - {Wait X}
  - Causes X to be bound to 12321 (i.e. 111*111)

Implementation

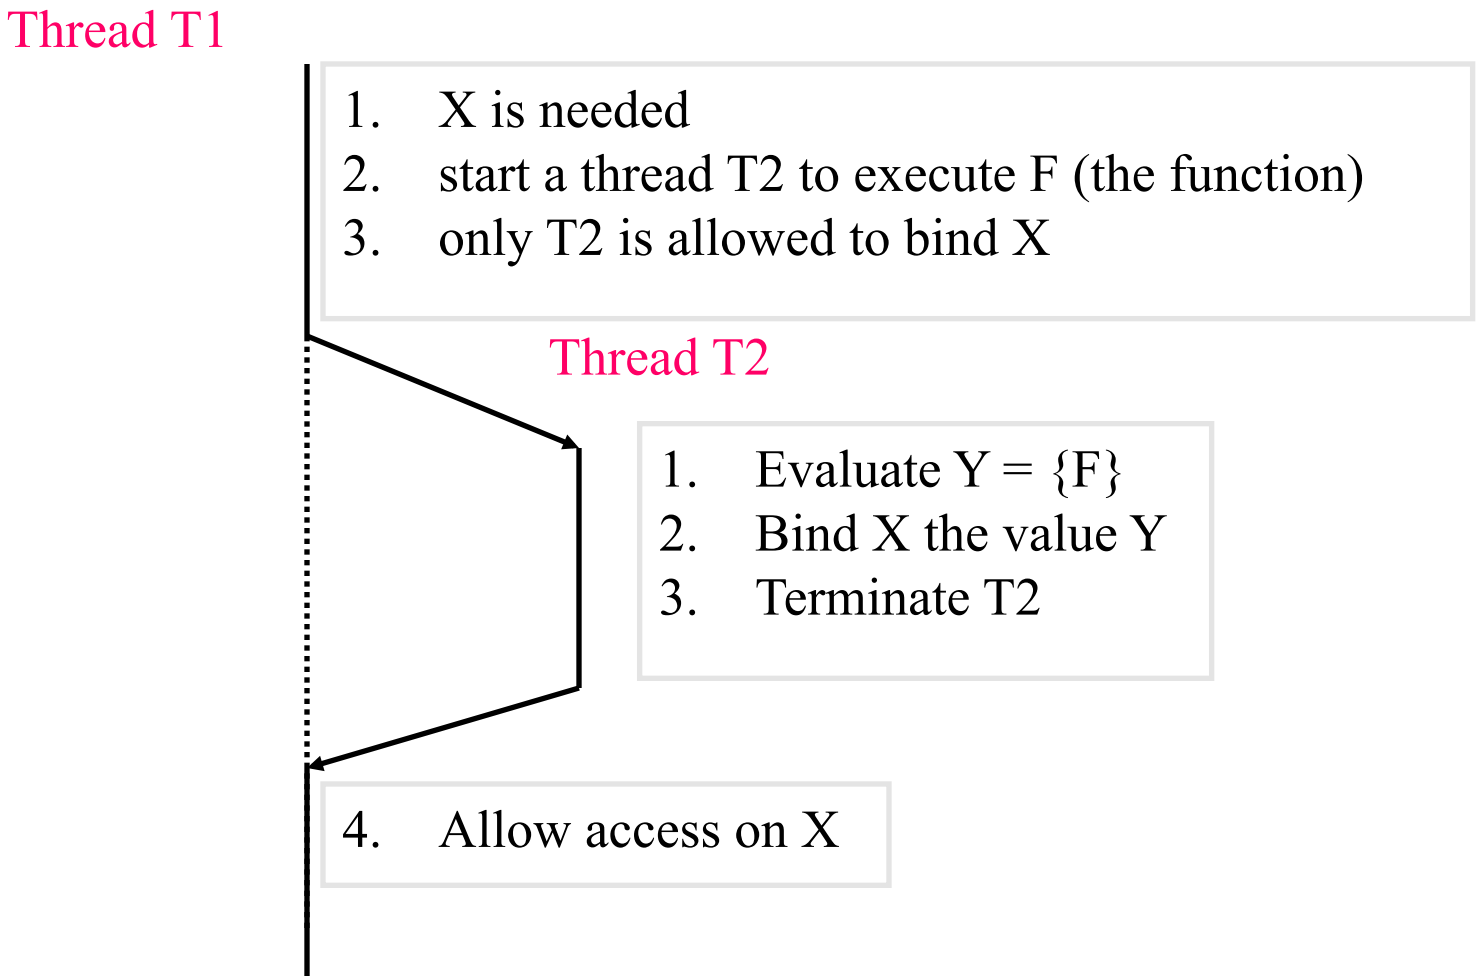

Lazy functions

```
fun lazy {Ints N}
   N | {Ints N+1}
end
```



```
fun {Ints N}
   fun {F} N | {Ints N+1} end
in {ByNeed F}
end
```

Exercises

87. VRH Exercise 6.10.2 (page 482).
88. Explain why the *call by variable* example given would also work over a *call by value* primitive parameter passing mechanism. Give an example for which this is not the case.
89. Explain why *call by need* cannot always be encoded as shown in the given example by producing a counter-example. (Hint: recall the difference between normal order evaluation and applicative order evaluation in termination of lambda calculus expression evaluations.)
90. Create a program in which *call by name* and *call by need* parameter passing styles result in different outputs.
91. Can type inference always deduce the type of an expression?
    - If not, give a counter-example. How would you design a language to help it statically infer types for non-trivial expressions?

Exercises

92. Write a lazy append list operation `LazyAppend`. Can you also write `LazyFoldL`? Why or why not?
93. Exercise VRH 4.11.10 (pg 341)
94. Exercise VRH 4.11.13 (pg 342)
95. Exercise VRH 4.11.17 (pg 342)